


VRA_D-5W & VRB_D-5W Series 5W, 2:1 WIDE INPUT, ISOLATED & REGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER



Patent Protection RoHS

PART NUMBER SYSTEM

VRA2405D-5W

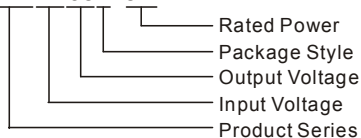

FEATURES

- Efficiency up to 85%
- 1.5KVDC Isolation
- Operating temperature: -40°C ~ +85°C
- Metal shielding package
- Industry standard pinout
- Good Performance Under Both High and Low Temperature, Meet Industrial Technical Requirements

APPLICATIONS

The VRA_D-5W & VRB_D-5W series are designed for application where isolated output is required from a distributed power system.

These products apply to where:

- 1) Input voltage range: $\leq 2:1$;
- 2) 1.5KV input and output isolation;
- 3) Regulated and low ripple noise is required.

SELECTION GUIDE

Model Number	Input Voltage(VDC)		Output Voltage (VDC)	Output Current (mA)		Input Current (mA)(typ.)		Reflected Ripple Current (mA,typ.)	Max. Capacitive Load# (μF)	Efficiency (% , typ.) @Max. Load
	Nominal (Range)	Max*		Max.	Min.	@Max. Load	@No Load			
VRA1205D-5W	12 (9-18)	20	±5	±500	±50	521	13	50	1430	77
VRA1209D-5W			±9	±278	±27	520	—		—	80
VRA1212D-5W			±12	±210	±21	504	15		200	82
VRA1215D-5W			±15	±166	±16	511	19		100	80
VRA1224D-5W			±24	±105	±10	526	32		47	84
VRB1205D-5W			5	1000	100	509	6		8570	78
VRB1209D-5W			9	556	55	494	15		470	80
VRB1212D-5W			12	420	42	500	17		288	82
VRB1215D-5W			15	330	33	247	17		241	82
VRB1224D-5W			24	200	20	471	23		68	83
VRA2405D-5W	24 (18-36)	40	±5	±500	±50	252	4	50	727	80
VRA2409D-5W			±9	±278	±27	242	8		503	82
VRA2412D-5W			±12	±210	±21	245	10		330	83
VRA2415D-5W			±15	±166	±16	246	9		247	83
VRA2424D-5W			±24	±105	±10	248	12		68	84
VRB2405D-5W			5	1000	100	258	6		2000	80
VRB2409D-5W			9	556	55	241	6		388	82
VRB2412D-5W			12	420	42	245	7		300	84
VRB2415D-5W			15	330	33	247	8		538	84
VRB2424D-5W			24	200	20	230	11		68	85
VRA4805D-5W	48 (36-75)	80	±5	±500	±50	125	—	150	—	82
VRA4809D-5W			±9	±278	±27	127	—		—	81
VRA4812D-5W			±12	±210	±21	121	5		160	85
VRA4815D-5W			±15	±166	±16	123	5		159	85
VRA4824D-5W			±24	±105	±10	120	—		—	86
VRB4805D-5W			5	1000	100	126	2		1780	82
VRB4809D-5W			9	556	55	127	—		—	84
VRB4812D-5W			12	420	42	126	10		617	85
VRB4815D-5W			15	330	33	122	—		—	85
VRB4824D-5W			24	200	20	124	—		—	86

Note: 1. Models listed with strike-through text have been officially discontinued.

2. *Input voltage can't exceed this value, or will cause the permanent damage.

3. # For each output.

INPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage (1000 ms)	12VDC Input Models	-0.7	--	25	VDC
	24VDC Input Models	-0.7	--	50	
	48VDC Input Models	-0.7	--	100	
Start-up Voltage	12VDC Input Models	--	--	9	
	24VDC Input Models	--	--	18	
	48VDC Input Models	--	--	36	
Under Voltage Shutdown	12VDC Input Models	--	--	9	
	24VDC Input Models	--	--	18	
	48VDC Input Models	--	--	36	
Start-up Time	Nominal input& constant resistance load	--	300	--	ms
Short Circuit Input Power		--	0.5	--	W
No-load power consumption		--	500	--	mW
Input Filter		L Filter			

OUTPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Output Power		0.5	--	5	W
Positive voltage accuracy	Refer to recommended circuit	--	±1	±3	%
Negative voltage accuracy		--	±3	±5	
Output Voltage Balance	Dual Output, Balanced Loads	--	±0.5	±1	
Line Regulation	Full load, Input voltage from low to high	--	±0.2	±0.5	
Load Regulation	10% to 100% load	--	±0.5	±2	
Transient Recovery Time	25%~ 50%~25% load or	--	300	500	µs
Transient Response Deviation	50%~75%~50% load step change	--	±3	±5	%
Temperature Drift	100% full load	--	±0.02	--	%/°C
Ripple*	20MHz Bandwidth	--	30	50	mVp-p
Noise*		--	100	150	
Over Current Protection	Full input voltage	120	--	--	%
Short Circuit Protection		Continuous, automatic recovery			

Note: 1.Dual output models unbalanced load: ±5%.

2.*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

COMMON SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Tested for 1 minute and leakage current less than 1 mA	1500	--	--	VDC
Isolation Resistance	Test at 500VDC	500	--	--	MΩ
Isolation Capacitance	Input/Output, 100KHz/0.1V	--	1000	--	pF
Switching Frequency	Full load, nominal input	--	300	--	KHz
MTBF	MIL-HDBK-217F@25℃	1000	--	--	K hours
Case Material		Aluminous alloy			
Weight		--	15	--	g


ENVIRONMENTAL SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Storage Humidity	Non condensing	5	--	95	%
Operating Temperature	Power derating (above 71 °C)	-40	--	85	°C
Storage Temperature		-55	--	125	
Temp. rise allowed at full load	Operating Temperature curve range	--	75	--	
Lead Temperature	1.5mm from case for 10 seconds	--	--	300	
Cooling		Free air convection			

EMC SPECIFICATIONS

EMI	CE	CISPR22/EN55022	CLASS A (External Circuit Refer to Figure1-②)
EMS	ESD	IEC/EN61000-4-2	Contact ±4KV perf. Criteria B
	EFT	IEC/EN61000-4-4	±2KV perf. Criteria B (External Circuit Refer to Figure 1-①)
	Surge	IEC/EN61000-4-5	±2KV perf. Criteria B (External Circuit Refer to Figure 1-①)

EMC RECOMMENDED CIRCUIT

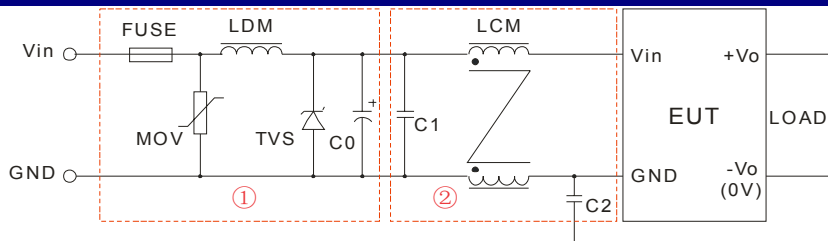

(Figure1)

VRD_D-5W Recommended external circuit parameters:


Model		Vin: 12V	Vin: 24V	Vin: 48V
EMS	FUSE	Choose according to practical input current		
	MOV	--	10D560K	10D101K
	LDM	--	56μH	56μH
	TVS	SMCJ28A	SMCJ48A	SMCJ90A
	C0	680μF/25V	120μF/50V	120μF/100V
EMI	C1	4.7μF/50V	4.7μF/50V	4.7μF/100V
	LCM	9.5mH	9.5mH	9.5mH
	C2	100pF/2KV	100pF/2KV	100pF/2KV

VRB_D-5W Recommended external circuit parameters:

Model		Vin: 12V	Vin: 24V	Vin: 48V
EMS	FUSE	Choose according to practical input current		
	MOV	--	10D560K	10D101K
	LDM	--	56μH	56μH
	TVS	SMCJ28A	SMCJ48A	SMCJ90A
	C0	680μF/25V	120μF/50V	120μF/100V
EMI	C1	--	4.7μF/50V	4.7μF/100V
	LCM	--	1.27mH	9.5mH
	C2	--	--	100pF/2KV






Note: 1. In Figure 1, part ① is EMS Recommended external circuit, part ② is EMI recommended external circuit. Choose according to requirements.
2. If there is no recommended parameters, the model no require the external component.

EMC RECOMMENDED CIRCUIT PCB LAYOUT

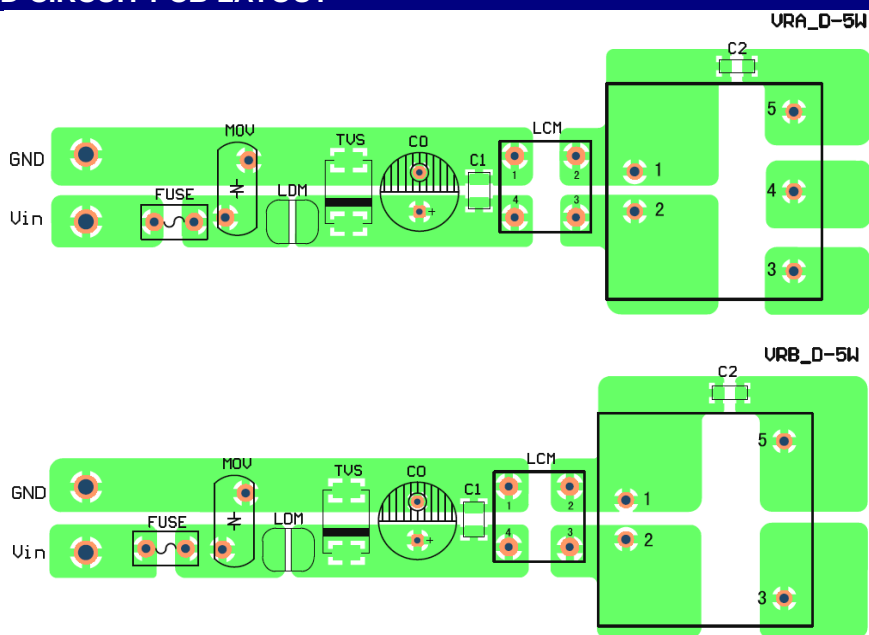


(Figure 2)

PRODUCT TYPICAL CURVE

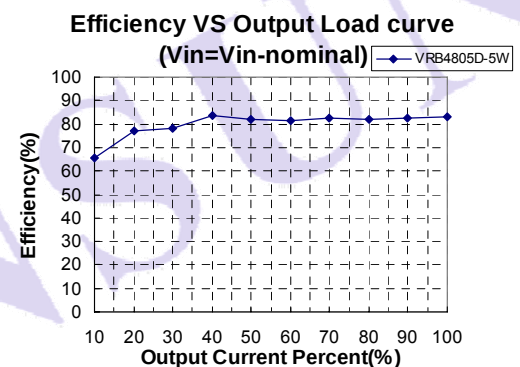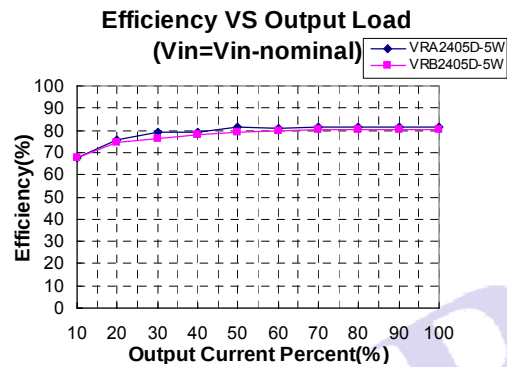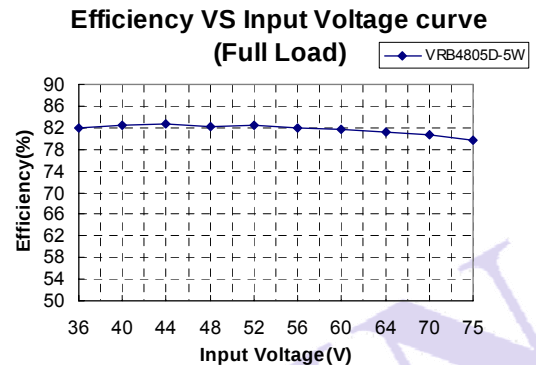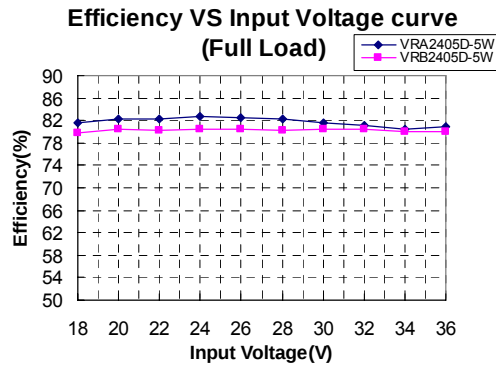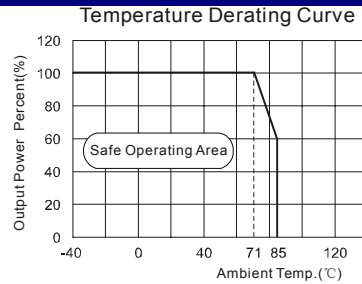


OUTLINE DIMENSIONS, RECOMMENDED FOOTPRINT & PACKAGING

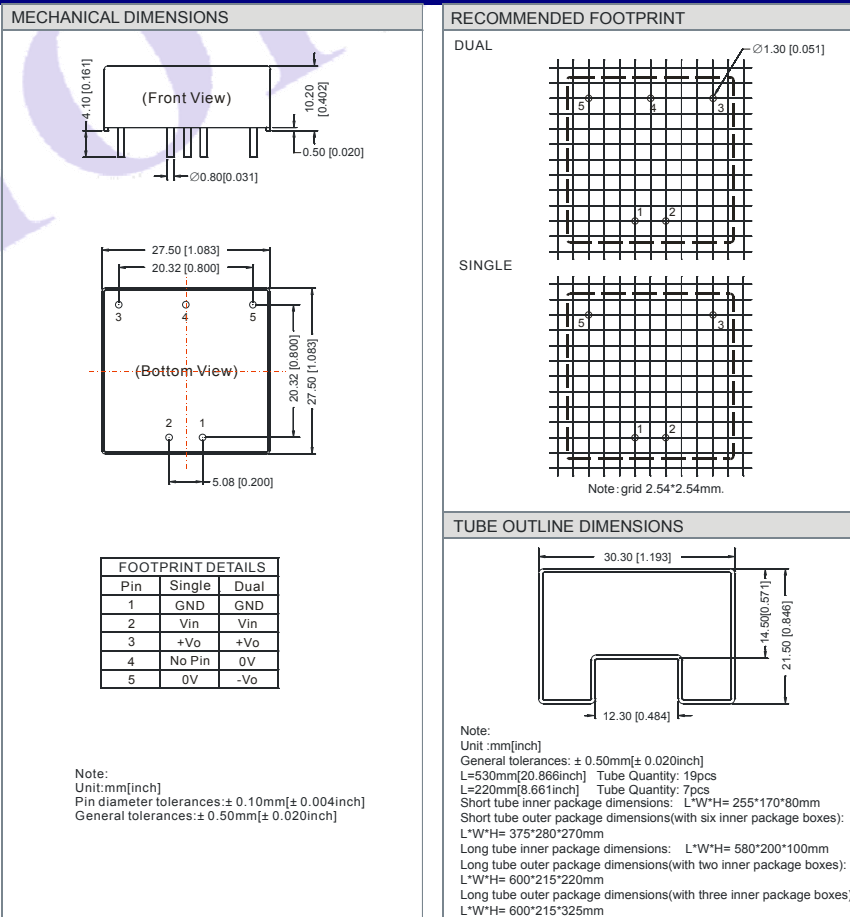

TEST CONFIGURATIONS

Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} and C_{in} to simulate source impedance.

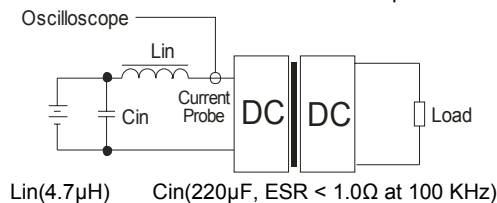

DESIGN CONSIDERATIONS

1) Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load **could not be less than 10% of the full load**. If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.


2) Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is add a circuit breaker to the circuit.

3) Recommended circuit

All the VRA_D-5W&VRB_D-5W Series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load. Never be tested under no load (see Figure 3).

If you want to further decrease the output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance can't exceed the maximum capacitor load in the list (Table 1).

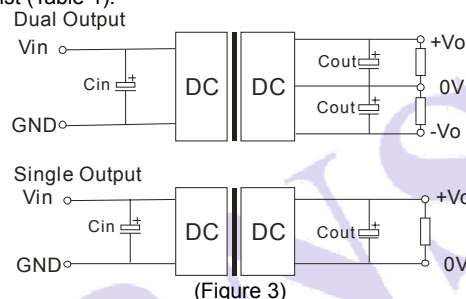

EXTERNAL CAPACITOR TABLE (TABLE 1)

Output Voltage	Capacitance	Cout# (μF)	Cin(μF)
Single	5V	220	100
	12V,15V	100	
	24V	47	
Dual	±5V	100	
	±12V,±15	47	
	±24V	22	

Note: # For each output.

4) No parallel connection or plug and play

Note:

1. The load shouldn't be less than 10%, otherwise ripple will increase dramatically. Operation under minimum load will not damage the converter; However, they may not meet all specification listed, and that will reduce the life of product.
2. Max. Capacitive Load tested at nominal input voltage, full load and constant resistive load.
3. All specifications measured at $T_a=25^{\circ}\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
4. In this datasheet, all the test methods of indications are based on corporate standards.
5. Only typical models listed, other models may be different, please contact our technical person for more details.
6. Our company offer custom products.
7. Specifications subject to change without notice.

MORNSUN Science & Technology Co.,Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou,P.R.China.

Tel: 86-20-38601850

Fax:86-20-38601272

[Http://www.mornsun-power.com](http://www.mornsun-power.com)