

Silicon NPN Power Transistors

2SC3284

DESCRIPTION


- With TO-3PN package
- Complement to type 2SA1303

APPLICATIONS

- Audio and general purpose

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

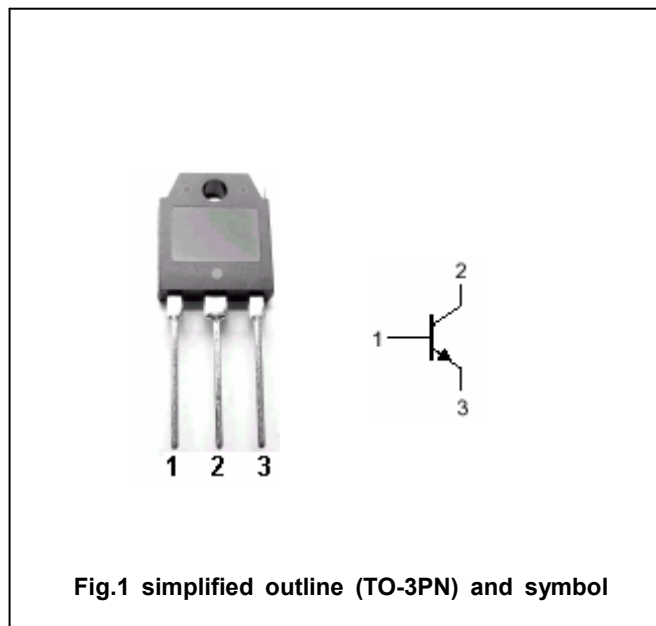**Absolute maximum ratings(Ta=□)**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	150	V
V_{CEO}	Collector-emitter voltage	Open base	150	V
V_{EBO}	Emitter-base voltage	Open collector	5	V
I_C	Collector current		14	A
I_B	Base current		3	A
P_C	Collector power dissipation	$T_C=25^\circ$	125	W
T_j	Junction temperature		150	□
T_{stg}	Storage temperature		-55~150	□

Silicon NPN Power Transistors

2SC3284

CHARACTERISTICS

Tj=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=25mA ; I_B=0$	150			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=5A ; I_B=0.5A$			2.0	V
I_{CBO}	Collector cut-off current	$V_{CB}=150V ; I_E=0$			100	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=5V ; I_C=0$			100	μA
h_{FE}	DC current gain	$I_C=5A ; V_{CE}=4V$	50		180	
C_{ob}	Output capacitance	$I_E=0 ; V_{CB}=10V ; f=1MHz$		200		pF
f_T	Transition frequency	$I_E=-2A ; V_{CE}=12V$		60		MHz

Switching times

t_{on}	Turn-on time	$I_C=5A ; R_L=12\Omega$ $I_{B1}=-I_{B2}=0.5A$ $V_{CC}=60V$		0.20		μs
t_s	Storage time			1.50		μs
t_f	Fall time			0.35		μs


◆ h_{FE} Classifications

O	P	Y
50-100	70-140	90-180

Silicon NPN Power Transistors

2SC3284

PACKAGE OUTLINE

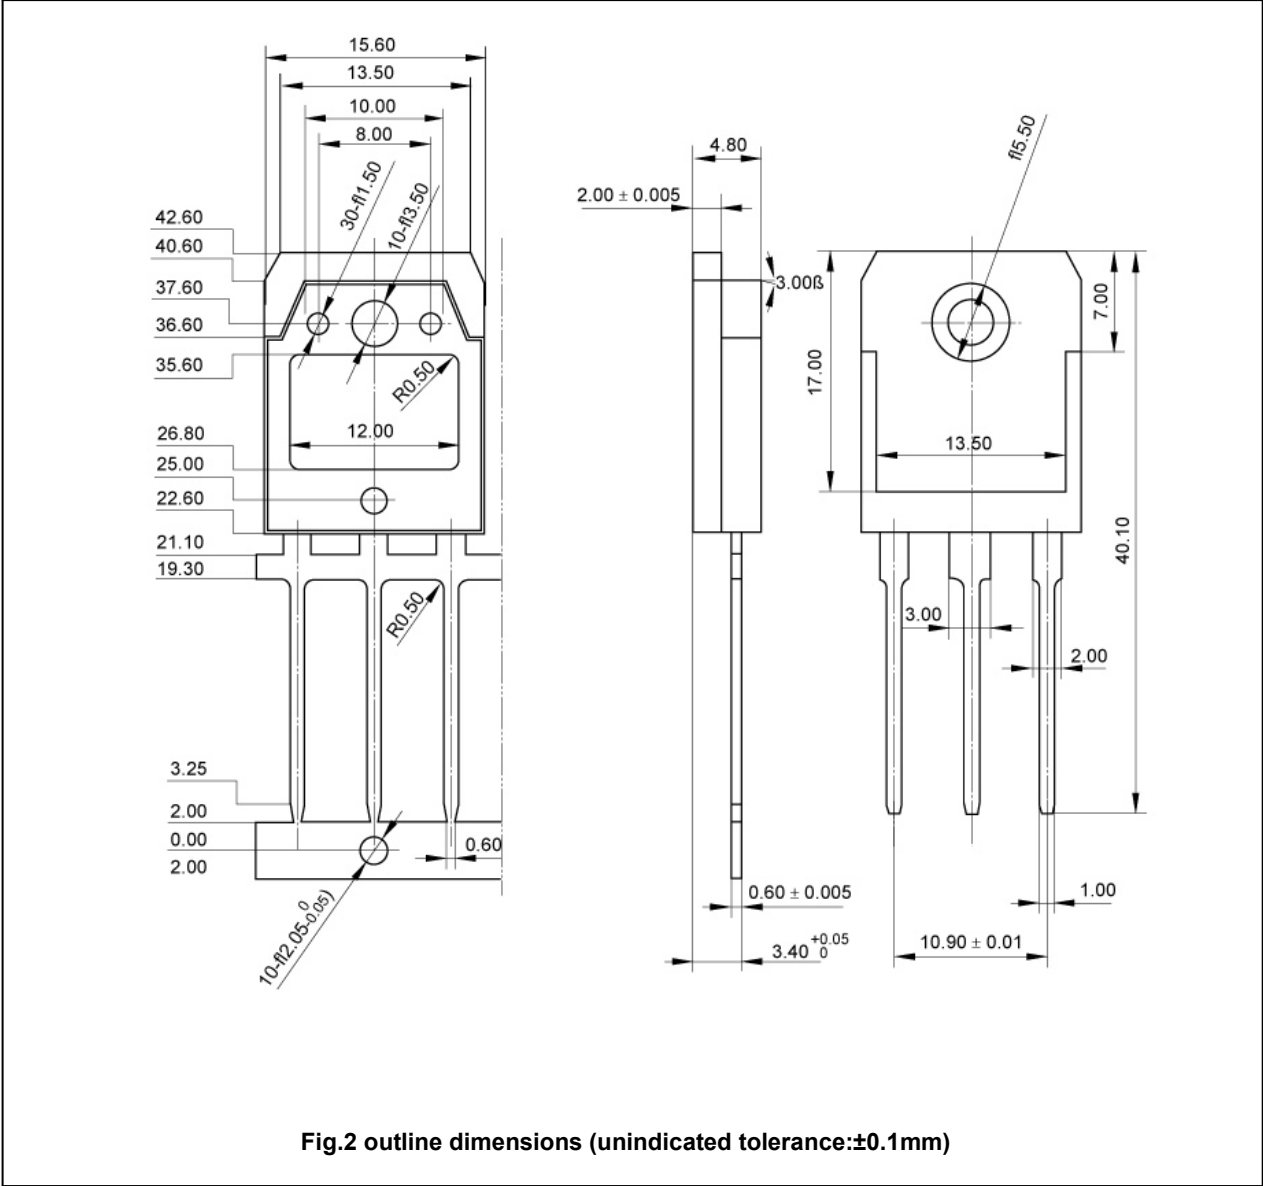

Silicon NPN Power Transistors

2SC3284

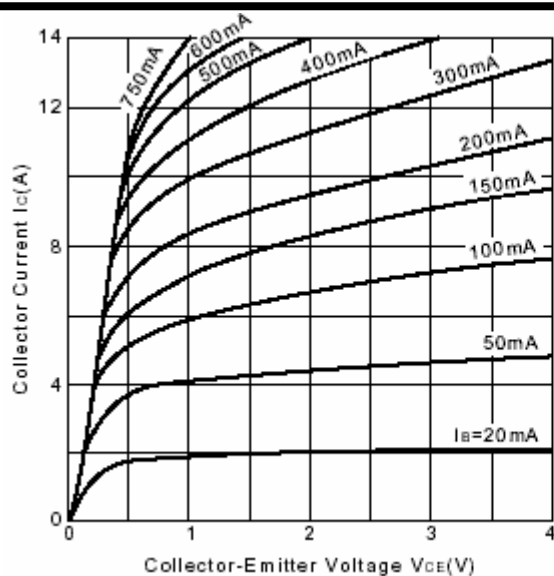


Fig.3 Static Characteristic

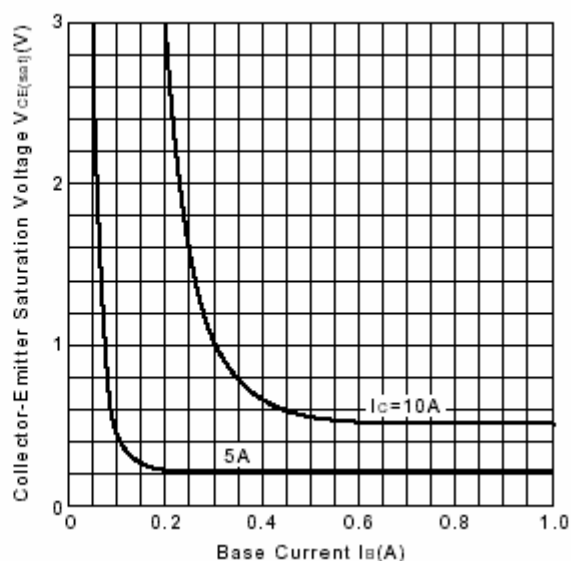
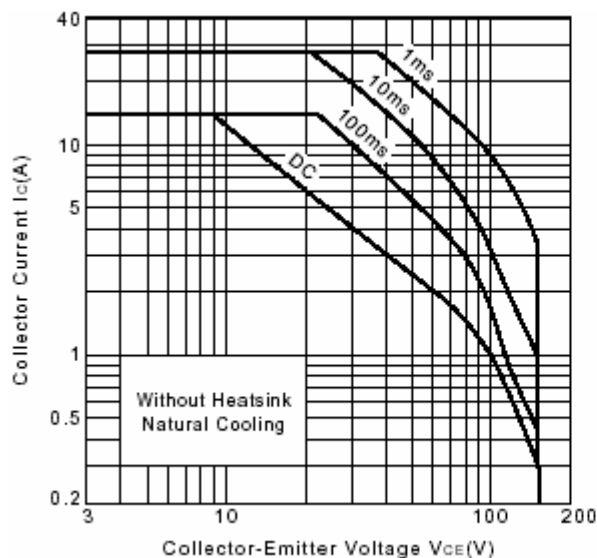
Fig.4 $V_{CE(sat)}-I_B$ 

Fig.5 Safe Operating Area

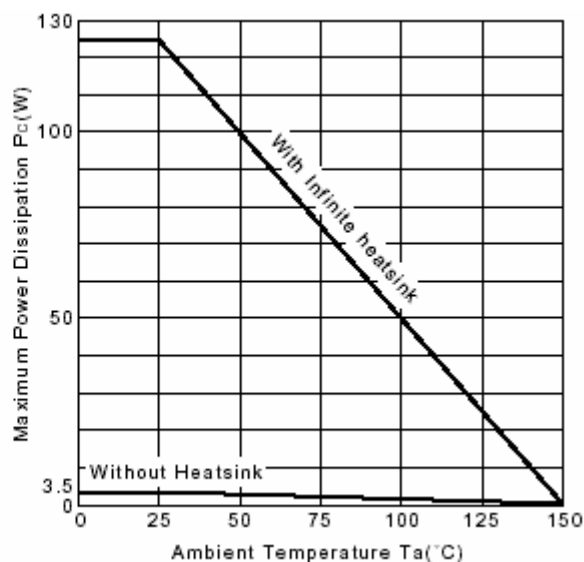


Fig.6 Power Derating

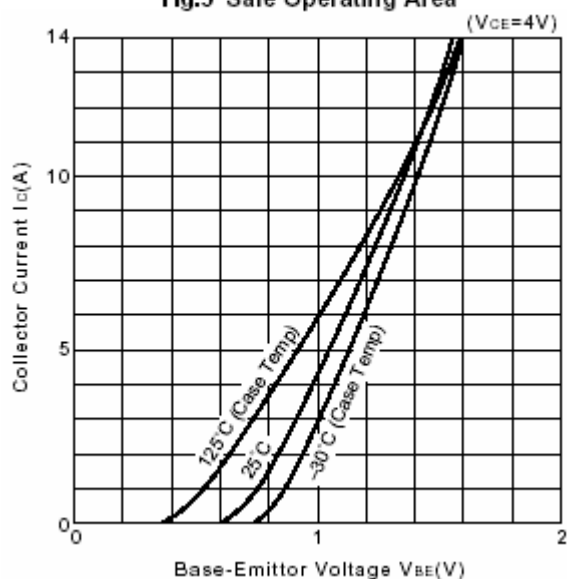
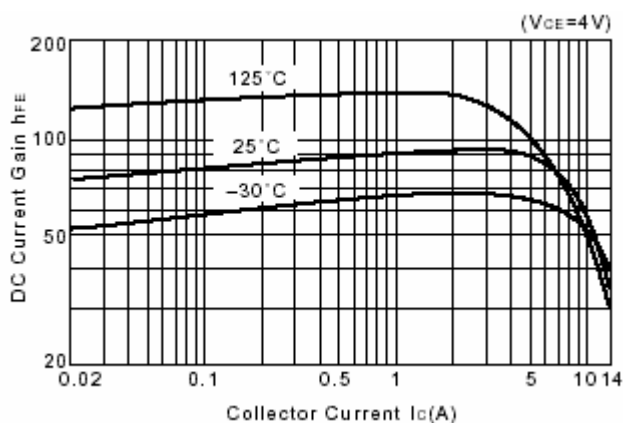
Fig.7 I_C-V_{BE} 

Fig.8 DC current Gain