

Voltage Reference Overview

Shunt and Series References for Any Application




Shunt V_{REF}

With more than 40 years of supply history, Texas Instruments is the premier volume supplier of voltage references. TI's broad portfolio features low temperature coefficient, precise initial accuracy, low noise, and excellent long term stability performance. Series and shunt references support a wide variety of applications, including high-precision references for data converters up to 20-bit precision accuracy and low-noise references for sensor conditioning. Voltage references are also commonly used as voltage monitors, current limiters, and programmable current sources.

Voltage Reference Selection Guide

Voltage Reference Selection Guide							Output Voltage											Temp Range	Package Option
Temp Drift ppm/°C	Initial Accuracy						Part Number	Adjustable	1.2	2.0	2.5	3.0	3.3	4.0	5.0	8.2	10		
10	0.05						LM4030 A				•			•				0 up to 85	3SOT-23, 5SOT-23
20	0.05	0.1					LM4030 A/B				•			•				Q	
30			0.15				LM4030 C				•			•				Q	
20					1.0	2.0	LM2/385/B*		•									C/I	TSSOP, SOP, SDIC-8, TO-92
30					1.0	2.0	LM1/2/385 BX*	Up to 5.3V	•		•							I/C/M	
50					1.0	2.0	LM1/2/385 BY*	Up to 5.3V	•		•							I/C/M	
30/50			0.2				REF1112		•									C/I	3SOT-23
50		0.1	0.2	0.5			LM4050/1 A/B/C		•	•	•			•	•	•	•	I/Q	
50		0.1	0.2	0.5			TL4050/1 A/B/C	Up to 10V	•		•			•	•		•	I/Q	
50				0.4	1.0	2.2	LM431 C/B/A	Up to 36V			•							I/Q	3SOT-23
50				0.5	1.0	2.0	TL431 A/B	Up to 36V			•							C/I	
100		0.1	0.2				LM4040 A/B*			•	•	•		•	•	•	•	I	3SOT-23, SC-70, TO-92
100				0.5			LM4040 C*			•	•	•		•	•	•	•	I/Q	
100		0.1	0.2				LM4041 A/B	Up to 15V	•									I	
100				0.5			LM4041 C*	Up to 15V	•									I/Q	3/5SOT-23
129				0.5			LMV431B	Up to 30V	•									I/C	
129					1.0		LMV431A	Up to 30V	•									I/C	
129						1.5	LMV431	Up to 30V	•									I/C	
150					1.0	2.0	LM1/2/385 B*	Up to 5.3V	•		•							I/C/M	3/5SOT-23, TO-92
150					1.0	2.0	LM4040 D/E*			•	•	•		•	•	•	•	I/Q	
150					1.0	2.0	LM4041 D/E*	Up to 15V	•									I/Q	
150				0.5			TLV431B	Up to 6V	•									I/C/Q	
150					1.0		TLV431A	Up to 6V	•									I/C/Q	
150						1.5	TLV431	Up to 6V	•									I/C/Q	

V_{REF} Orderable Part Number Decoder

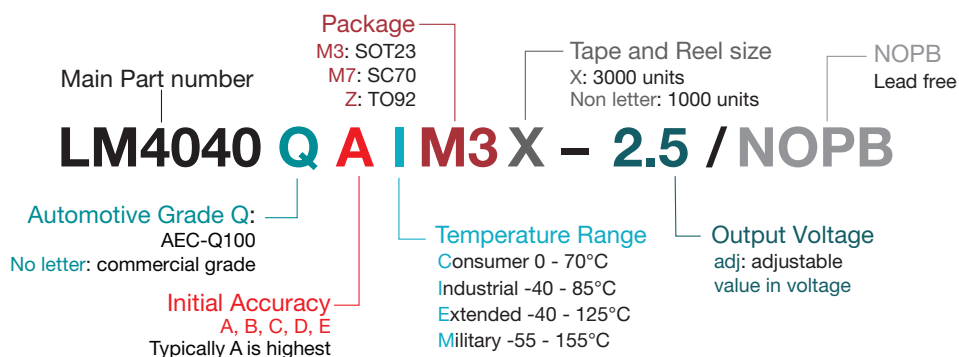

Series V_{REF}

Voltage Reference Selection Guide

Voltage Reference Selection Guide								Output Voltage												Temp Range	Package Options	
Temp Drift ppm/°C	Initial Accuracy							Part Number	Adjustable	1.0	1.2	1.8	2.0	2.5	3.0	3.3	4.1	4.5	5.0			10
3	0.05							REF50xx					•	•	•		•	•	•	•	Q	MSOP-8
3		0.1						LM4140A		•	•		•	•			•				C	
6		0.1						LM4140B		•	•		•	•			•				C	
7			0.2					REF32xx			•		•	•	•	•	•				Q/M	SC23-6
8		0.1						REF50xx					•	•	•		•	•	•	•	Q	MSOP-8
10		0.1						LM4140C		•	•		•	•			•				C	SOIC-8
10	0.05							LM4132A				•	•	•	•	•	•				I/Q	5SOT-23
15			0.2					REF31xx			•		•	•	•	•	•				C	SC23-6
20			0.2					REF32xx			•		•	•	•	•	•				Q	SC23-6
20		0.1	0.2	0.4				LM4132B/C/D				•	•	•	•	•	•				I/Q	5SOT-23
30					0.5			LM4132E				•	•	•	•	•	•				I/Q	
30		0.15						REF33xx			•	•	•	•	•	•					Q	
50			0.2					LM4120/1/5A	•			•	•	•	•	•	•		•		I	5SOT-23
50					0.5			LM4120/1/5	•			•	•	•	•	•	•		•		I	
50			0.2					REF30xx			•		•	•	•	•	•				C	
75			0.2					REF30xx			•		•	•	•	•	•				Q	3SOT-23
75		0.1	0.2					LM4128A/B				•	•	•	•	•	•				Q	
100					0.5	1.0		LM4128C/D				•	•	•	•	•	•				Q	
100							2.0	REF29xx			•		•	•	•	•	•				Q	3SOT-23

* See ti.com for additional versions of this part.

** Additional package options available.


Temperature Ranges

Consumer: 0 – 70°C | Industrial: -40 – 85°C | Q or Extended: -40 – 125°C | Military: -55 – 125°C

AECQ Grades

Q1 -40 – 125°C | Q3 -40 – 85°C | Q4 0 – 70°C

V_{REF} Orderable Part Number Decoder

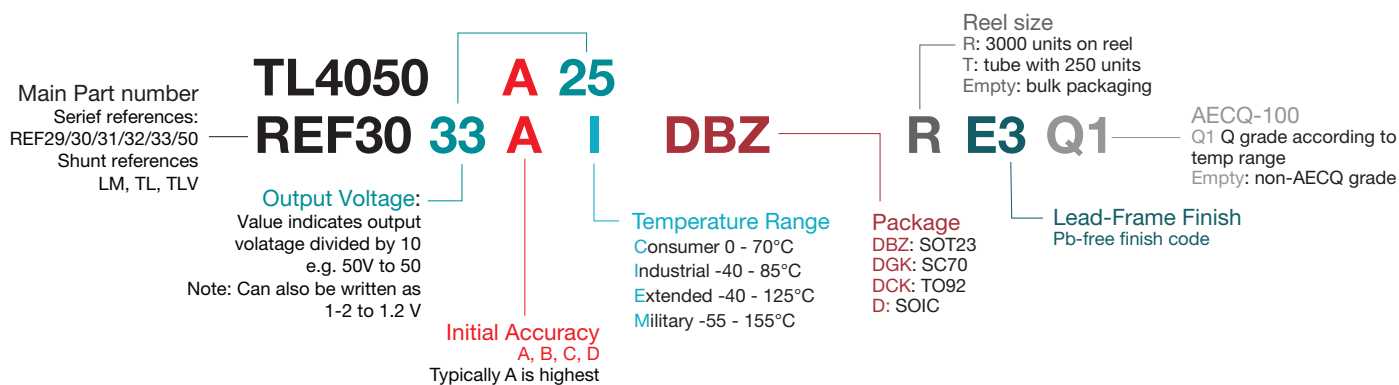


NOTES: Not all positions in the part number have to be filled. Always check the datasheet for precise product identification and specifications.

Voltage Reference Overview


Typical Application Diagrams

Feedback Loop in Isolated AC/DC Power Supply

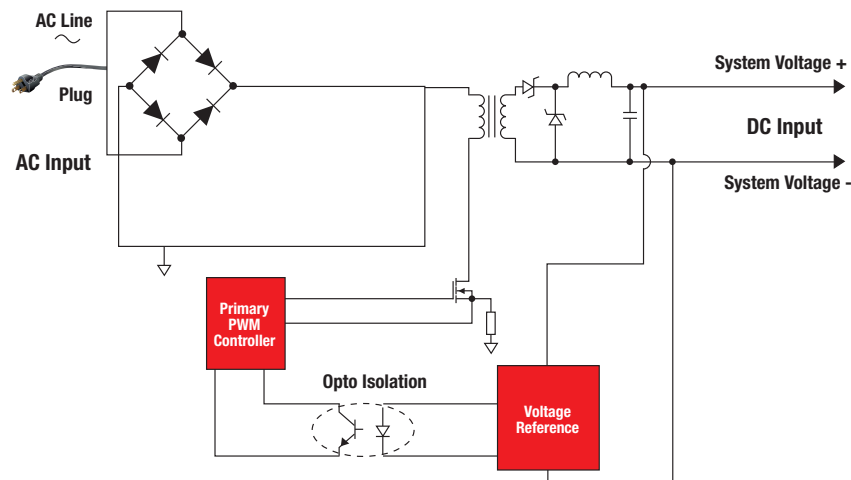

Shunt V_{REF} provides feedback to primary PWM controller to improve efficiency

Portable Medical System

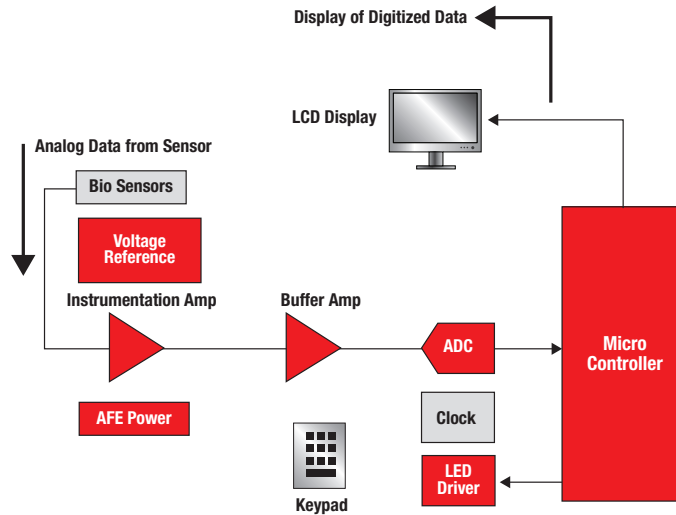

Series V_{REF} provides continuous calibration for ADC to ensure accurate data conversion from sensor

Design Resources and Reference

See TI's complete voltage reference portfolio and easy selection tool at ti.com/vref



Power Management Forum
ti.com/power_forum

Find answers to your power management questions

The platform bar and E2E are trademarks of Texas Instruments.
All other trademarks are the property of their respective owners.

© 2013 Texas Instruments Incorporated
Printed in U.S.A. by Almaden Press, San Jose, CA



SLPT030

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com