


DC/DC Converter

WRE_P- 3WR2 & WRF_P- 3WR2 Series

MORNSUN®

3W,wide input isolated & regulated
DC-DC converter

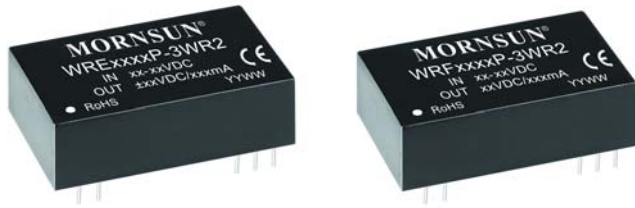

Patent Protection **CE** RoHS

FEATURES

- Wide range of input voltage (2:1)
- DIP package
- Efficiency up to 86%
- 3KVDC isolation
- Short circuit protection(automatic recovery)
- Operating temperature range:-40°C ~ +85°C
- Meet EN60950

The WRE_P-3WR2 & WRF_P-3WR2 Series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board. For these DC-DC converters, you can reduce the failure points of design, and save the manpower, material and time cost in developing micro power supply, and also ensure better quality, stability, safety protection, and reliability for the end products.

These products apply to where:

- 1) Where the voltage variation range of the input power supply $\leq 2:1$;
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 3KVDC$);
- 3) Where high requirements for the output voltage stability and output ripple noise are applied;
In circuits such as industrial control, electric power, communication system power supply, etc.

Selection Guide

Part No.	Input Voltage (VDC)		Output		Efficiency (%Typ.) @ Full Load	Max. Capacitive Load ² (μF)	certification
	Nominal (Range)	Max. ^①	Output Voltage (VDC)	Output Current (mA) (Max./Min.)			
WRE0505P-3WR2	5 (4.5-9)	11	± 5	$\pm 300/\pm 15$	76	2200	—
WRE0512P-3WR2			± 12	$\pm 125/\pm 6$	78	1800	
WRE0515P-3WR2			± 15	$\pm 100/\pm 5$	78	1000	
WRF0505P-3WR2			5	600/30	74	4700	
WRF0512P-3WR2			12	250/12	77	2700	
WRF0515P-3WR2			15	200/10	77	2200	
WRE1205P-3WR2	12 (9-18)	20	± 5	$\pm 300/\pm 15$	81	2200	
WRE1209P-3WR2			± 9	$\pm 166/\pm 8$	84	2000	
WRE1212P-3WR2			± 12	$\pm 125/\pm 6$	84	1800	
WRE1215P-3WR2			± 15	$\pm 100/\pm 5$	85	1000	
WRF1203P-3WR2			3.3	909/46	74	4700	
WRF1205P-3WR2			5	600/30	81	4700	
WRF1212P-3WR2			12	250/12	83	2700	
WRF1215P-3WR2			15	200/10	82	2200	
WRF1224P-3WR2			24	125/6	83	1800	
WRE2405P-3WR2	24 (18-36)	40	± 5	$\pm 300/\pm 15$	82	2200	CE
WRE2412P-3WR2			± 12	$\pm 125/\pm 6$	84	1800	
WRE2415P-3WR2			± 15	$\pm 100/\pm 5$	84	1000	
WRF2403P-3WR2			3.3	909/46	78	4700	
WRF2405P-3WR2			5	600/30	81	4700	
WRF2412P-3WR2			12	250/12	86	2700	
WRF2415P-3WR2			15	200/10	86	2200	
WRF2424P-3WR2			24	125/6	85	1800	
WRE4803P-3WR2	48 (36-75)	80	± 3.3	$\pm 909/\pm 46$	76	4700	—
WRE4805P-3WR2			± 5	$\pm 300/\pm 15$	82	2200	
WRE4812P-3WR2			± 12	$\pm 125/\pm 6$	84	1800	

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.

2014.03.26-A/4

Page 1 of 6

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

DC/DC Converter

WRE_P- 3WR2 & WRF_P- 3WR2 Series

MORNSUN®

WRE4815P-3WR2	48 (36-75)	80	±15	±100/±5	85	1000	—
WRF4805P-3WR2			5	600/30	82	4700	
WRF4812P-3WR2			12	250/12	86	2700	
WRF4815P-3WR2			15	200/10	86	2200	

Note:

- ①. Absolute maximum rating without damage on the converter, but it isn't recommended;
 ②. For dual output converter, the given value is the same for each output.

Input Specifications

Input Specifications						
Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Current (full load/no-load)	5VDC input	—	811/40	—	mA	
	12VDC input		309/30			
	24VDC input		155/15			
	48VDC input		77/5			
Reflected Ripple Current	5VDC input	—	20	—		VDC
	12VDC input		30			
	24VDC input		30			
	48VDC input		30			
Input impulse Voltage (1sec. max.)	5VDC input	-0.7	--	12	VDC	
	12VDC input		--	25		
	24VDC input		--	50		
	48VDC input		--	100		
Starting Voltage	5VDC input	--	--	4.5		VDC
	12VDC input	--	--	9		
	24VDC input	--	--	18		
	48VDC input	--	--	36		
Input Filter		Pi filter				

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		—	±1	±3	%
No load output Voltage Accuracy	Input voltage range	—	±1.5	±5	
Balance of Output Voltage	Dual output, balanced load	—	±0.5	±1	
Linear Regulation	Full load, the input voltage is from low voltage to high voltage	—	±0.2	±0.5	
Load Regulation	5%-100% load	—	±0.2	±0.5	
Transient Recovery Time	25% load step change	—	0.5	2	ms
Transient Response Deviation		—	±2	±5	%
Temperature Coefficient	Full load	—	±0.02	±0.03	%/°C
Ripple&Noise*	20MHz bandwidth	—	50	80	mV p-p
Short circuit Protection	Input voltage range	Continuous, self-recovery			

Note: * Ripple and noise are measured by "parallel cable" method, please see DC-DC Converter Application Notes for specific operation.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA	3000	—	—	VDC
Insulation Resistance	Input-output, isolation voltage 500VDC	1000	—	—	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V	—	30	50	pF
Operating Temperature	Derating if the temperature is ≥85°C (see Fig. 1)	-40	—	85	°C
Storage Temperature		-55	—	125	
Casing Temperature Rise	Ta=25°C	—	25	—	

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.

2014.03.26-A/4

Page 2 of 6

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Hand Soldering	Welding spot is 1.5mm away from the casing, 10 seconds	--	--	300	°C
Storage Humidity	Non-condensing	5	--	95	%
Switching Frequency(PFM mode)	100% load, nominal input voltage	--	200	--	KHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K hours

Physical Specifications

Casing Material	Plastic(UL94-V0)
Dimensions	31.60*20.30*10.20 mm
Weight	14g(Typ.)
Cooling	Free convection

EMC Specifications

EMI	Conducted emission	CISPR22/EN55022	CLASS B (see Fig.3-② for recommended circuit)
	Radiated emission	CISPR22/EN55022	CLASS B (see Fig.3-② for recommended circuit)
EMS	Electrostatic discharge	IEC/EN61000-4-2	Contact $\pm 4\text{KV}$ / Air $\pm 8\text{KV}$ perf. Criteria B
	Radiation immunity	IEC/EN61000-4-3	10V/m perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$ (see Fig.3-① for recommended circuit) perf. Criteria B
	Surge Immunity	IEC/EN61000-4-5	$\pm 2\text{KV}$ (see Fig.3-① for recommended circuit) perf. Criteria B
	Conducted disturbance immunity	IEC/EN61000-4-6	3 Vr.m.s perf. Criteria A
	Immunities of voltage dip, drop and short interruption	IEC/EN61000-4-29	0-70% perf. Criteria B

Product Characteristic Curve





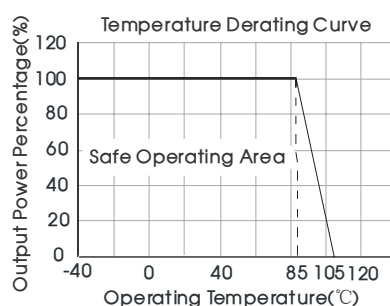


Fig. 1

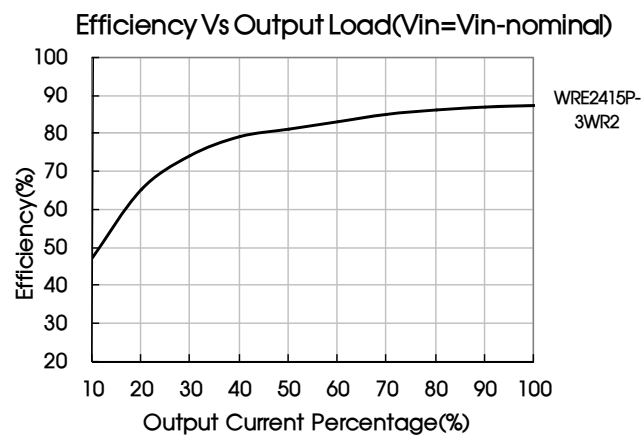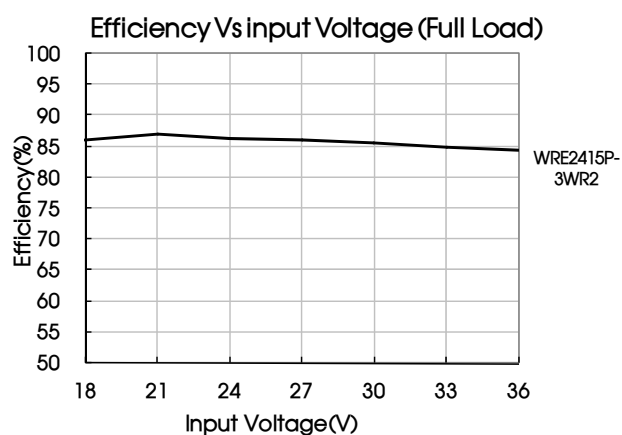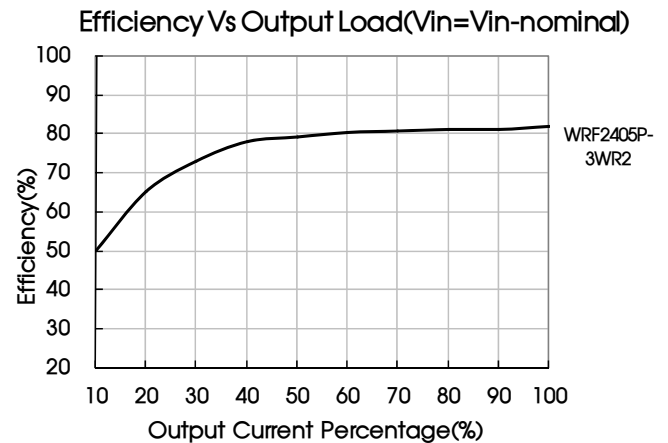

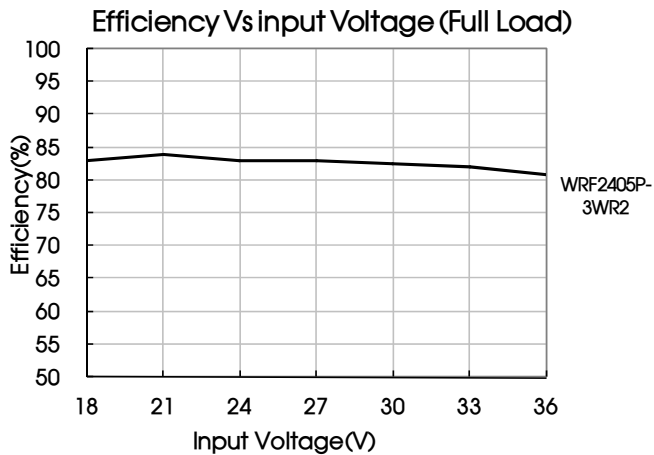

Design Reference


1. Output load requirements

To ensure that the module can work efficiently and reliably, its output min. load shall be no lower than 5% of the rated load when using, or the output ripple may increase rapidly. Ensure that the product working load must be higher than 5% of the rated load.

2. Typical application


All the DC/DC converters of this series are tested according to the recommended circuit (see Fig. 2) before delivery.

If it is required to further reduce input and output ripple, properly increase the input & output of additional capacitors Cin and Cout or select capacitors of low equivalent impedance provided that the capacitance is no larger than the max. capacitive load of the product.

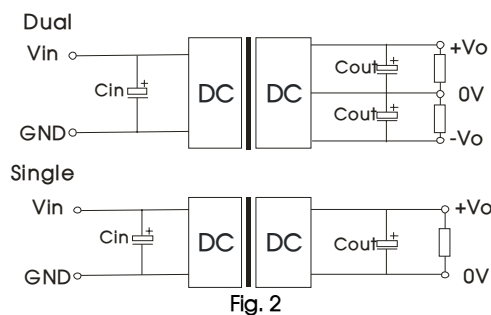

Vin	5V&12V	24V&48V
Cin	100μF	10μF~47μF
Cout	10μF	

3. EMC solution-recommended circuit

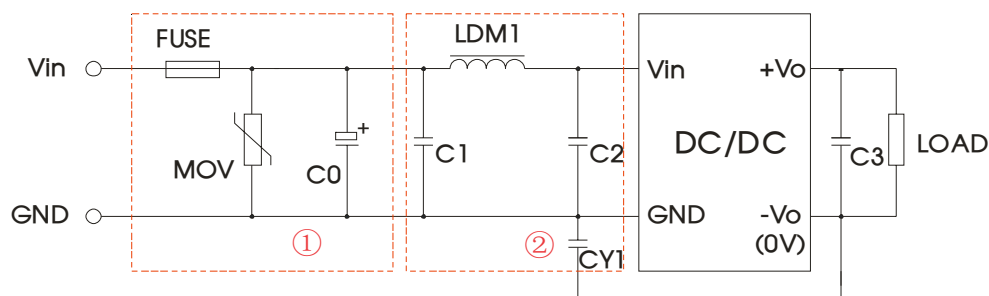

Parameter description:

Model	Vin:5V	Vin:12V	Vin:24V	Vin:48V
FUSE	Slow blown fuses according to the actual input current selections of the clients			
MOV	--	S14K25	S14K35	S14K60
C0	1000 μ F	1000 μ F	330 μ F/50V	330 μ F/100V
C1	4.7 μ F/50V			4.7 μ F/100V
LDM1	12 μ H			
C2	4.7 μ F/50V			4.7 μ F /100V
C3	10 μ F			
CY1	1nF/3KV			

Note: ①.Part ① in the Fig. 3 is used for EMS test and part ② for EMI filtering; selected based on needs.

②.If there is no recommended parameters, the model no require the external component.

EMC solution-recommended circuit PCB layout

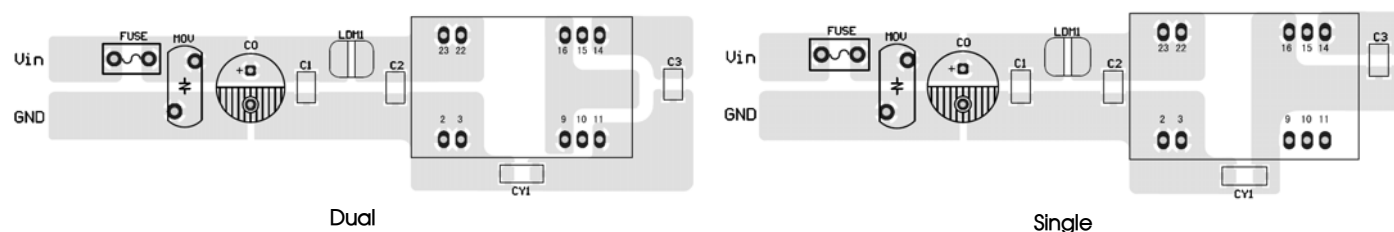


Fig. 4

Note: Note: the min. distance of the bonding pads between input grounding and output grounding shall be $\geq 2\text{mm}$.

4. Input current

When the electricity is provided by the unstable power supply, please make sure that the range of the output voltage fluctuation and the ripple voltage of the power supply do not exceed the indicators of the modules. Input current of power supply should afford the flash startup current of this kind of DC/DC module(see Fig. 5).

Generally: Vin=5V Iave =1400mA
 Vin=12V Iave=620mA
 Vin=24V Iave=310mA
 Vin=48V Iave =150mA





Fig. 5

5. For more information please find DC-DC converter application notes on www.mornsun-power.com

Dimensions and Recommended Layout

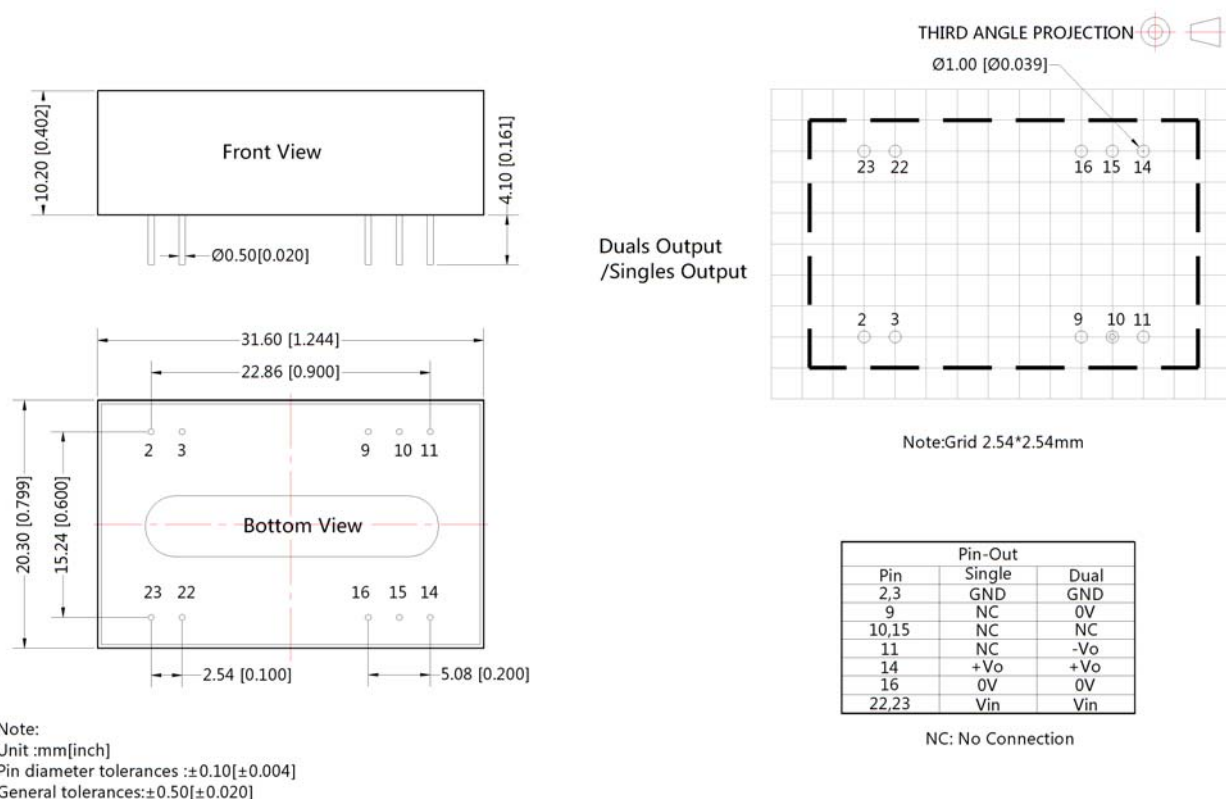

Note:

1. Packing Information please refer to 'Product Packing Information'. Packing bag number: 58210008;
2. The min. load shall be no lower than 5%, or the output ripple may increase rapidly; If the product is operated under the min. required load, the product performance cannot be guaranteed to comply with all performance indexes in the Manual, but the reliability of the product will not be influenced;
3. The unbalance degree of the recommended dual output module load: $\leq 5\%$; If the degree exceeds $\pm 5\%$, then the product performances cannot be guaranteed to comply with all the performance indicators in the manual, and please directly contact our technicians for specific information;
4. The max. capacitive load should be tested within the input voltage range and under full load conditions;
5. Unless otherwise specified, data in this datasheet should be tested under the conditions of $T_a=25^\circ\text{C}$, humidity<75% when inputting nominal voltage and outputting rated load;
6. All index testing methods in this datasheet are based on our Company's corporate standards;
7. The performance indexes of the product models listed in this datasheet are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technicians for specific information;
8. We can provide product customization service;
9. Specifications of this product are subject to changes without prior notice.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn