Ordering number: EN 2970

SANYO

No.2970

2SC4272

NPN Epitaxial Planar Silicon Transistor

27MHz CB Transceiver Driver Applications

Features

- Small size making it easy to provide high-density, small-sized hybrid ICs.

Absolute Maximum Ratings at Ta = 25°C

				unit
Collector to Base Voltage	V_{CBO}		75	V
Collector to Emitter Voltage	V_{CER}	R_{BE} = 150Ω	75	V
Collector to Emitter Voltage	V_{CEO}		45	V
Emitter to Base Voltage	V_{EBO}		5	V
Collector Current	I_C		1.0	A
Collector Current(Pulse)	I_{CP}		1.5	A
Collector Dissipation	P_C	Mounted on ceramic board(250mm² × 0.8mm)	1.3	W
Junction Temperature	Tj		150	°C
Storage Temperature	Tstg		−55 to +150	°C

Electrical Characteristics at Ta = 25°C

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	V_{CB} = 40V, I_E = 0			1.0	μA
Emitter Cutoff Current	I_{EBO}	V_{EB} = 4V, I_C = 0			1.0	μA
DC Current Gain	h_{FE}※	V_{CE} = 5V, I_C = 500mA	60※		320※	
Gain-Bandwidth Product	f_T	V_{CE} = 10V, I_C = 50mA	180	250		MHz
Output Capacitance	c_{ob}	V_{CB} = 10V, f = 1MHz		15		pF
Output Power	Po	V_{CC} = 12V, f = 27MHz Pin = 35mW	1.0	1.8		W
Collector Efficiency	η_c	See specified Test Circuit.	60			%
C-E Saturation Voltage	$V_{CE(sat)}$	I_C = 500mA, I_B = 50mA		0.2	0.6	V
B-E Saturation Voltage	$V_{BE(sat)}$	I_C = 500mA, I_B = 50mA		0.9	1.2	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	I_C = 10μA, I_E = 0	75			V
C-E Breakdown Voltage	$V_{(BR)CER}$	I_C = 1mA, R_{BE} = 150Ω	75			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	I_C = 1mA, R_{BE} = ∞	45			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	I_E = 10μA, I_C = 0	5			V

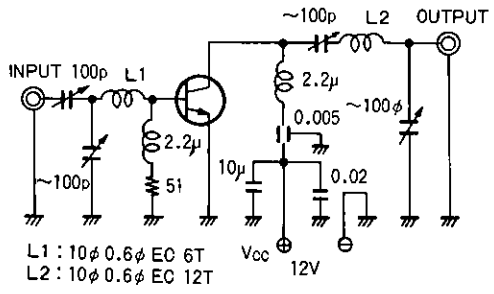
※ : The 2SC4272 is classified by 500mA h_{FE} as follows :

60 D 120	100 E 200	160 F 320

Marking : CH

h_{FE} rank : D,E,F

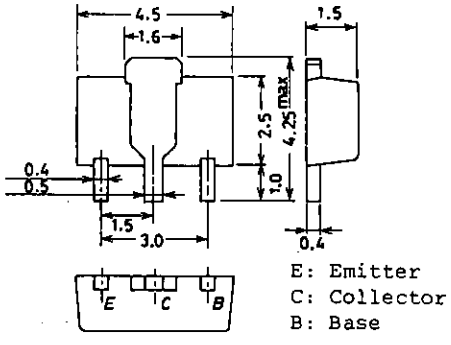
Collector Efficiency Test Circuit



Unit (Resistance : Ω, Capacitance : F)

Package Dimensions 2038

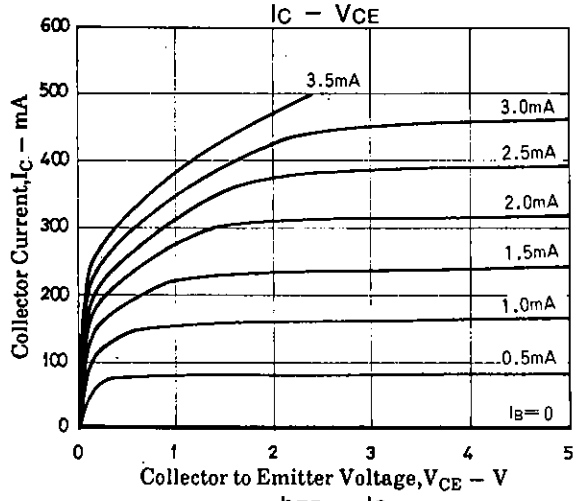
(unit : mm)

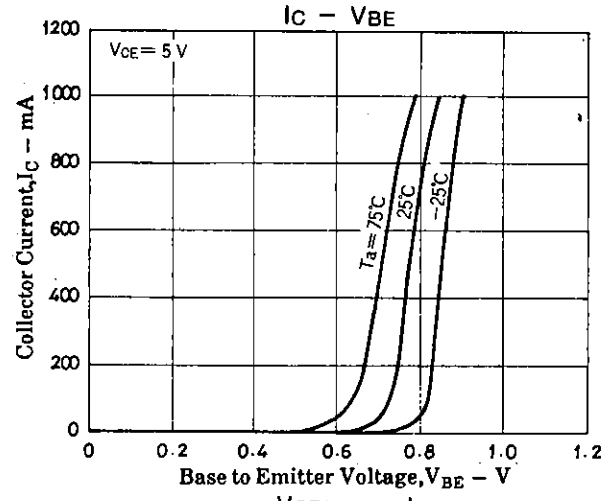


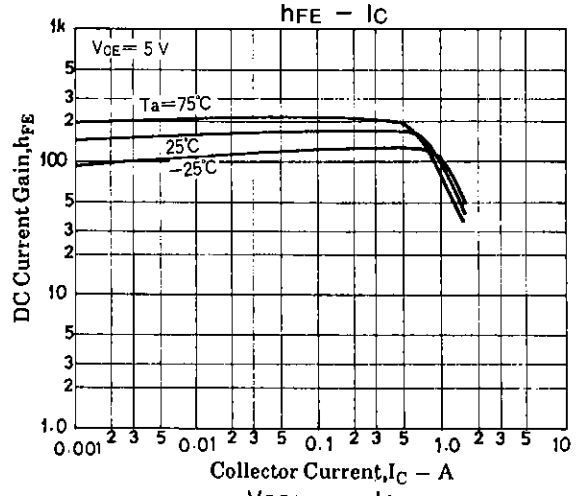
E: Emitter
C: Collector
B: Base

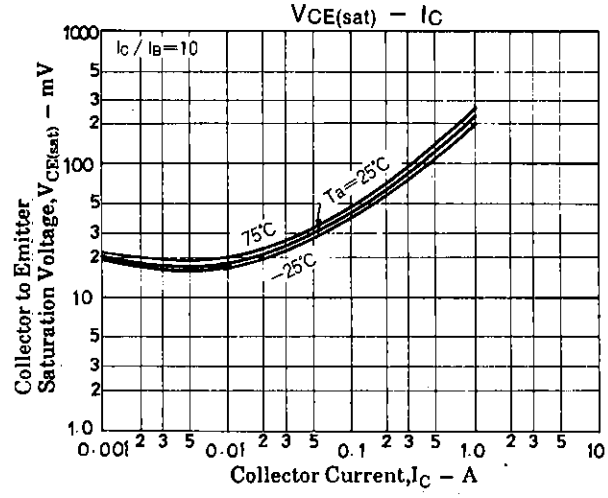
SANYO: PCP

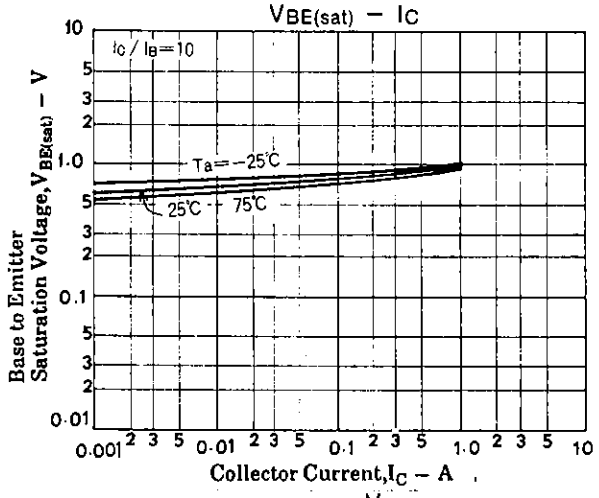
(Bottom View)

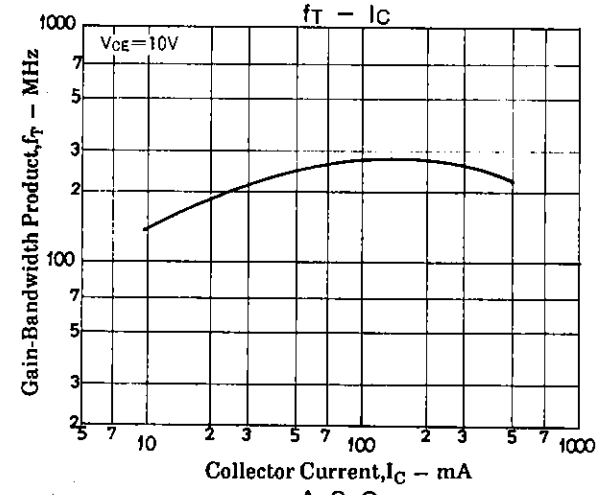

IC – VCE
3.5mA
3.0mA
2.5mA
2.0mA
1.5mA
1.0mA
0.5mA
IB=0
Collector Current,IC – mA
Collector to Emitter Voltage,VCE – V

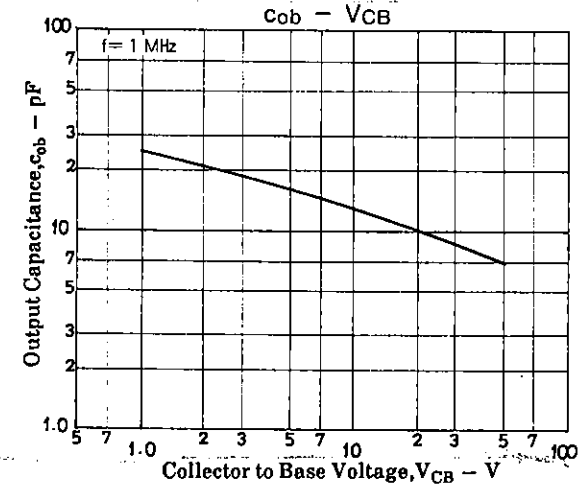

IC – VBE
VCE= 5 V
Ta=75°C
25°C
–25°C
Collector Current,IC – mA
Base to Emitter Voltage,VBE – V

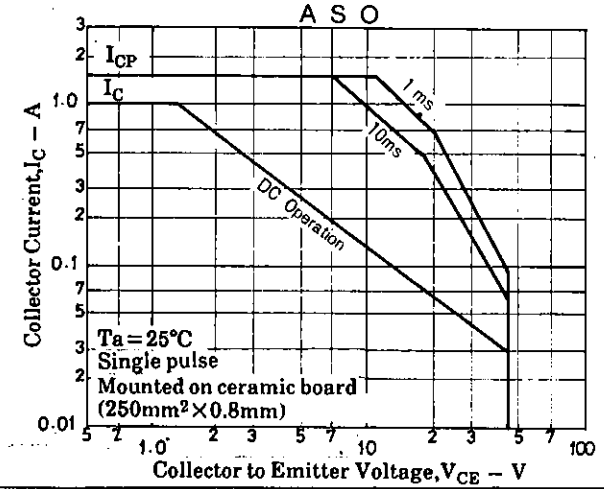

hFE – IC
VCE= 5 V
Ta=75°C
25°C
–25°C
DC Current Gain,hFE
Collector Current,IC – A

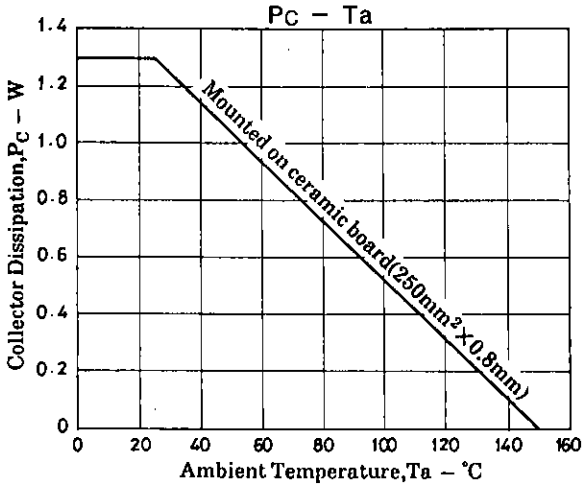

VCE(sat) – IC
IC / IB=10
Ta=25°C
75°C
–25°C
Collector to Emitter Saturation Voltage,VCE(sat) – mV
Collector Current,IC – A


VBE(sat) – IC
IC / IB=10
Ta=–25°C
25°C
75°C
Base to Emitter Saturation Voltage,VBE(sat) – V
Collector Current,IC – A


fT – IC
VCE=10V
Gain-Bandwidth Product,fT – MHz
Collector Current,IC – mA


Cob – VCB
f= 1 MHz
Output Capacitance,Cob – pF
Collector to Base Voltage,VCB – V


A S O
ICP
IC
1ms
10ms
DC Operation
Ta=25°C
Single pulse
Mounted on ceramic board
(250mm²×0.8mm)
Collector Current,IC – A
Collector to Emitter Voltage,VCE – V



■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:
① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.