XB1085 Series

3.0A Positive Voltage Regulator

■GENERAL DESCRIPTION

The XB1085 is a series of low dropout positive voltage regulators with a high output current capacity of 3.0A .
Stable output can be maintained by using 10μF (C_{IN}) and 22μF (C_L) of tantalum capacitors.
The fixed voltage types (XB1085P series) are available in 1.5V, 1.8V, 2.5V, 3.3V, and 5.0V. The voltage adjustable type (XB1085K series) is also available which can set the output voltage with only two external resistors.
With an overcurrent and thermal protection circuit built-in, the IC is disabled for protection when an output current reaches limit current or junction temperature increases up to limit temperature.
The XB1085 series is available in TO-252 package.


■APPLICATIONS

- High efficiency linear regulators
- Battery chargers
- DVD drives
- Set top boxes
- Various battery drive equipment

■FEATURES

Maximum Output Current : More than 3.0A (within Pd)
Maximum Operating Voltage : 12V
Output Voltage : 1.5V, 1.8V, 2.5V, 3.3V, 5.0V, (XB1085P)
Externally Set (XB1085K/ Reference Voltage 1.25V (TYP.))
Output Voltage Accuracy : ±1% (Tj =25℃)
Dropout Voltage : 1.3V @ I_{OUT}=3.0A (TYP.)
Line Regulation : 0.015% (TYP.) <ADJ>
Load Regulation : 0.1% (TYP.) <ADJ>
Reference Voltage Pin Current: Less than 120μA <ADJ>
Overcurrent Protection Circuit Built-In
Thermal Protection Circuit Built-In
Package : TO-252


■TYPICAL APPLICATION CIRCUITS

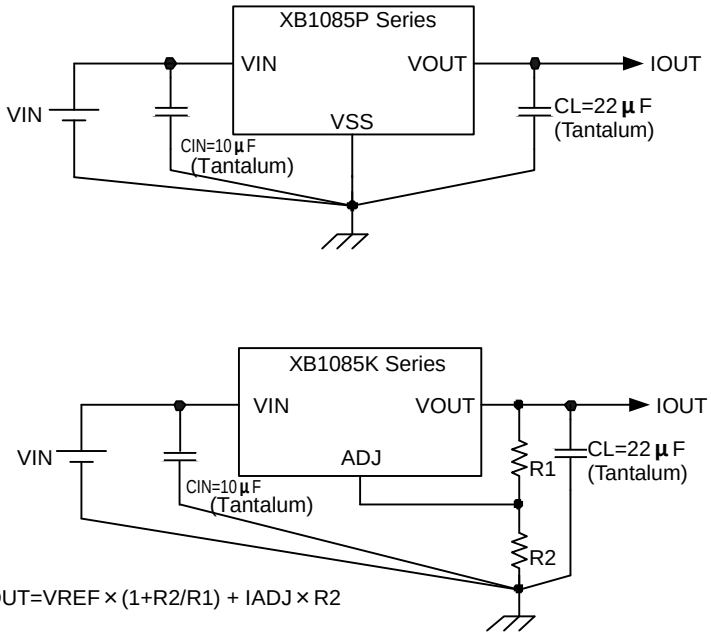


VOUT=VREF×(1+R2/R1) + IADJ×R2

■TYPICAL PERFORMANCE CHARACTERISTICS

●Output Voltage vs. Output Current

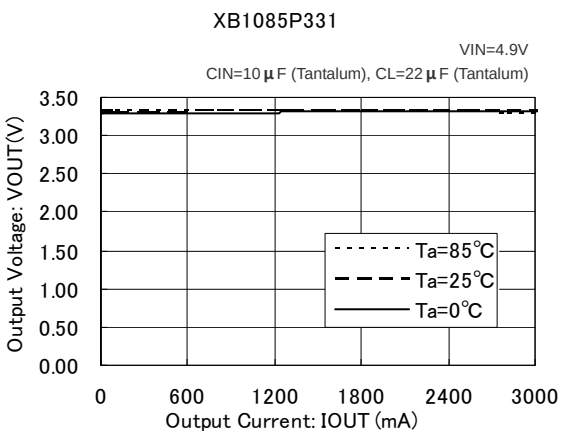

■PIN CONFIGURATION

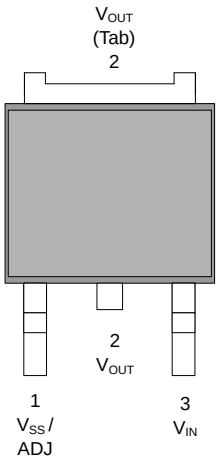

TO-252
(TOP VIEW)

■PIN ASSIGNMENT

PIN NUMBER TO-252	PIN NAME	FUNCITONS
1	VSS / ADJ	Ground / Reference Voltage
2	VOUT	Output
3	VIN	Input


■PRODUCT CLASSIFICATION

●Ordering Information

XB1085①②③④⑤⑥

DESIGNATOR	DESCRIPTION	SYNBOL	DESCRIPTION
①	Type of Regulators	P	: Fixed V_{OUT}
		K	: Adjustable (Externally Set)
②③④	Output Voltage and Output Voltage Accuracy	151	: V_{OUT}=1.5V (±1%)
		181	: V_{OUT}=1.8V (±1%)
		251	: V_{OUT}=2.5V (±1%)
		331	: V_{OUT}=3.3V (±1%)
		501	: V_{OUT}=5.0V (±1%)
		12B	: V_{REF}=1.25V (±1%)
⑤	Package	J	: TO-252
⑥	Device Orientation	R	: Embossed tape, standard feed
		L	: Embossed tape, reverse feed

■BLOCK DIAGRAM

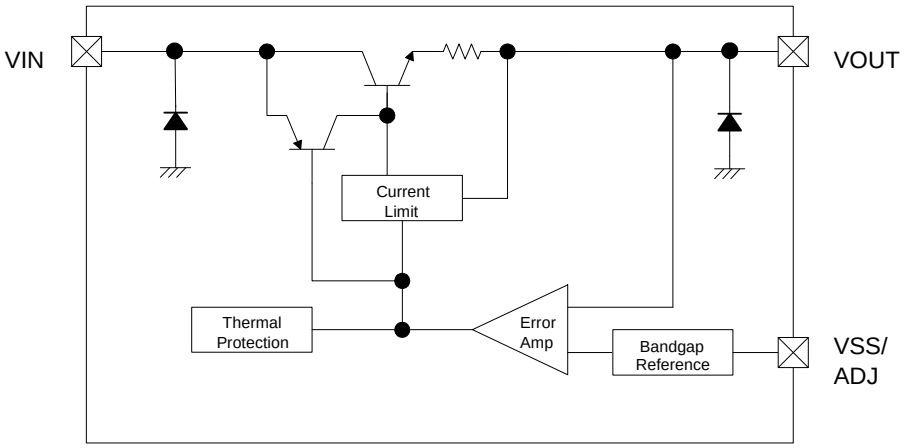

*Diodes inside the circuit are ESD protection diodes.

■ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATINGS	UNIT
Input Voltage		V_{IN}	18	V
Power Dissipation	TO-252	Pd	1300 (*2)	mW
Operating Junction Temperature		Tj	125	℃
Storage Temperature Range		Tstg	- 55 ~ 125	℃

Note:

*1: Stresses greater than those listed above ratings may cause permanent damage to the device.

*2: The rating of the power dissipation is determined when mounted on the PCB.

■ELECTRICAL CHARACTERISTICS

XB1085PxxxJ

Tj= 25℃ unless otherwise specified

PARAMETER	SYMBOL	CONDITIONS		MIN.	TYP.	MAX.	UNIT	CIRCUIT
Output Voltage	V_{OUT} (1.5V)	V_{IN}=4.5V, I_{OUT}=0mA		1.485	1.5	1.515	V	①
			O.T.(*1)	1.47		1.53		
	V_{OUT} (1.8V)	V_{IN}=4.8V, I_{OUT}=0mA		1.782	1.8	1.818	V	①
			O.T.(*1)	1.764		1.836		
	V_{OUT} (2.5V)	V_{IN}=5.5V, I_{OUT}=0mA		2.475	2.5	2.525	V	①
			O.T.(*1)	2.450	-	2.550		
	V_{OUT} (3.3V)	V_{IN}=6.3V, I_{OUT}=0mA		3.267	3.3	3.333	V	①
			O.T.(*1)	3.234	-	3.366		
	V_{OUT} (5.0V)	V_{IN}=8.0V, I_{OUT}=0mA		4.95	5	5.05	V	①
			O.T.(*1)	4.9		5.1		
Line Regulation	ΔV_{OUT1} (1.5V)	3V≦V_{IN}≦10V I_{OUT}=10mA		-	0.5	6	mV	①
			O.T.(*1)		1	6		
	ΔV_{OUT1} (1.8V)	3.3V≦V_{IN}≦10V I_{OUT}=10mA		-	0.5	6	mV	①
			O.T.(*1)		1	6		
	ΔV_{OUT1} (2.5V)	4V≦V_{IN}≦10V I_{OUT}=10mA		-	0.5	6	mV	①
			O.T.(*1)		1	6		
	ΔV_{OUT1} (3.3V)	4.8V≦V_{IN}≦10V I_{OUT}=10mA		-	0.5	6	mV	①
			O.T.(*1)		1	6		
	ΔV_{OUT1} (5.0V)	6.5V≦V_{IN}≦10V I_{OUT}=10mA		-	0.5	10	mV	①
			O.T.(*1)		1	10		
Load Regulation	ΔV_{OUT2} (1.5V)	V_{IN}-V_{OUT}=3.0V 0mA≦I_{OUT}≦3.0A		-	3	15	mV	①
			O.T.(*1)		7	20		
	ΔV_{OUT2} (1.8V)	V_{IN}-V_{OUT}=3.0V 0mA≦I_{OUT}≦3.0A		-	3	15	mV	①
			O.T.(*1)		7	20		
	ΔV_{OUT2} (2.5V)	V_{IN}-V_{OUT}=3.0V 0mA≦I_{OUT}≦3.0A		-	3	15	mV	①
			O.T.(*1)		7	20		
	ΔV_{OUT2} (3.3V)	V_{IN}-V_{OUT}=3.0V 0mA≦I_{OUT}≦3.0A		-	3	15	mV	①
			O.T.(*1)		7	20		
	ΔV_{OUT2} (5.0V)	V_{IN}-V_{OUT}=3.0V 0mA≦I_{OUT}≦3.0A		-	5	20	mV	①
			O.T.(*1)		10	35		
Dropout Voltage	Vdif	ΔV_{OUT}=1%, I_{OUT}=3.0A		-	1.3	1.5	V	①
Limit Current	I_{LIM}	V_{IN}-V_{OUT}=3.0V		3.2	4.5	-	A	①
Supply Current	I_{DD}	V_{IN}=10V	O.T.(*1)	-	5	10	mA	②
Temperature Stability	Ts	V_{IN}-V_{OUT}=1.5V I_{OUT}=10mA	O.T.(*1)	-	0.5	-	%	-

Note:

*1: O.T. denotes the specifications which apply over the operating junction Temperature range (0℃ ≦ Tj ≦125°C).

Please be sure that the power consumption does not exceed the power dissipation rating 1300mW. If the power consumption exceeds the power dissipation rating and the operating junction temperature rises more than the rating 125°C, the IC enters thermal shutdown state.

■ELECTRICAL CHARACTERISTICS (Continued)

XB1085K12BJ

Tj= 25℃ unless otherwise specified

PARAMETER	SYMBOL	CONDITIONS		MIN.	TYP.	MAX.	UNIT	CIRCUIT
Reference Voltage	V_{REF}	V_{IN}-V_{OUT}=3.0V		1.238	1.25	1.262	V	①
		I_{OUT}=10mA	O.T.(*1)	1.225	-	1.275		
Line Regulation	ΔV_{OUT1}	2.85V≦V_{IN}≦10V		-	0.015	0.2	%	①
		I_{OUT}=10mA	O.T.(*1)		0.035	0.2		
Load Regulation	ΔV_{OUT2}	V_{IN}-V_{OUT}=3.0V		-	0.1	0.3	%	①
		0mA≦I_{OUT}≦3.0A	O.T.(*1)		0.2	0.4		
Dropout Voltage	Vdif	ΔV_{OUT}=1%, I_{OUT}=3.0A		-	1.3	1.5	V	①
Limit Current	I_{LIM}	V_{IN}-V_{OUT}=3.0V		3.2	4.5	-	A	①
Temperature Stability	Ts	V_{IN}-V_{OUT}=1.5V I_{OUT}=10mA	O.T.(*1)	-	0.5	-	%	-
Minimum Output Current	I_{OUTmin}	V_{IN}=10V	O.T.(*1)	-	3	10	mA	①
Adjust Voltage Pin Current	I_{ADJ}	V_{IN}=4.25V, I_{OUT}=10mA	O.T.(*1)	-	55	120	μA	①


Note:

*1: O.T. denotes the specifications which apply over the operating junction Temperature range (0℃ ≦ Tj ≦125°C).
Please be sure that the power consumption does not exceed the power dissipation rating, 1300mW. If the power consumption exceeds the power dissipation rating and the operating junction temperature rises more than the rating, 125°C, the IC enters thermal shutdown state.

■TEST CIRCUITS


●XB1085PxxxJ

Circuit ①

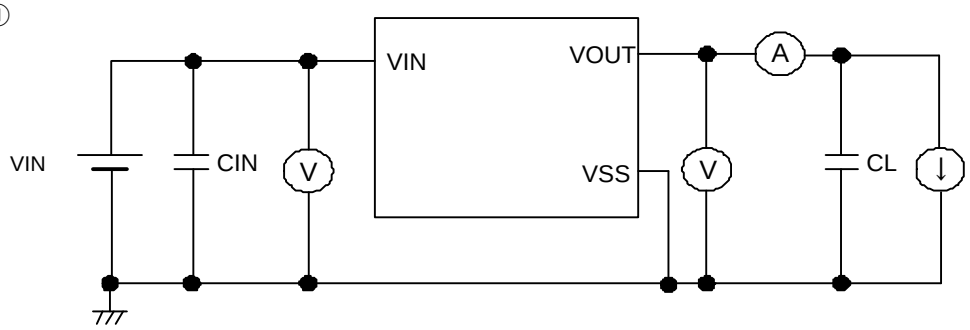


* CIN=10μF (Tantalum), CL=22μF (Tantalum)

Circuit ②

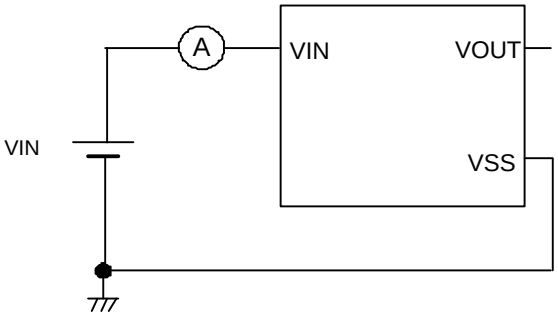

●XB1085K12BJ

Circuit ①

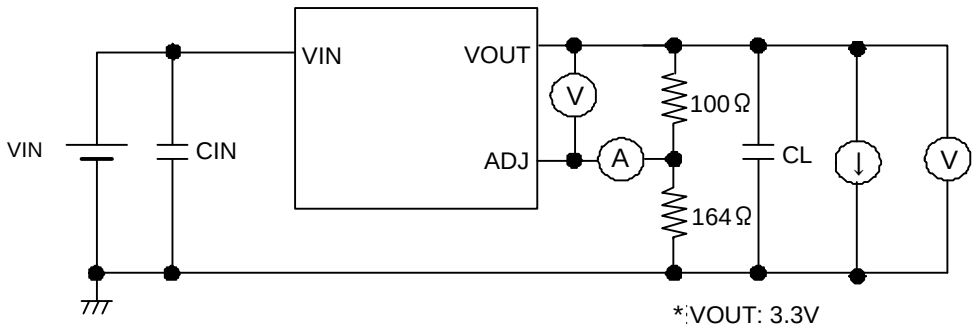


*VOUT: 3.3V


* CIN=10μF (Tantalum), CL=22μF (Tantalum)

■TYPICAL PERFORMANCE CHARACTERISTICS


(1) Output Voltage vs. Output Current

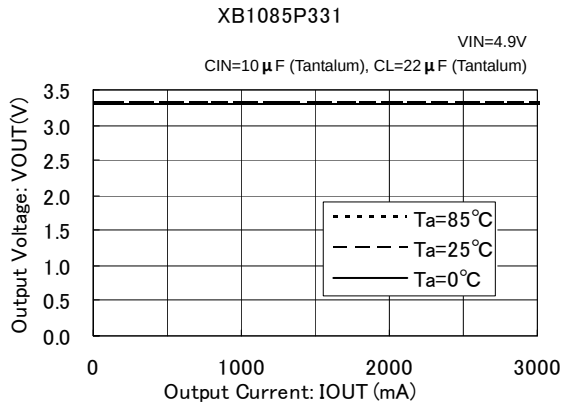


(2) Output Voltage vs. Input Voltage

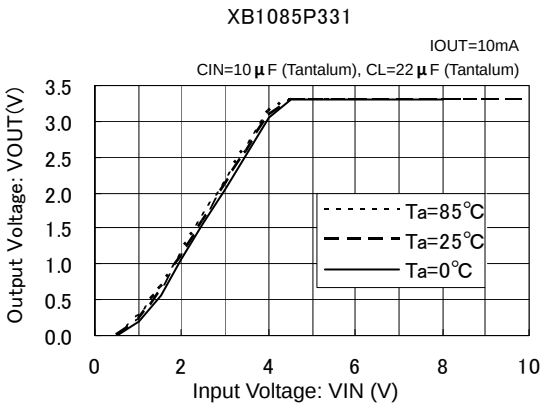


(3) Dropout Voltage vs. Output Current

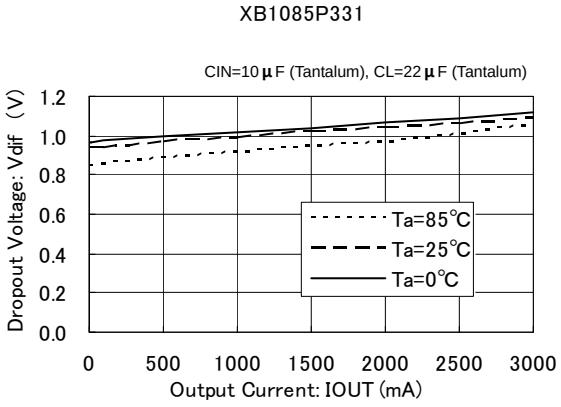


(4) Supply Current vs. Input Voltage

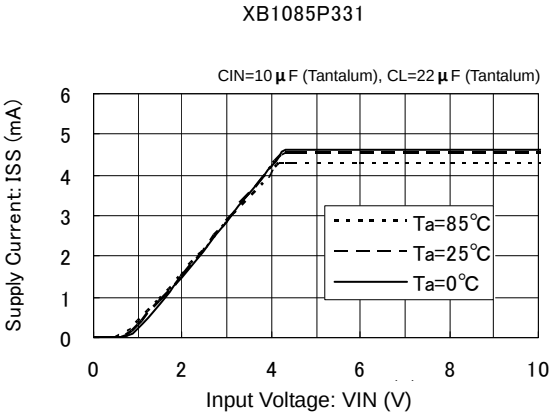

(5) Reference Voltage vs. Ambient Temperature

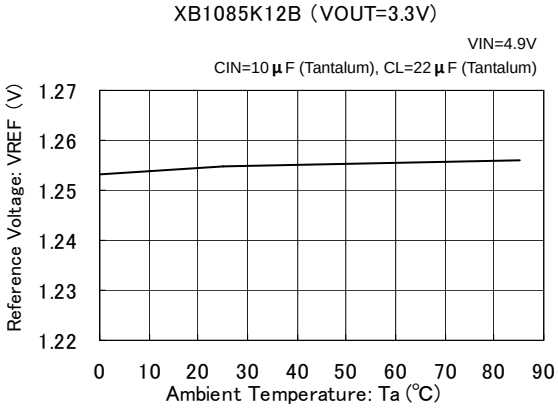


(6) Adjust Pin Current vs. Ambient Temperature

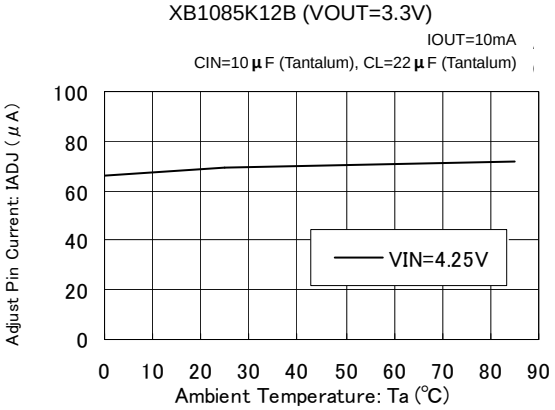


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(7) Load Transient Response

XB1085P331

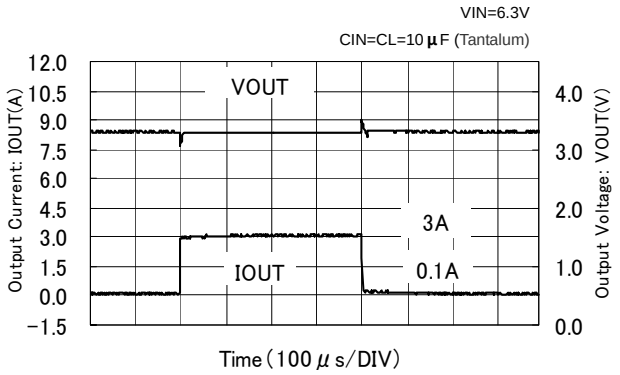


XB1085K12B(VOUT=3.3V)

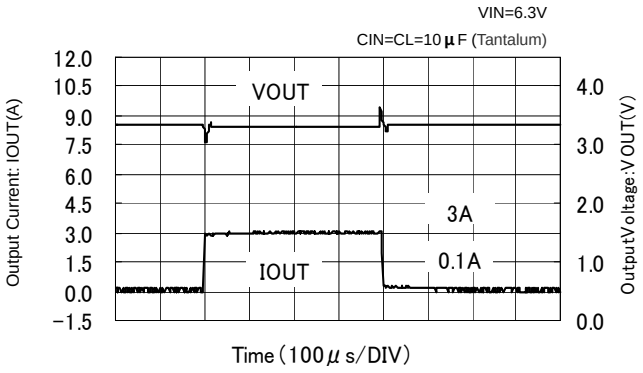


(8) Input Transient Response

XB1085P331

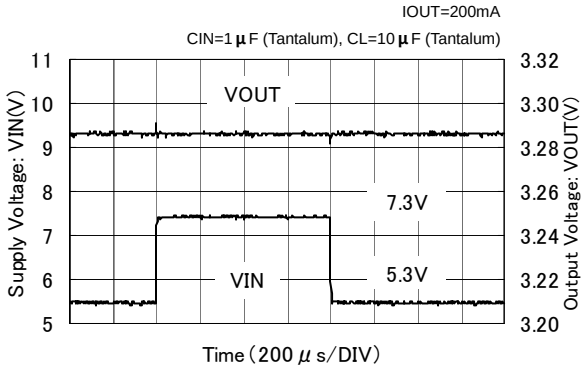


XB1085K12B(VOUT=3.3V)

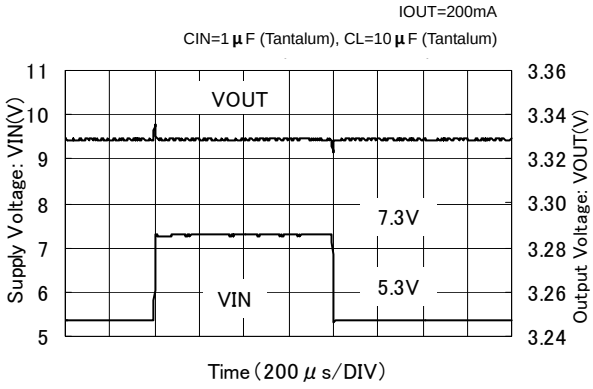


(9) Ripple Rejection Rate

XB1085P331

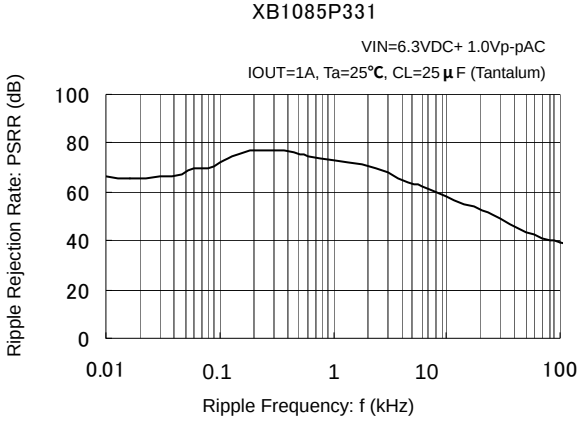


XB1085K12B(VOUT=3.3V)

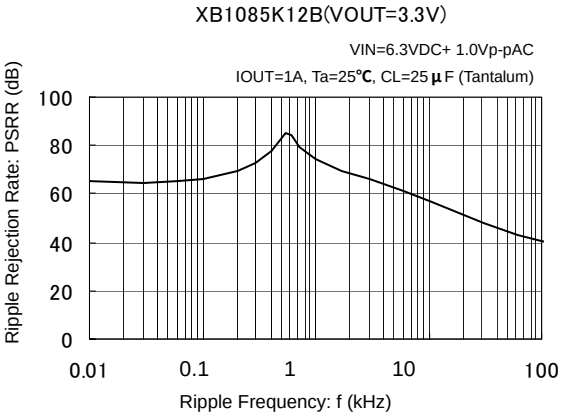

■ PACKAGING INFORMATION


●TO-252

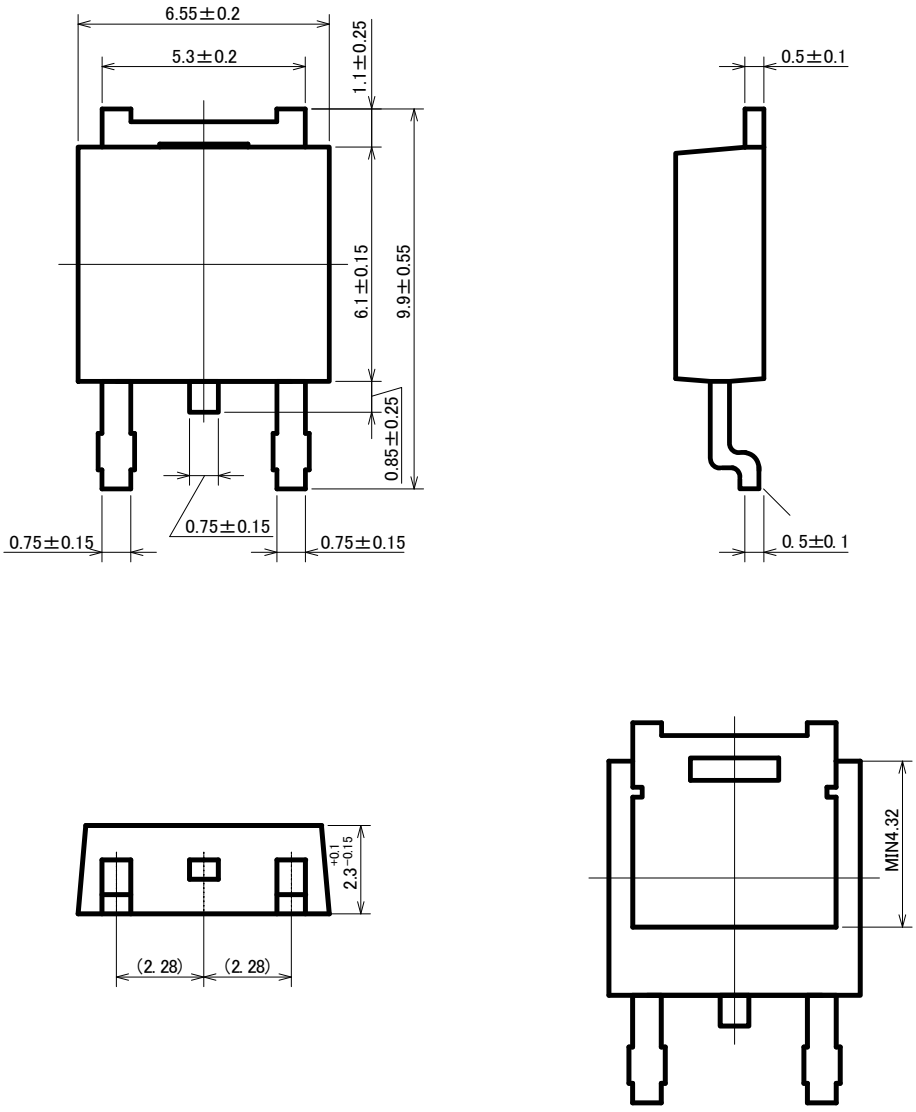

UNIT: mm

■MARKING RULE

●TO-252



TO-252
(TOP VIEW)

①② Represents product series

MARK		PRODUCT SERIES
①	②	
8	5	XB1085****J*

③ Represent the type of regulator

MARK	TYPE	PRODUCT SERIES
P	Fixed Output Type	XB1085P***J*
K	Adjustable (Externally Set)	XB1085K***J*

④⑤ Represents output voltage

MARK		OUTPUT VOTLAGE	PRODUCT SERIES
④	⑤		
1	5	1.5V	XB1085P151J*
1	8	1.8V	XB1085P181J*
2	5	2.5V	XB1085P251J*
3	3	3.3V	XB1085P331J*
5	0	5.0V	XB1085P501J*
1	2	ADJ	XB1082K12BJ*

⑥ Represents output voltage accuracy and output type

MARK	OUTPUT VOLTAGE ACCURACY (OUTPUT TYPE)	PRODUCT SERIES
1	1%	XB1085P**1J*
B	Adjustable	XB1085K12BJ*

⑦ Represents the last digit of production year

ex.)

MARK	PRODUCTION YEAR
7	2007
8	2008

⑧ Represents production lot number

0 to 9, A to Z repeated.

(G, I, J, O, Q, W excepted. '0' of the first digit does not mark.)

* No character inversion used.

ex.)

MARK		PRODUCTION LOT NUMBER
⑧	⑨	
Blank	3	03
1	A	1A

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this catalog is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this catalog.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this catalog.
4. The products in this catalog are nodeveloped, designed, or approved for use with such equipment whose failure of malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.
   (e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this catalog within the specified ranges.
   Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this catalog may be copied or reproduced without the prior permission of Torex Semiconductor Ltd.

TOREX SEMICONDUCTOR LTD.