
isc Silicon NPN Power Transistor 2SD2500

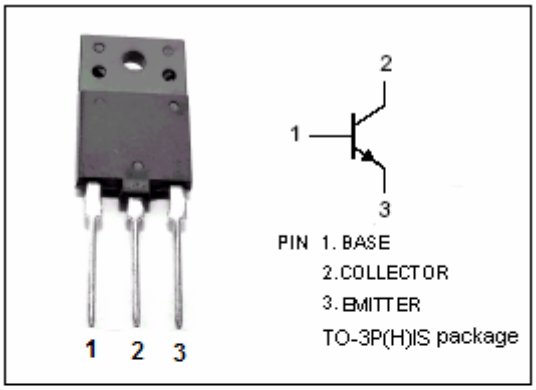

DESCRIPTION


- High Breakdown Voltage-
  : V_{CBO}= 1500V (Min)
- High Switching Speed
- Low Saturation Voltage

APPLICATIONS

- Designed for Color TV horizontal deflection output applications

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	1500	V
V_{CEO}	Collector-Emitter Voltage	600	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current- Continuous	10	A
I_{CP}	Collector Current- Pulse	20	A
I_B	Base Current- Continuous	5	A
P_C	Collector Power Dissipation @ T_C=25℃	50	W
T_J	Junction Temperature	150	℃
T_{stg}	Storage Temperature Range	-55~150	℃

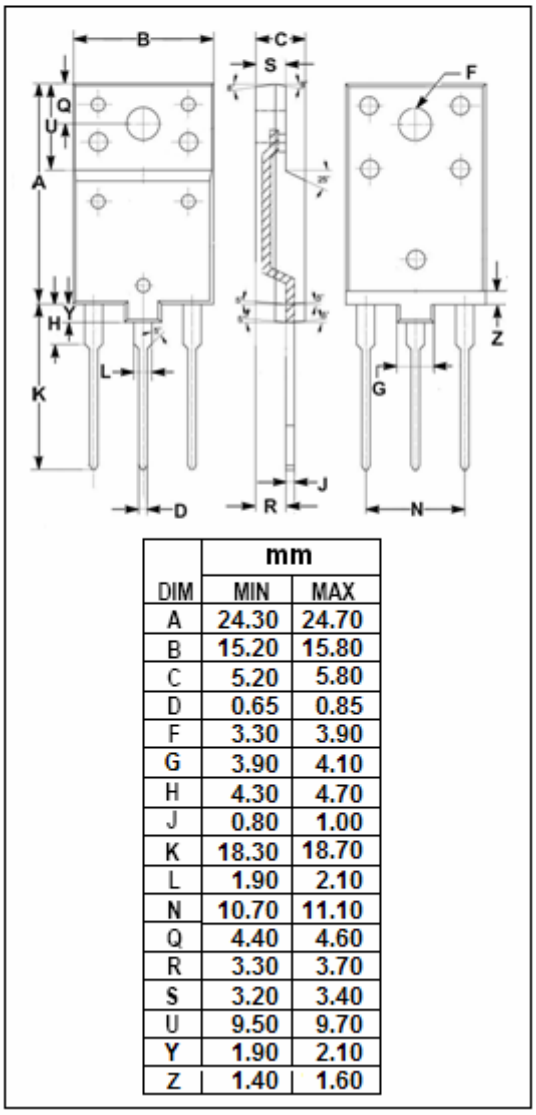

DIM	mm MIN	MAX
A	24.30	24.70
B	15.20	15.80
C	5.20	5.80
D	0.65	0.85
F	3.30	3.90
G	3.90	4.10
H	4.30	4.70
J	0.80	1.00
K	18.30	18.70
L	1.90	2.10
N	10.70	11.10
Q	4.40	4.60
R	3.30	3.70
S	3.20	3.40
U	9.50	9.70
Y	1.90	2.10
Z	1.40	1.60

isc Silicon NPN Power Transistor 2SD2500

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C= 6A; I_B= 1.5A			3.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	I_C= 6A; I_B= 1.5A			1.4	V
I_{CBO}	Collector Cutoff Current	V_{CB}= 1500V ; I_E= 0			1.0	mA
I_{EBO}	Emitter Cutoff Current	V_{EB}= 5V ; I_C= 0			10	μA
$h_{FE\ -1}$	DC Current Gain	I_C= 1A ; V_{CE}= 5V	10		30	
$h_{FE\ -2}$	DC Current Gain	I_C= 6A ; V_{CE}= 5V	4		8	
f_T	Current-Gain—Bandwidth Product	I_C= 0.1A ; V_{CE}= 10V		1.7		MHz
C_{OB}	Output Capacitance	I_E= 0 ; V_{CB}= 10V;f_{test}= 1.0MHz		135		pF

Switching times

t_{stg}	Storage Time	I_{CP}= 6A , $I_{B1(end)}$= 1.5A, f_H= 15.75kHz			11	μs
t_f	Fall Time				0.7	μs

isc Silicon NPN Power Transistor 2SD2500

