TOSHIBA TRANSISTOR SILICON NPN TRIPLE DIFFUSED TYPE

2SD633, 2SD635


HIGH POWER SWITCHING APPLICATIONS

HAMMER DRIVE, PULSE MOTOR DRIVE APPLICATIONS

INDUSTRIAL APPLICATIONS

- High DC Current Gain : h_{FE} = 2000 (Min.)
- Low Saturation Voltage : $V_{CE\ (sat)}$ = 1.5V (Max.)
- Complementary to 2SB673 and 2SB675.

Unit in mm

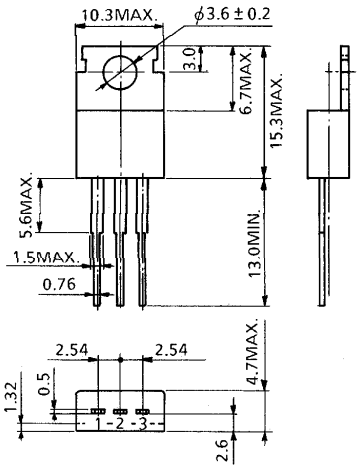

1. BASE
2. COLLECTOR (HEAT SINK)
3. EMITTER

JEDEC	TO-220AB
EIAJ	SC-46
TOSHIBA	2-10A1A


Weight : 1.9g (Typ.)

Mounting kit No. AC75

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage	2SD633	V_{CBO}	100	V
	2SD635		60	
Collector-Emitter Voltage	2SD633	V_{CEO}	100	V
	2SD635		60	
Emitter-Base Voltage		V_{EBO}	5	V
Collector Current		I_C	7	A
		I_{CP}		
Base Current		I_B	0.7	A
Collector Power Dissipation (Tc = 25°C)		P_C	40	W
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	−55~150	°C


EQUIVALENT CIRCUIT

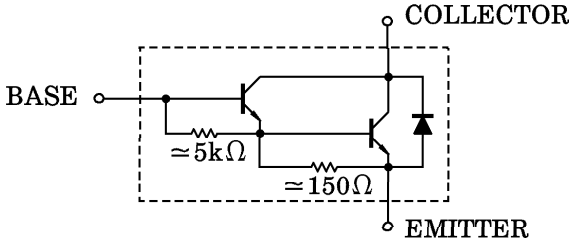



961001EAA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.


ELECTRICAL CHARACTERISTICS (Ta = 25°C)

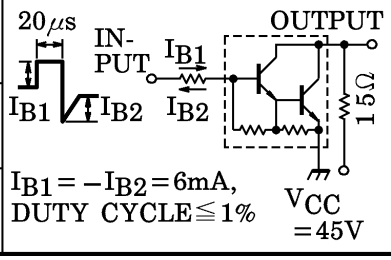CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	2SD633	I_{CBO}	V_{CB}=100V, I_E=0	—	—	100	μA
	2SD635		V_{CB}=60V, I_E=0	—	—	100	
Emitter Cut-off Current		I_{EBO}	V_{EB}=5V, I_C=0	—	—	3.0	mA
Collector-Emitter Breakdown Voltage	2SD633	$V_{(BR)CEO}$	I_C=50mA, I_B=0	100	—	—	V
	2SD635			60	—	—	
DC Current Gain		$h_{FE(1)}$	V_{CE}=3V, I_C=3A	2000	—	15000	
		$h_{FE(2)}$	V_{CE}=3V, I_C=7A	1000	—	—	
Collector-Emitter Saturation Voltage		$V_{CE(sat)(1)}$	I_C=3A, I_B=6mA	—	0.9	1.5	V
		$V_{CE(sat)(2)}$	I_C=7A, I_B=14mA	—	1.2	2.0	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	I_C=3A, I_B=6mA	—	1.5	2.5	V
Switching Time	Turn-on Time	t_{on}		—	0.8	—	μs
	Storage Time	t_{stg}		—	3.0	—	
	Fall Time	t_f	I_{B1} = −I_{B2} = 6mA, DUTY CYCLE ≦ 1%	—	2.5	—	

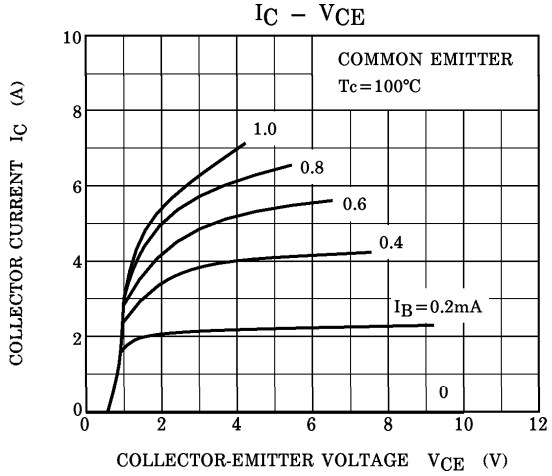


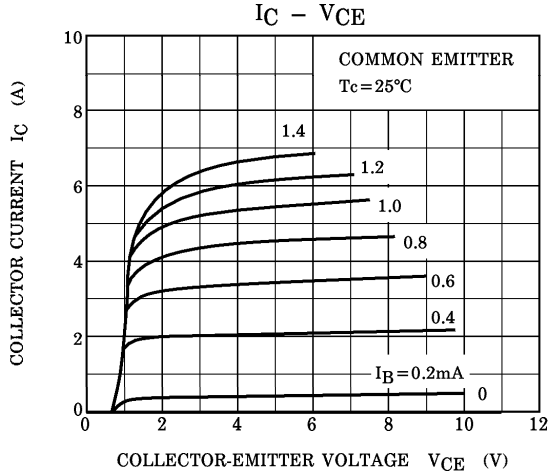


I_C – V_{CE}

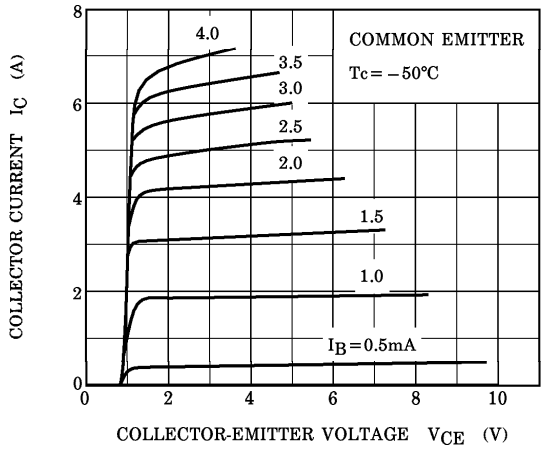


h_{FE} – I_C

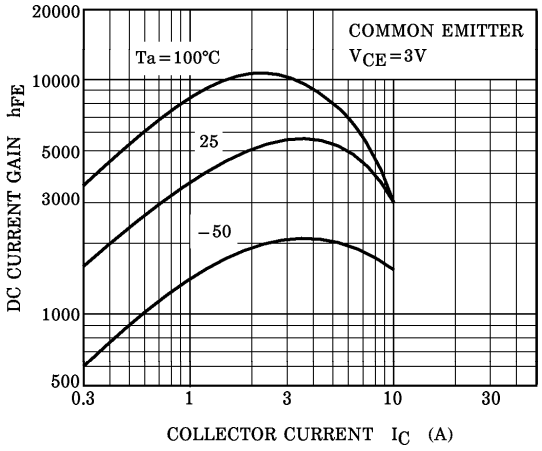


$V_{CE\,(sat)}$ – I_C

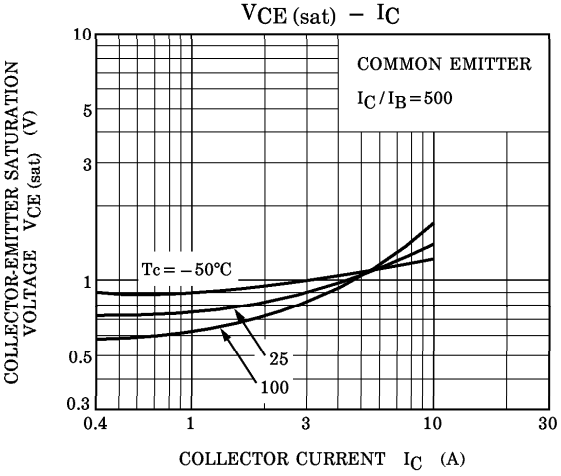

$V_{BE\,(sat)}$ – I_C

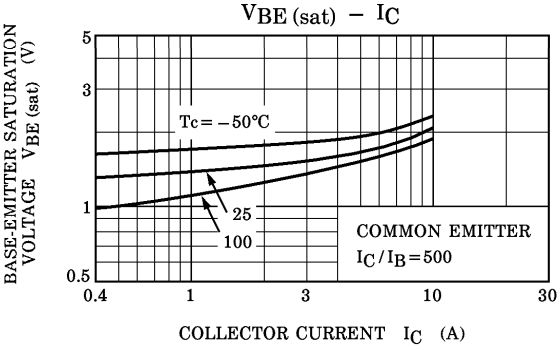

I_C – V_{BE}

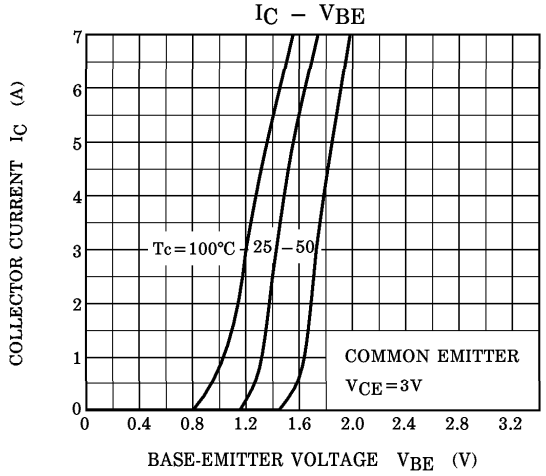

SAFE OPERATING AREA

