New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

2SD834

TRIPLE DIFFUSED PLANER TYPE
HIGH POWER DARLINGTON
SWITCHING

■ Features


- High D.C. current gain
- Low saturation voltage
- Excellent safe operating area
- High reliability

■ Applications

- Electronic ignitor
- Relay & solenoid drivers
- Switching regulators
- Motor controls

■ Outline Drawings


TO-220AB

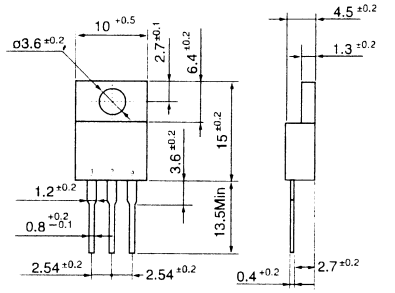

1 : Base
2 : Collector
3 : Emitter

JEDEC	TO-220AB
EIAJ	SC-46

■ Equivalent Circuit Schematic

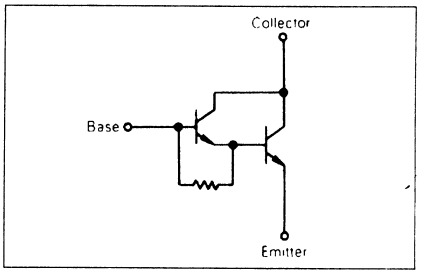

■ Maximum ratings and characteristics

● Absolute maximum ratings (Tc=25°C unless otherwise specified)

Item	Symbol	Ratings	Unit
Collector-Base voltage	V_{CBO}	250	V
Collector-Emitter voltage	V_{CEO}	200	V
Collector-Emitter voltage	$V_{CEO(SUS)}$	180	V
Emitter-Base voltage	V_{EBO}	10	V
Collector current	I_C	4	A
Base current	I_B	0.3	A
Collector power disspation	P_C	25	W
Operating junction temperature	T_j	+150	°C
Storage temperature	T_{stg}	-55 to +150	°C

● Electrical characteristics (T_C =25°C unless otherwise specified)

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Base voltage	V_{CBO}	I_{CBO} = 0.1mA	250			V
Collector-Emitter voltage	V_{CEO}	I_{CEO} = 10mA	200			V
Collector-Emitter voltage	$V_{CEO(SUS)}$	I_C = 1A	180			V
Emitter-Base voltage	V_{EBO}	I_{EBO} = 10mA	10			V
Collector-Base leakage current	I_{CBO}	V_{CBO} = 250V			0.1	mA
Emitter-Base leakage current	I_{EBO}	V_{EBO} = 10V			10	mA
D.C. current gain	h_{FE}	I_C = 2A, V_{CE} = 2V	1500	3000		
Collector-Emitter saturation voltage	$V_{CE(Sat)}$	I_C = 2A, I_B = 2mA			1.5	V
Base-Emitter saturation voltage	$V_{BE(Sat)}$				2.0	V
*1 Switching time	t_{on}	I_C = 2A, I_{B1} = 5mA			1.7	μs
	t_{stg}	I_{B2} = -5mA, R_L = 10 ohm			15.0	μs
	t_f	Pw = 20μs Duty=<2%			18.0	μs

● Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	$R_{th(j-c)}$	Junction to case			5.0	°C/W

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.