
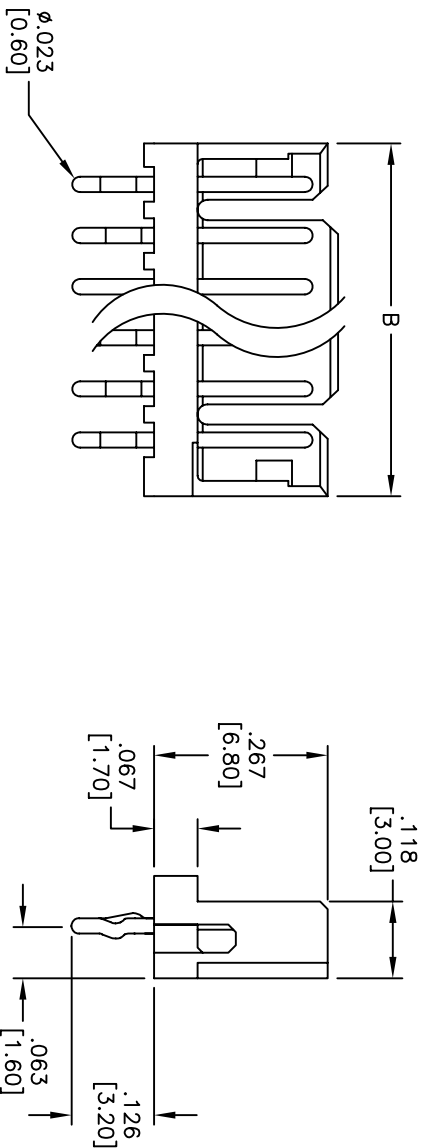
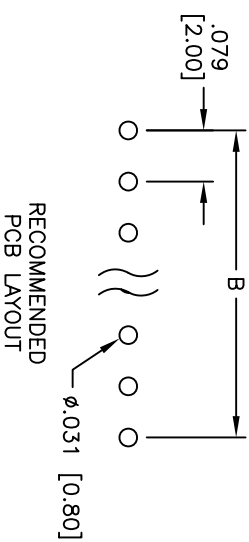


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/08	

APPROVED: _____

DATE: _____ TITLE: _____

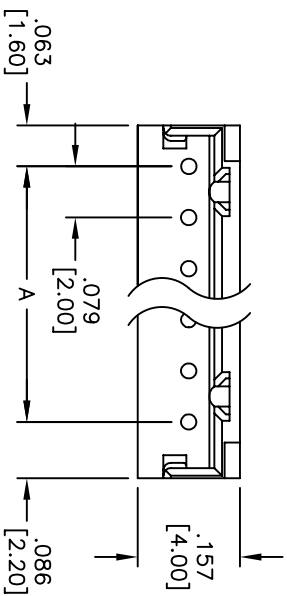

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Natural

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 100 VAC max

Current rating: 2 Amps max

Contact resistance: 10 mohms max

Insulation resistance: 1,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds



Positions: 2 thru 15
A = .079 [2.00] x No. of Positions -1
B = .079 [2.00] x No. of Positions + .079 [2.00]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.079 [2.00] SHROUDED HEADER

RIGHT ANGLE, PCB

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLDERS .X ± .10 ØXX ± .10 .XX ± .020 ØXX ± .015 .XXX ± .015 ØXXX ± .010				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710 .079 [2.00] SHROUDED HEADER RIGHT ANGLE, PCB			
APPROVALS		DATE		TITLE			
DRAWN	SS	3/17/08					
CHECKED							
APPROVED							
SIZE		PART NO.		REV.			
X		2SH-D-XX-TS		-			
REF:	SCALE: NTS		SHEET 1 OF 1				