ISO-CMOS **MT8815**
8 x 12 Analog Switch Array

ISSUE 1 November 1988

Features
- Internal control latches and address decoder
- Short set-up and hold times
- Wide operating voltage: 4.5V to 13.2V
- 12Vpp analog signal capability
- R_{ON} 65Ω max. @ V_{DD}=12V, 25°C
- $\Delta R_{ON} \leq 10\Omega$ @ V_{DD}=12V, 25°C
- Full CMOS switch for low distortion
- Minimum feedthrough and crosstalk
- Separate analog and digital reference supplies
- Low power consumption ISO-CMOS technology

Applications
- Key systems
- PBX systems
- Mobile radio
- Test equipment /instrumentation
- Analog/digital multiplexers
- Audio/Video switching

Ordering Information

MT8815AC	40 Pin Ceramic DIP
MT8815AE	40 Pin Plastic DIP
MT8815AP	44 Pin PLCC

-40° to 85°C

Description

The Mitel MT8815 is fabricated in MITEL's ISO-CMOS technology providing low power dissipation and high reliability. The device contains a 8 x 12 array of crosspoint switches along with a 7 to 96 line decoder and latch circuits. Any one of the 96 switches can be addressed by selecting the appropriate seven address bits. The selected switch can be turned on or off by applying a logical one or zero to the DATA input. V_{SS} is the ground reference of the digital inputs. The range of the analog signal is from V_{DD} to V_{EE}.

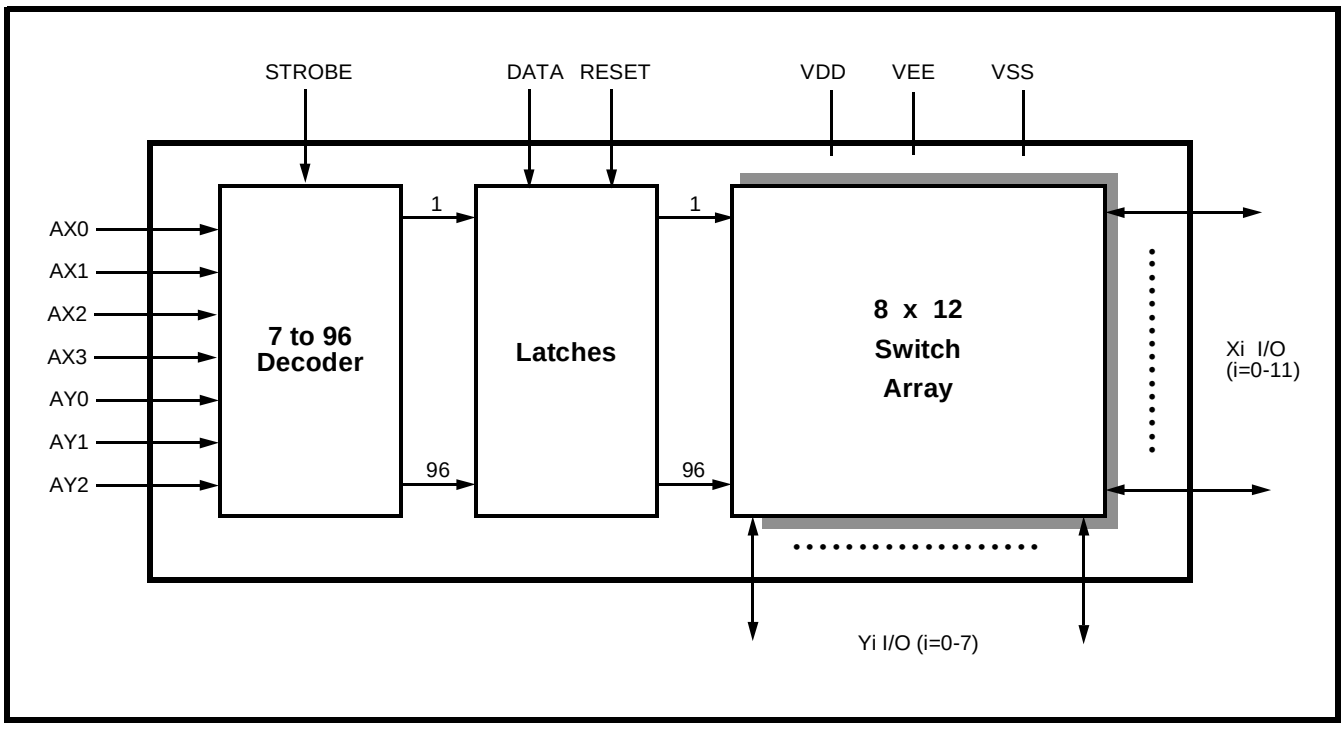

Figure 1 - Functional Block Diagram

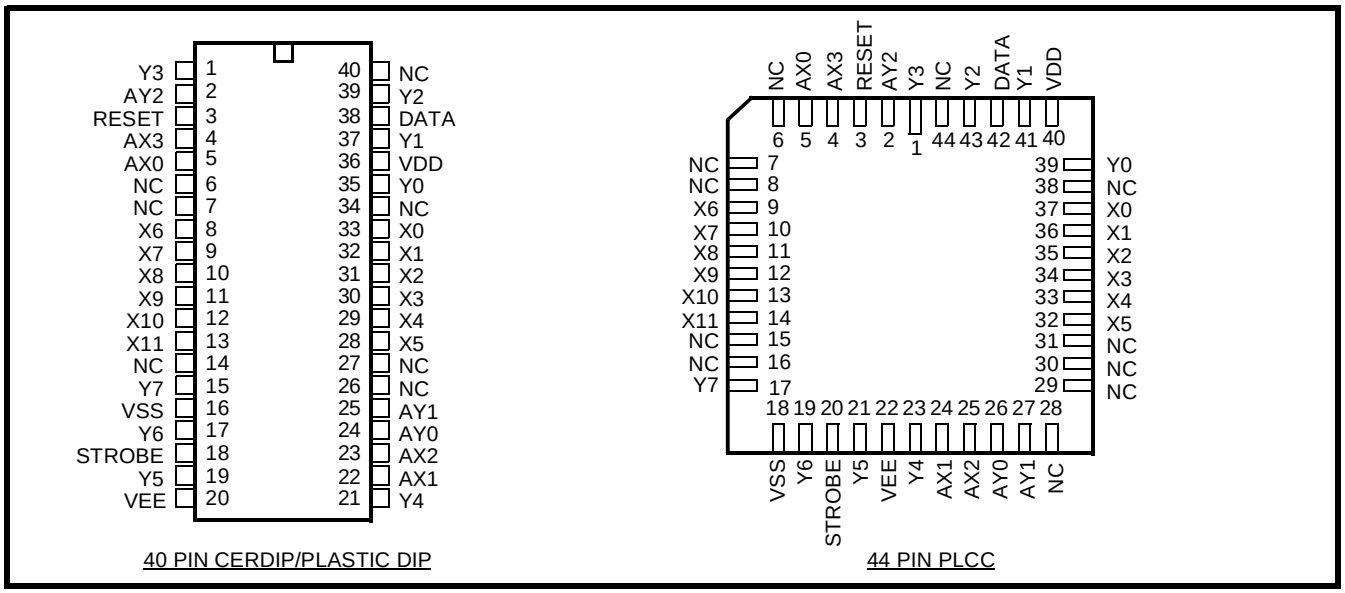

Figure 2 - Pin Connections

Pin Description

Pin #*	Name	Description
1	Y3	**Y3 Analog (Input/Output):** this is connected to the Y3 column of the switch array.
2	AY2	**Y2 Address Line (Input)**.
3	RESET	**Master RESET (Input):** this is used to turn off all switches. Active High.
4,5	AX3,AX0	**X3 and X0 Address Lines (Inputs)**: these are used to select X3 and X0 rows of switches.
6,7	NC	**No Connection.**
8-13	X6-X11	**X6-X11 Analog (Inputs/Outputs):** these are connected to the X6-X11 rows of the switch array.
14	NC	**No Connection**
15	Y7	**Y7 Analog (Input/Output):** this is connected to the Y7 column of the switch array.
16	V_{SS}	**Digital Ground Reference (Input).**
17	Y6	**Y6 Analog (Input/Output):** this is connected to the Y6 column of the switch array.
18	STROBE	**STROBE (Input)**: enables function selected by address and data. Address must be stable before STROBE goes high and DATA must be stable on the falling edge of the STROBE. Active High.
19	Y5	**Y5 Analog (Input/Output):** this is connected to the Y5 column of the switch array.
20	V_{EE}	**Negative Power Supply.**
21	Y4	**Y4 Analog (Input/Output):** this is connected to the Y4 column of the switch array.
22, 23	AX1,AX2	**X1 and X2 Address Lines (Inputs)**.
24, 25	AY0,AY1	**Y0 and Y1 Address Lines (Inputs)**.
26, 27	NC	**No Connection.**
28 - 33	X5-X0	**X5-X0 Analog (Inputs/Outputs):** these are connected to the X5-X0 rows of the switch array.
34	NC	**No Connection.**
35	Y0	**Y0 Analog (Input/Output)**: this is connected to the Y0 column of the switch array.
36	V_{DD}	**Positive Power Supply.**
37	Y1	**Y1 Analog (Input/Output)**: this is connected to the Y1 column of the switch array.
38	DATA	**DATA (Input)**: a logic high input will turn on the selected switch and a logic low will turn off the selected switch. Active High.
39	Y2	**Y2 Analog (Input/Output)**: this is connected to the Y2 column of the switch array.
40	NC	**No Connection.**

* Plastic DIP and CERDIP only.

Functional Description

The MT8815 is an analog switch matrix with an array size of 8×12. The switch array is arranged such that there are 8 columns by 12 rows. The columns are referred to as the Y inputs/outputs and the rows are the X inputs/outputs. The crosspoint analog switch array will interconnect any X I/O with any Y I/O when turned on and provide a high degree of isolation when turned off. The control memory consists of a 96 bit write only RAM in which the bits are selected by the address inputs (AY0-AY2, AX0-AX3). Data is presented to the memory on the DATA input. Data is asynchronously written into memory whenever the STROBE input is high and is latched on the falling edge of STROBE. A logical “1” written into a memory cell turns the corresponding crosspoint switch on and a logical “0” turns the crosspoint off. Only the crosspoint switches corresponding to the addressed memory location are altered when data is written into memory. The remaining switches retain their previous states. Any combination of X and Y inputs/outputs can be interconnected by establishing appropriate patterns in the control memory. A logical “1” on the RESET input will asynchronously return all memory locations to logical “0” turning off all crosspoint switches. Two voltage reference pins (V_{SS} and V_{EE}) are provided for the MT8815 to enable switching of negative analog signals. The range for digital signals is from V_{DD} to V_{SS} while the range for analog signals is from V_{DD} to V_{EE}. V_{SS} and V_{EE} pins can be tied together if a single voltage reference is needed.

Address Decode

The seven address inputs along with the STROBE are logically ANDed to form an enable signal for the resettable transparent latches. The DATA input is buffered and is used as the input to all latches. To write to a location, RESET must be low while the address and data are set up. Then the STROBE input is set high and then low causing the data to be latched. The data can be changed while STROBE is high, however, the corresponding switch will turn on and off in accordance with the DATA input. DATA must be stable on the falling edge of STROBE in order for correct data to be written to the latch.

Absolute Maximum Ratings*- Voltages are with respect to V_{EE} unless otherwise stated.

	Parameter		Symbol	Min	Max	Units
1	Supply Voltage		V_{DD} V_{SS}	-0.3 -0.3	15.0 V_{DD}+0.3	V V
2	Analog Input Voltage		V_{INA}	-0.3	V_{DD}+0.3	V
3	Digital Input Voltage		V_{IN}	V_{SS}-0.3	V_{DD}+0.3	V
4	Current on any I/O Pin		I		±15	mA
5	Storage Temperature		T_S	-65	+150	°C
6	Package Power Dissipation	PLASTIC DIP CERDIP	P_D P_D		0.6 1.0	W W

* Exceeding these values may cause permanent damage. Functional operation under these conditions is not implied.

Recommended Operating Conditions - Voltages are with respect to V_{EE} unless otherwise stated.

	Characteristics	Sym	Min	Typ	Max	Units	Test Conditions
1	Operating Temperature	T_O	-40	25	85	°C	
2	Supply Voltage	V_{DD} V_{SS}	4.5 V_{EE}		13.2 V_{DD}-4.5	V V	
3	Analog Input Voltage	V_{INA}	V_{EE}		V_{DD}	V	
4	Digital Input Voltage	V_{IN}	V_{SS}		V_{DD}	V	

DC Electrical Characteristics† - Voltages are with respect to V_{EE}=V_{SS}=0V, V_{DD} =12V unless otherwise stated.

	Characteristics	Sym	Min	Typ‡	Max	Units	Test Conditions
1	Quiescent Supply Current	I_{DD}		1	100	µA	All digital inputs at V_{IN}=V_{SS} or V_{DD}
				0.4	1.5	mA	All digital inputs at V_{IN}=2.4V + V_{SS}; V_{SS}=7.0V
				5	15	mA	All digital inputs at V_{IN}=3.4V
2	Off-state Leakage Current (See G.9 in Appendix)	I_{OFF}		±1	±500	nA	$IV_{Xi} - V_{Yj}I = V_{DD} - V_{EE}$ See Appendix, Fig. A.1
3	Input Logic "0" level	V_{IL}			0.8+V_{SS}	V	V_{SS}=7.5V; V_{EE}=0V
4	Input Logic "1" level	V_{IH}	2.0+V_{SS}			V	V_{SS}=6.5V; V_{EE}=0V
5	Input Logic "1" level	V_{IH}	3.3			V	
6	Input Leakage (digital pins)	I_{LEAK}		0.1	10	µA	All digital inputs at V_{IN} = V_{SS} or V_{DD}

† DC Electrical Characteristics are over recommended temperature range.
‡ Typical figures are at 25°C and are for design aid only; not guaranteed and not subject to production testing.

DC Electrical Characteristics- Switch Resistance - V_{DC} is the external DC offset applied at the analog I/O pins.

	Characteristics	Sym	25°C		70°C		85°C		Units	Test Conditions
			Typ	Max	Typ	Max	Typ	Max		
1	On-state Resistance V_{DD}=12V V_{DD}=10V V_{DD}= 5V (See G.1, G.2, G.3 in Appendix)	R_{ON}	45 55 120	65 75 185		75 85 215		80 90 225	Ω Ω Ω	V_{SS}=V_{EE}=0V,V_{DC}=V_{DD}/2, IV_{Xi}-V_{Yj}I = 0.4V See Appendix, Fig. A.2
2	Difference in on-state resistance between two switches (See G.4 in Appendix)	ΔR_{ON}	5	10		10		10	Ω	V_{DD}=12V, V_{SS}=V_{EE}=0, V_{DC}=V_{DD}/2, IV_{Xi}-V_{Yj}I = 0.4V See Appendix, Fig. A.2

AC Electrical Characteristics† - Crosspoint Performance

-Voltages are with respect to V_{DD}=5V, V_{SS}=0V, V_{EE}=-7V, unless otherwise stated.

	Characteristics	Sym	Min	Typ‡	Max	Units	Test Conditions
1	Switch I/O Capacitance	C_S		20		pF	f=1 MHz
2	Feedthrough Capacitance	C_F		0.2		pF	f=1 MHz
3	Frequency Response Channel "ON" 20LOG(V_{OUT}/V_{Xi})=-3dB	F_{3dB}		45		MHz	Switch is "ON"; V_{INA} = 2Vpp sinewave; R_L = 1kΩ See Appendix, Fig. A.3
4	Total Harmonic Distortion (See G.5, G.6 in Appendix)	THD		0.01		%	Switch is "ON"; V_{INA} = 2Vpp sinewave f= 1kHz; R_L=1kΩ
5	Feedthrough Channel "OFF" Feed.=20LOG (V_{OUT}/V_{Xi}) (See G.8 in Appendix)	FDT		-95		dB	All Switches "OFF"; V_{INA}= 2Vpp sinewave f= 1kHz; R_L= 1kΩ. See Appendix, Fig. A.4
6	Crosstalk between any two channels for switches Xi-Yi and Xj-Yj. Xtalk=20LOG (V_{Yj}/V_{Xi}). (See G.7 in Appendix).	X_{talk}		-45		dB	V_{INA}=2Vpp sinewave f= 10MHz; R_L = 75Ω.
				-90		dB	V_{INA}=2Vpp sinewave f= 10kHz; R_L = 600Ω.
				-85		dB	V_{INA}=2Vpp sinewave f= 10kHz; R_L = 1kΩ.
				-80		dB	V_{INA}=2Vpp sinewave f= 1kHz; R_L = 10kΩ. Refer to Appendix, Fig. A.5 for test circuit.
7	Propagation delay through switch	t_{PS}			30	ns	R_L=1kΩ; C_L=50pF

† Timing is over recommended temperature range. See Fig. 3 for control and I/O timing details.
‡ Typical figures are at 25°C and are for design aid only; not guaranteed and not subject to production testing.
Crosstalk measurements are for Plastic DIPS only, crosstalk values for PLCC packages are approximately 5dB better.

AC Electrical Characteristics† - Control and I/O Timings

- Voltages are with respect to V_{DD}=5V, V_{SS}=0V, V_{EE}=-7V, unless otherwise stated.

	Characteristics	Sym	Min	Typ‡	Max	Units	Test Conditions
1	Control Input crosstalk to switch (for DATA, STROBE, Address)	CX_{talk}		30		mVpp	V_{IN}=3V squarewave; R_{IN}=1kΩ, R_L=10kΩ. See Appendix, Fig. A.6
2	Digital Input Capacitance	C_{DI}		10		pF	f=1MHz
3	Switching Frequency	F_O			20	MHz	
4	Setup Time DATA to STROBE	t_{DS}	10			ns	R_L= 1kΩ, C_L=50pF ①
5	Hold Time DATA to STROBE	t_{DH}	10			ns	R_L= 1kΩ, C_L=50pF ①
6	Setup Time Address to STROBE	t_{AS}	10			ns	R_L= 1kΩ, C_L=50pF ①
7	Hold Time Address to STROBE	t_{AH}	10			ns	R_L= 1kΩ, C_L=50pF ①
8	STROBE Pulse Width	t_{SPW}	20			ns	R_L= 1kΩ, C_L=50pF ①
9	RESET Pulse Width	t_{RPW}	40			ns	R_L= 1kΩ, C_L=50pF ①
10	STROBE to Switch Status Delay	t_S		40	100	ns	R_L= 1kΩ, C_L=50pF ①
11	DATA to Switch Status Delay	t_D		50	100	ns	R_L= 1kΩ, C_L=50pF ①
12	RESET to Switch Status Delay	t_R		35	100	ns	R_L= 1kΩ, C_L=50pF ①

† Timing is over recommended temperature range. See Fig. 3 for control and I/O timing details.
Digital Input rise time (tr) and fall time (tf) = 5ns.
‡ Typical figures are at 25°C and are for design aid only; not guaranteed and not subject to production testing.
① Refer to Appendix, Fig. A.7 for test circuit.

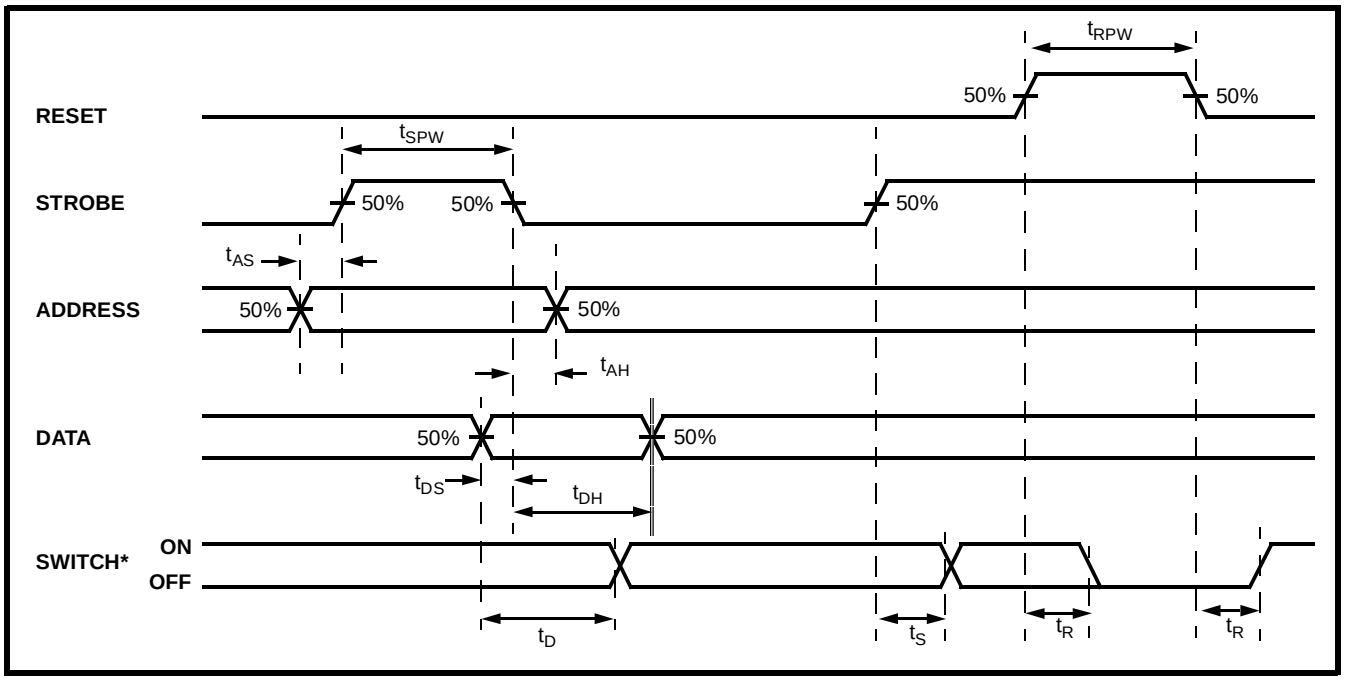

Figure 3 - Control Memory Timing Diagram

* See Appendix, Fig. A.7 for switching waveform

AX0	AX1	AX2	AX3	AY0	AY1	AY2	Connection
0	0	0	0	0	0	0	X0-Y0
1	0	0	0	0	0	0	X1-Y0
0	1	0	0	0	0	0	X2-Y0
1	1	0	0	0	0	0	X3-Y0
0	0	1	0	0	0	0	X4-Y0
1	0	1	0	0	0	0	X5-Y0
0	1	1	0	0	0	0	No Connection ①
1	1	1	0	0	0	0	No Connection ①
0	0	0	1	0	0	0	X6-Y0
1	0	0	1	0	0	0	X7-Y0
0	1	0	1	0	0	0	X8-Y0
1	1	0	1	0	0	0	X9-Y0
0	0	1	1	0	0	0	X10-Y0
1	0	1	1	0	0	0	X11-Y0
0	1	1	1	0	0	0	No Connection ①
1	1	1	1	0	0	0	No Connection ①
0 ↓ 1	0 ↓ 0	0 ↓ 1	0 ↓ 1	1 ↓ 1	0 ↓ 0	0 ↓ 0	X0-Y1 ↓↓ X11-Y1
0 ↓ 1	0 ↓ 0	0 ↓ 1	0 ↓ 1	0 ↓ 0	1 ↓ 1	0 ↓ 0	X0-Y2 ↓↓ X11-Y2
0 ↓ 1	0 ↓ 0	0 ↓ 1	0 ↓ 1	1 ↓ 1	1 ↓ 1	0 ↓ 0	X0-Y3 ↓↓ X11-Y3
0 ↓ 1	0 ↓ 0	0 ↓ 1	0 ↓ 1	0 ↓ 0	0 ↓ 0	1 ↓ 1	X0-Y4 ↓↓ X11-Y4
0 ↓ 1	0 ↓ 0	0 ↓ 1	0 ↓ 1	1 ↓ 1	0 ↓ 0	1 ↓ 1	X0-Y5 ↓↓ X11-Y5
0 ↓ 1	0 ↓ 0	0 ↓ 1	0 ↓ 1	0 ↓ 0	1 ↓ 1	1 ↓ 1	X0-Y6 ↓↓ X11-Y6
0 ↓ 1	0 ↓ 0	0 ↓ 1	0 ↓ 1	1 ↓ 1	1 ↓ 1	1 ↓ 1	X0-Y7 ↓↓ X11-Y7

Table 1. Address Decode Truth Table

① This address has no effect on device status.