NEOCENE 2T0612 | SPECIFICATION



SUMMARY

Diameter ∅6 step motor is the industry's most sophisticated micro step motor

USES

Portable photo printer、smart phone zoom lens micro and medical syringe

➢ DIMENSIONS：

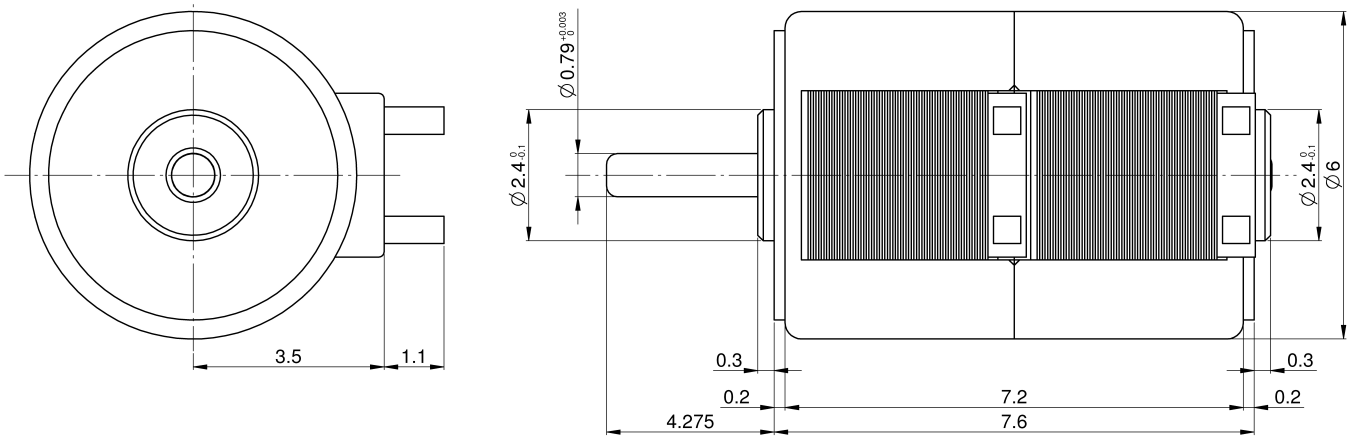

NEOCENE 2T0612 | SPECIFICATION

Item	2T0612
Standard voltage	5.0V
Standard Current	300 mA/Phase
Number of phase	4 Phase
Step angles	18° / Step
Excitation	2-2 Bipolar
Pull-out torque	2.0 g-cm or more / 3000 pps
Pull-in torque	2.5 g-cm or more / 1000 pps
Holding torque	4.0 g-cm or more
Resistance per phase	20 Ω
Max pull-out pulse rate	3000 pps or more
Max pull-in pulse rate	1500 pps or more

➢ CHARACTERISTICS：

5V

