Advance Information

Surface Mount Schottky Power Rectifier

SOD–123 Power Surface Mount Package

MBR0540T1

SCHOTTKY BARRIER RECTIFIER 0.5 AMPERES 40 VOLTS



CASE 425–04, Style 1 SOD–123

The Schottky Power Rectifier employs the Schottky Barrier principle with a barrier metal that produces optimal forward voltage drop–reverse current tradeoff. Ideally suited for low voltage, high frequency rectification, or as a free wheeling and polarity protection diodes in surface mount applications where compact size and weight are critical to the system. This package provides an alternative to the leadless 34 MELF style package. These state–of–the–art devices have the following features:

- Guardring for Stress Protection
- Very Low Forward Voltage
- Epoxy Meets UL94, VO at 1/8″
- Package Designed for Optimal Automated Board Assembly

Mechanical Characteristics:

- Reel Options: 3,000 per 7 inch reel / 8 mm tape
- Reel Options: 10,000 per 13 inch reel / 8 mm tape
- Device Marking: B4
- Polarity Designator: Cathode Band
- Weight: 11.7 mg (approximately)
- Case: Epoxy Molded
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C max. for 10 Seconds

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	40	V
Average Rectified Forward Current (At Rated V_R, T_C = 115°C)	I_O	0.5	A
Peak Repetitive Forward Current (At Rated V_R, Square Wave, 20 kHz, T_C = 115°C)	I_{FRM}	1.0	A
Non–Repetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, single phase, 60 Hz)	I_{FSM}	5.5	A
Storage / Operating Case Temperature	T_{stg}, T_C	–55 to 150	°C
Operating Junction Temperature	T_J	–55 to 150	°C
Voltage Rate of Change (Rated V_R, T_J = 25°C)	dv/dt	1,000	V/μs

THERMAL CHARACTERISTICS

Thermal Resistance – Junction–to–Lead (2) Thermal Resistance – Junction–to–Ambient (3)	R_{tjl} R_{tja}	118 206	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1)	V_F	**T_J = 25°C**	**T_J = 100°C**	V
(I_F = 0.5 A) (I_F = 1 A)		0.51 0.62	0.46 0.61	
Maximum Instantaneous Reverse Current	I_R	**T_J = 25°C**	**T_J = 100°C**	μA
(V_R = 40 V) (V_R = 20 V)		20 10	5,000 13,000	

This document contains information on a new product. Specifications and information herein are subject to change without notice.

(1) Pulse Test: Pulse Width ≤ 250 μs, Duty Cycle ≤ 2.0%.
(2) Mounted with minimum recommended pad size, PC Board FR4.
(3) 1 inch square pad size (1 X 0.5 inch for each lead) on FR4 board.

Rev 2

© Motorola, Inc. 1996

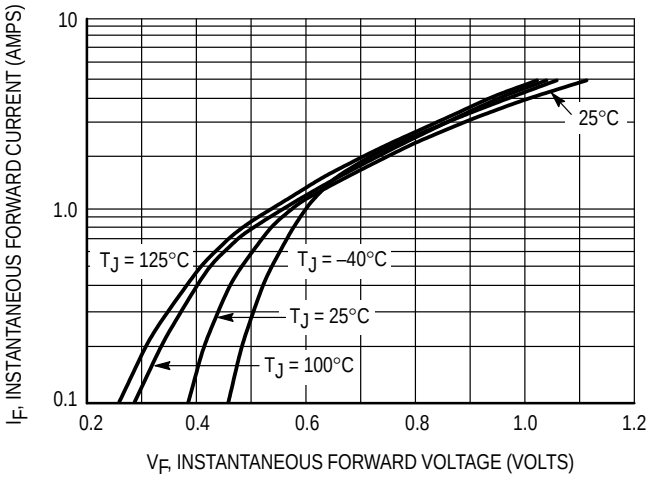


Figure 1. Typical Forward Voltage

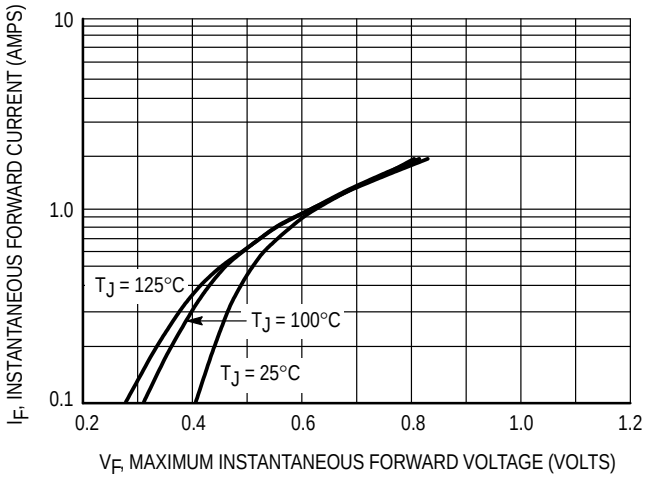


Figure 2. Maximum Forward Voltage

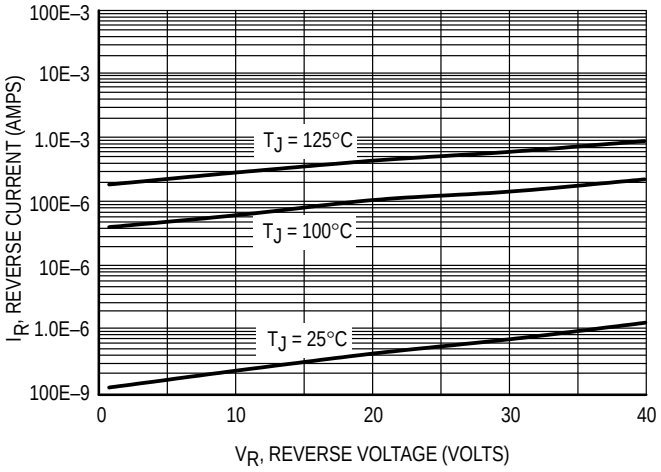


Figure 3. Typical Reverse Current

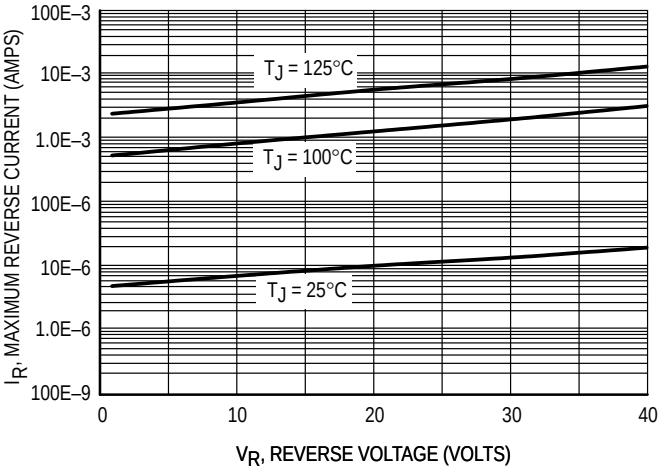


Figure 4. Maximum Reverse Current

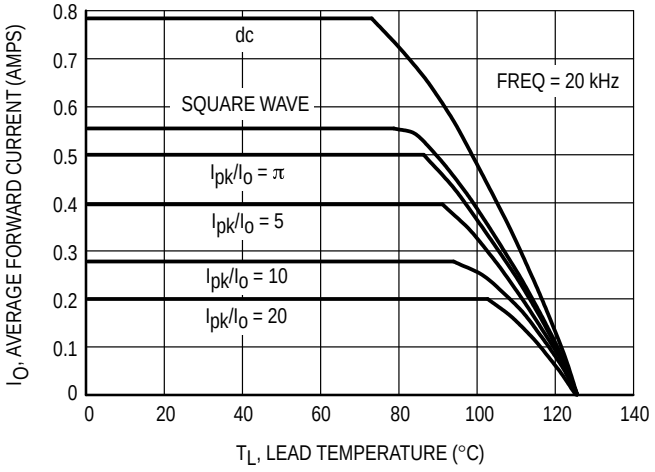


Figure 5. Current Derating

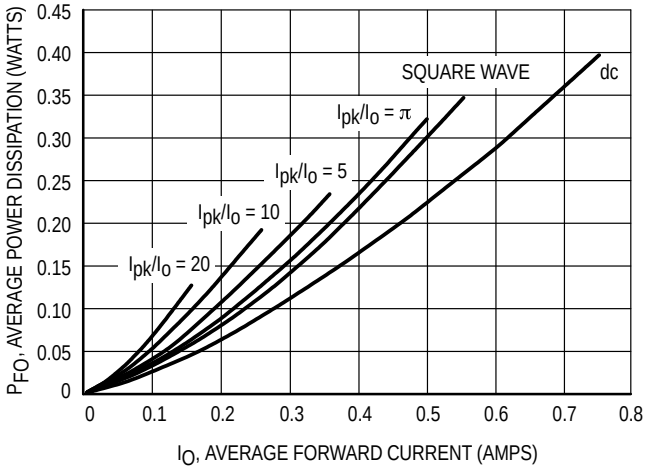


Figure 6. Forward Power Dissipation

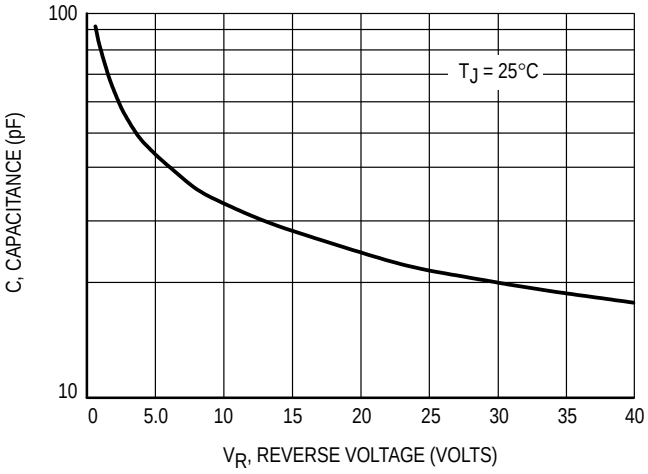


Figure 7. Capacitance

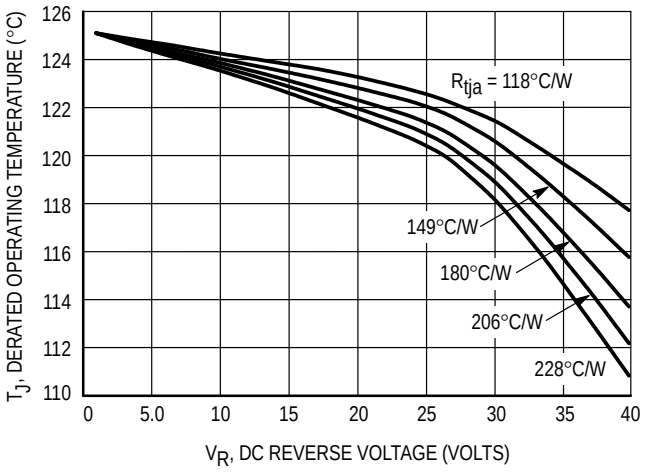


Figure 8. Typical Operating Temperature Derating*

* Reverse power dissipation and the possibility of thermal runaway must be considered when operating this device under any reverse voltage conditions. Calculations of T_J therefore must include forward and reverse power effects. The allowable operating T_J may be calculated from the equation: $T_J = T_{Jmax} - r(t)(Pf + Pr)$ where
r(t) = thermal impedance under given conditions,
Pf = forward power dissipation, and
Pr = reverse power dissipation
This graph displays the derated allowable T_J due to reverse bias under DC conditions only and is calculated as $T_J = T_{Jmax} - r(t)Pr$, where r(t) = Rthja. For other power applications further calculations must be performed.

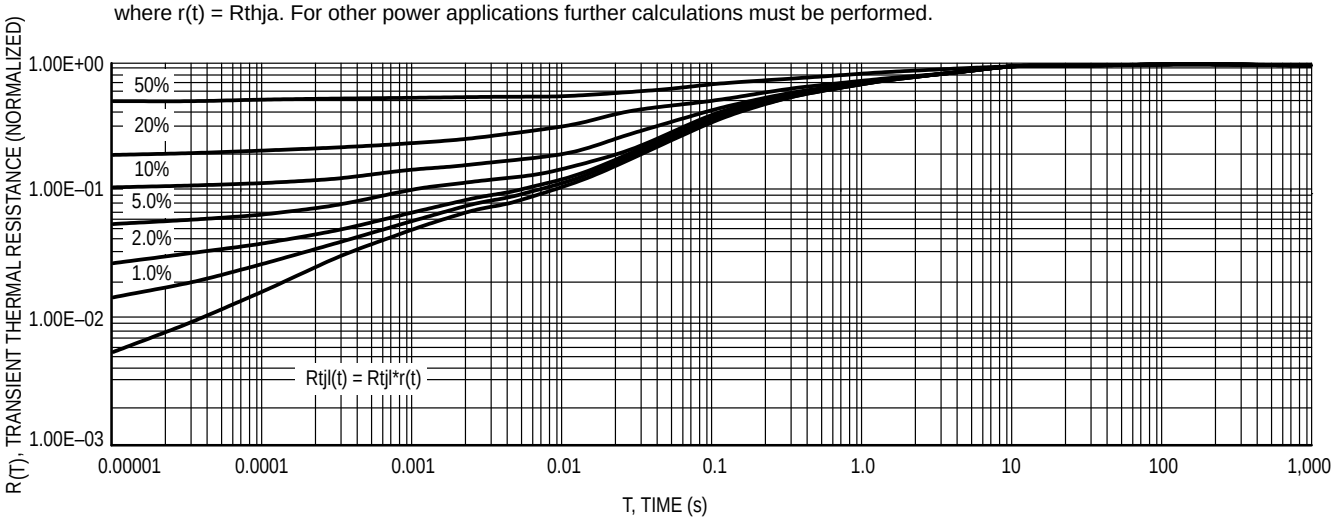


Figure 9. Thermal Response Junction to Lead


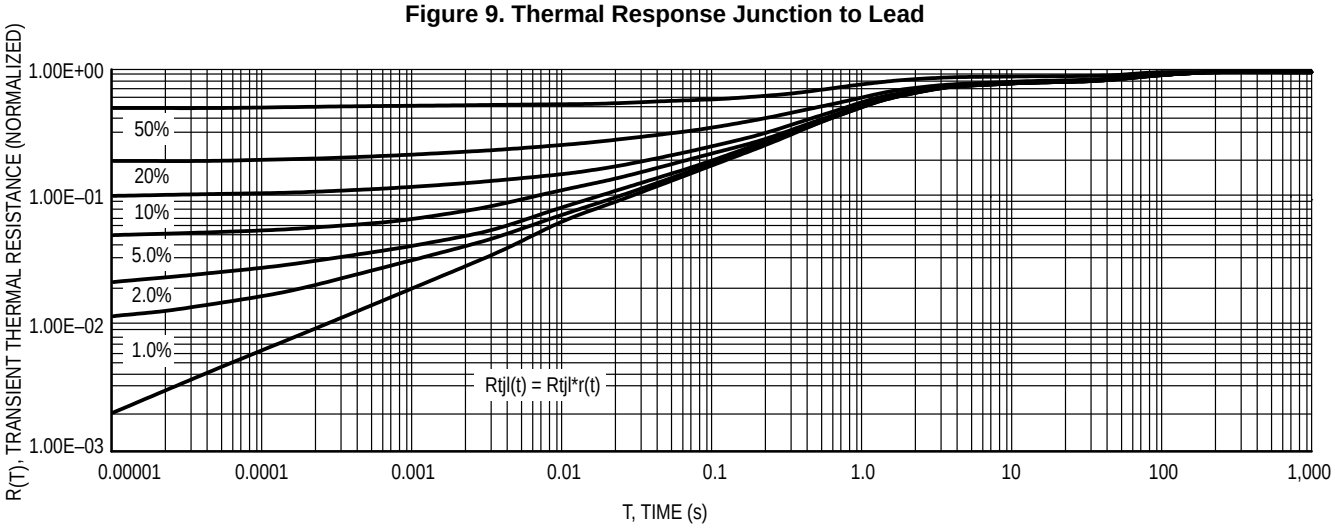



Figure 10. Thermal Response Junction to Ambient

RECOMMENDED FOOTPRINT FOR SOD–123

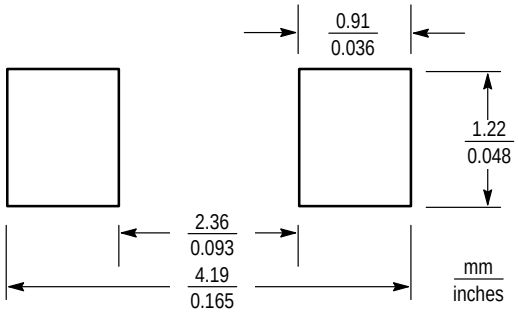

SOD–123

PACKAGE DIMENSIONS

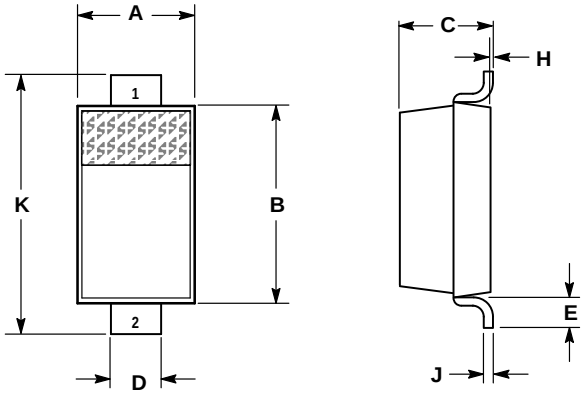

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.055	0.071	1.40	1.80
B	0.100	0.112	2.55	2.85
C	0.037	0.053	0.95	1.35
D	0.020	0.028	0.50	0.70
E	0.004	—	0.25	—
H	0.000	0.004	0.00	0.10
J	—	0.006	—	0.15
K	0.140	0.152	3.55	3.85

STYLE 1:
PIN 1. CATHODE
2. ANODE

CASE 425–04
ISSUE C

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:
USA / EUROPE / Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 1–303–675–2140 or 1–800–441–2447

JAPAN: Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4–32–1, Nishi–Gotanda, Shinagawa–ku, Tokyo 141, Japan. 81–3–5487–8488

Customer Focus Center: 1–800–521–6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1–602–244–6609
Motorola Fax Back System – US & Canada ONLY 1–800–774–1848
– http://sps.motorola.com/mfax/

ASIA / PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298

HOME PAGE: http://motorola.com/sps/