

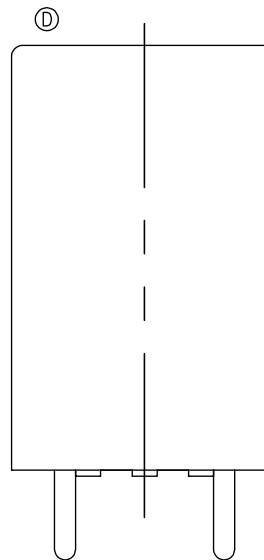
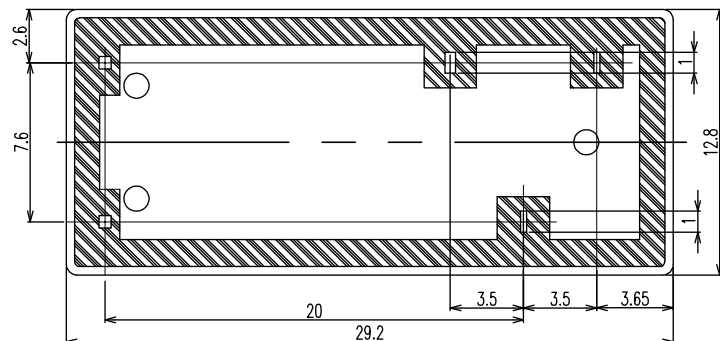
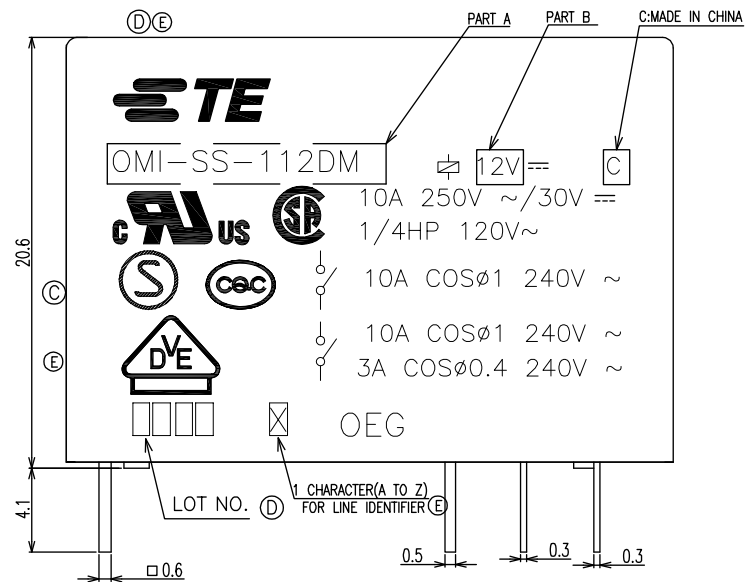



P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	CHANGE LODO,VENT HOLE;ADD CQC,LINE IDENTIFIER, PLATING THICKNESS ECO-12-005725	20AUG12	D,L	BH,Y
	F	CHANGE THE VENT HOLE SHAPE FROM RECTANGLE TO CIRCLE ONE ECO-13-015347	16-DEC-13	XL,Y	B,F

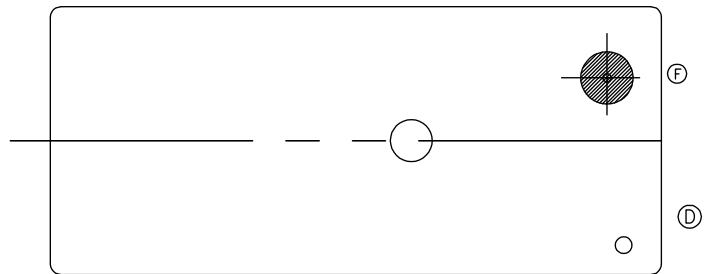

CONNECTION DIAGRAM
(BOTTOM VIEW)



DRILLING DIAGRAM(2/1)
(BOTTOM VIEW)

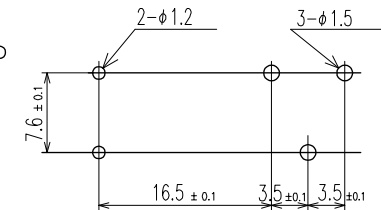

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	H.SASAKI
CHK	Y.OIKAWA


APVD
A.NAGAI
PRODUCT SPEC

PRODUCT SPEC
—
APPLICATION SPEC

APPLICATION SPEC	—
WEIGHT	

WEIGHT	—
CUSTOMER DR	

DIMENSIONS:
mm



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	$\pm -$
1 PLC	$\pm -$
2 PLC	$\pm -$
3 PLC	$\pm -$
4 PLC	$\pm -$

	ANGLES
	FINISH

DWN	H.SASAKI
-----	----------

CHK
Y.OIKAWA

APVD
A. NAGAI

PRODUCT SPEC

APPLICATION SPEC

APPLICATION SPEC

WEIGHT	—
--------	---

NAME

[illegible]

OM

SIZE	CAGE CODE
------	-----------

A300779



TE Connectivity

OMI-1T 300 CUSTOMER DRAWING

SIZE	CAGE CODE
------	-----------

A3	00779
----	-------

RESTRICTED TO

2	REV	F
---	-----	---

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

HB

P

LTR

DESCRIPTION

DATE

DWN

APVD

NOTES:

1.-SH- : WASHABLE TYPE

2.LOT NO. SYSTEM AS FOLLOWING:

0701

WEEK

YEAR

3.GENERAL TOLERANCE AS FOLLOWING:

TOLERANCE	
0~0.99mm	±0.1
1mm~2.99mm	±0.2
3mm MIN.	±0.3

- ④⑤4.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH,THICKNESS AND DIAMETER.
+0.5mm FOR LENGTH.

4-1440000-5	OMI-SH-148L	48V	OMI-SH-148L
4-1440000-2	OMI-SH-124D	24V	OMI-SH-124D
3-1440000-5	OMI-SH-105L	5V	OMI-SH-105L
3-1440000-4	OMI-SH-105D	5V	OMI-SH-105D
PART NO	DESCRIPTION	PART B	PART A

RELAY TYPE

		UV RESIN	UV SEAL	18
		EPOXY RESIN	SEAL	17
UL94 V-0		PBT	CASE	16
		—	TAPE	15
CLASS E		UEW	MAGNETIC WIRE	14
UL94 V-0		PET	BASE	13
UL94 V-0		PBT	BOBBIN	12
	SOLDER DIP	CP WIRE	COIL TERMINAL	11
UL94 V-0		PPS	CARD	10
		Ag ALLOY	MOVABLE CONTACT	9
		Ag ALLOY	STATIONARY CONTACT	8
		Cu ALLOY	HINGE SPRING	7
	SOLDER DIP	Cu ALLOY	B TERMINAL	6
	SOLDER DIP	Cu ALLOY	M TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
		STEEL	CORE	3
		STEEL	ARMATURE	2
		STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

H.SASAKI

CHK

Y.OIKAWA

APVD

A.NAGAI

PRODUCT SPEC

—

APPLICATION SPEC

—

WEIGHT

—

CUSTOMER DRAWING



TE Connectivity

NAME

OMI-1T 300 CUSTOMER DRAWING

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C=3-1440000-4

—

SCALE 4:1

SHEET 2 OF 2

REV F

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL

FINISH

—