



DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2003

LOC		DIST		REVISIONS			
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


FEED TYPE MECHANICAL

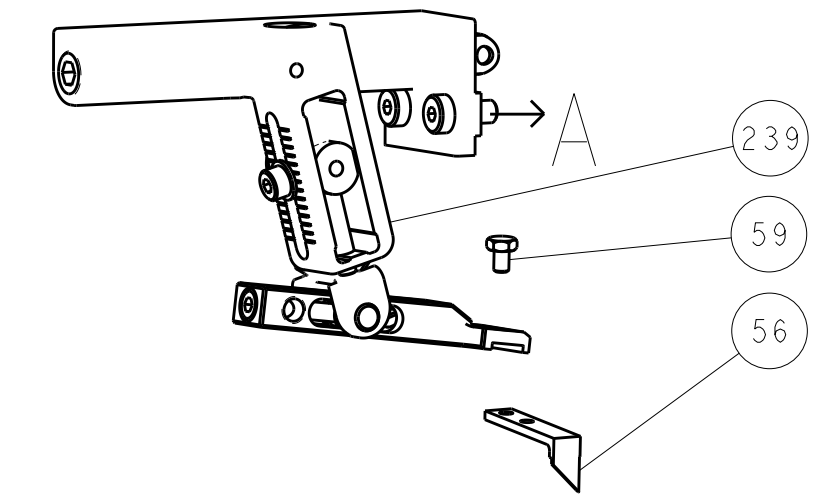




PNEUMATIC

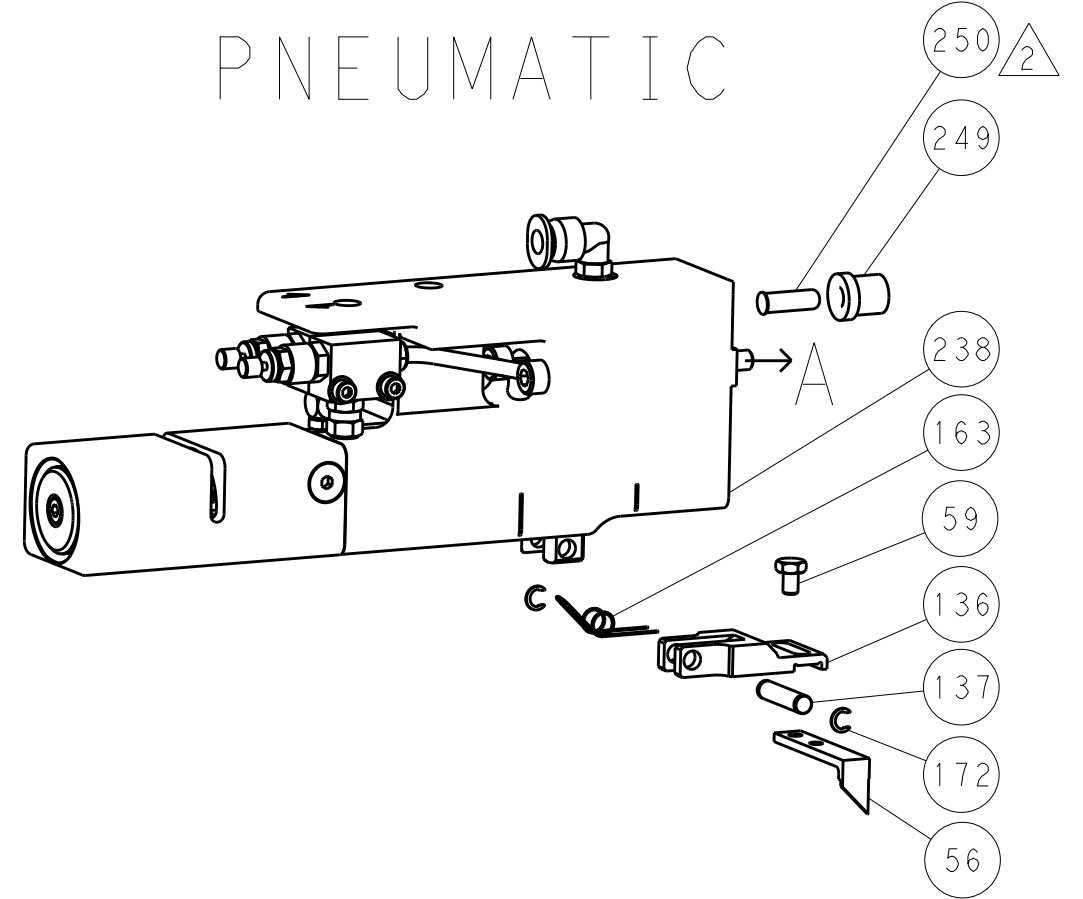


SERVO LATCH PLATE

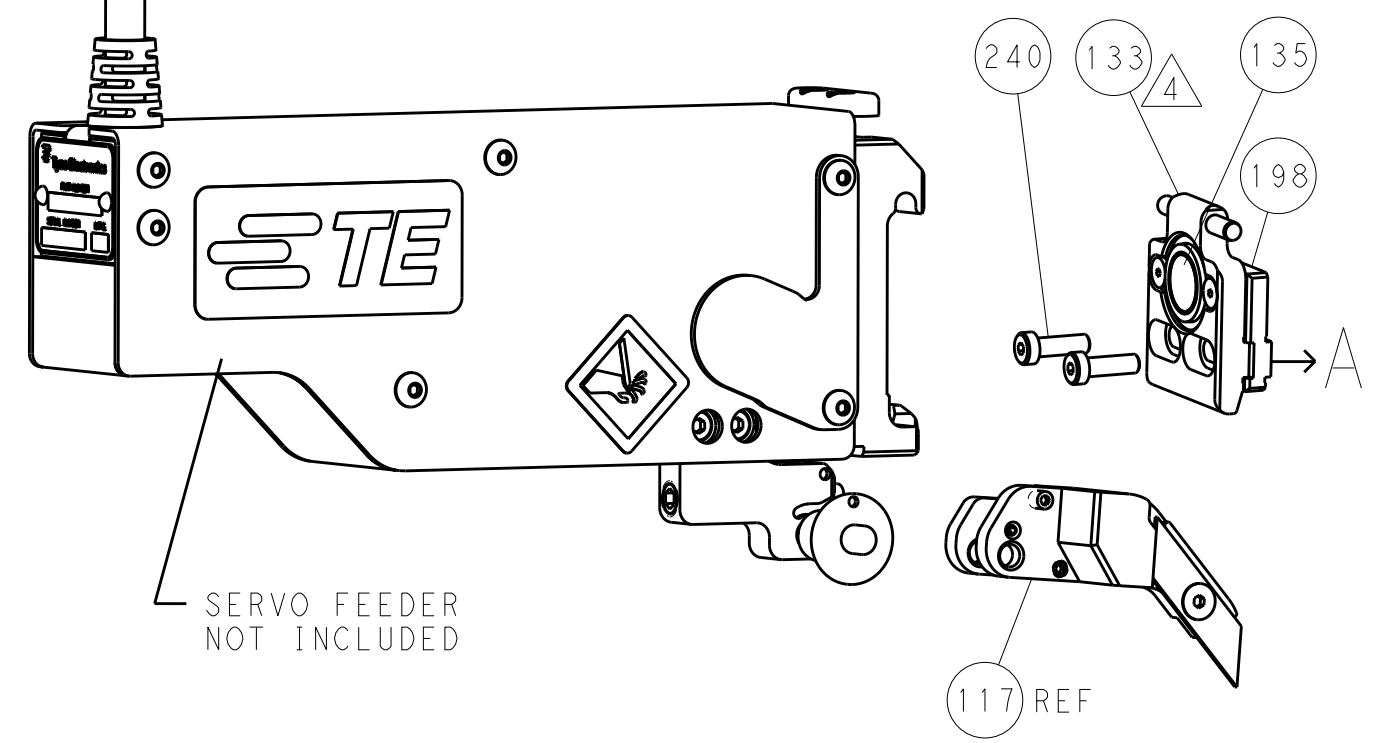


CAM POSITIONS

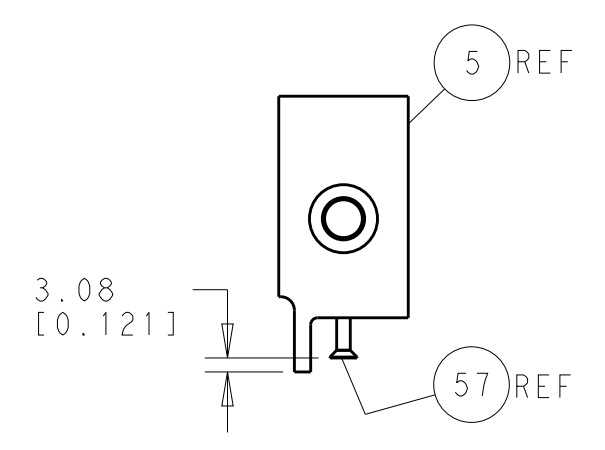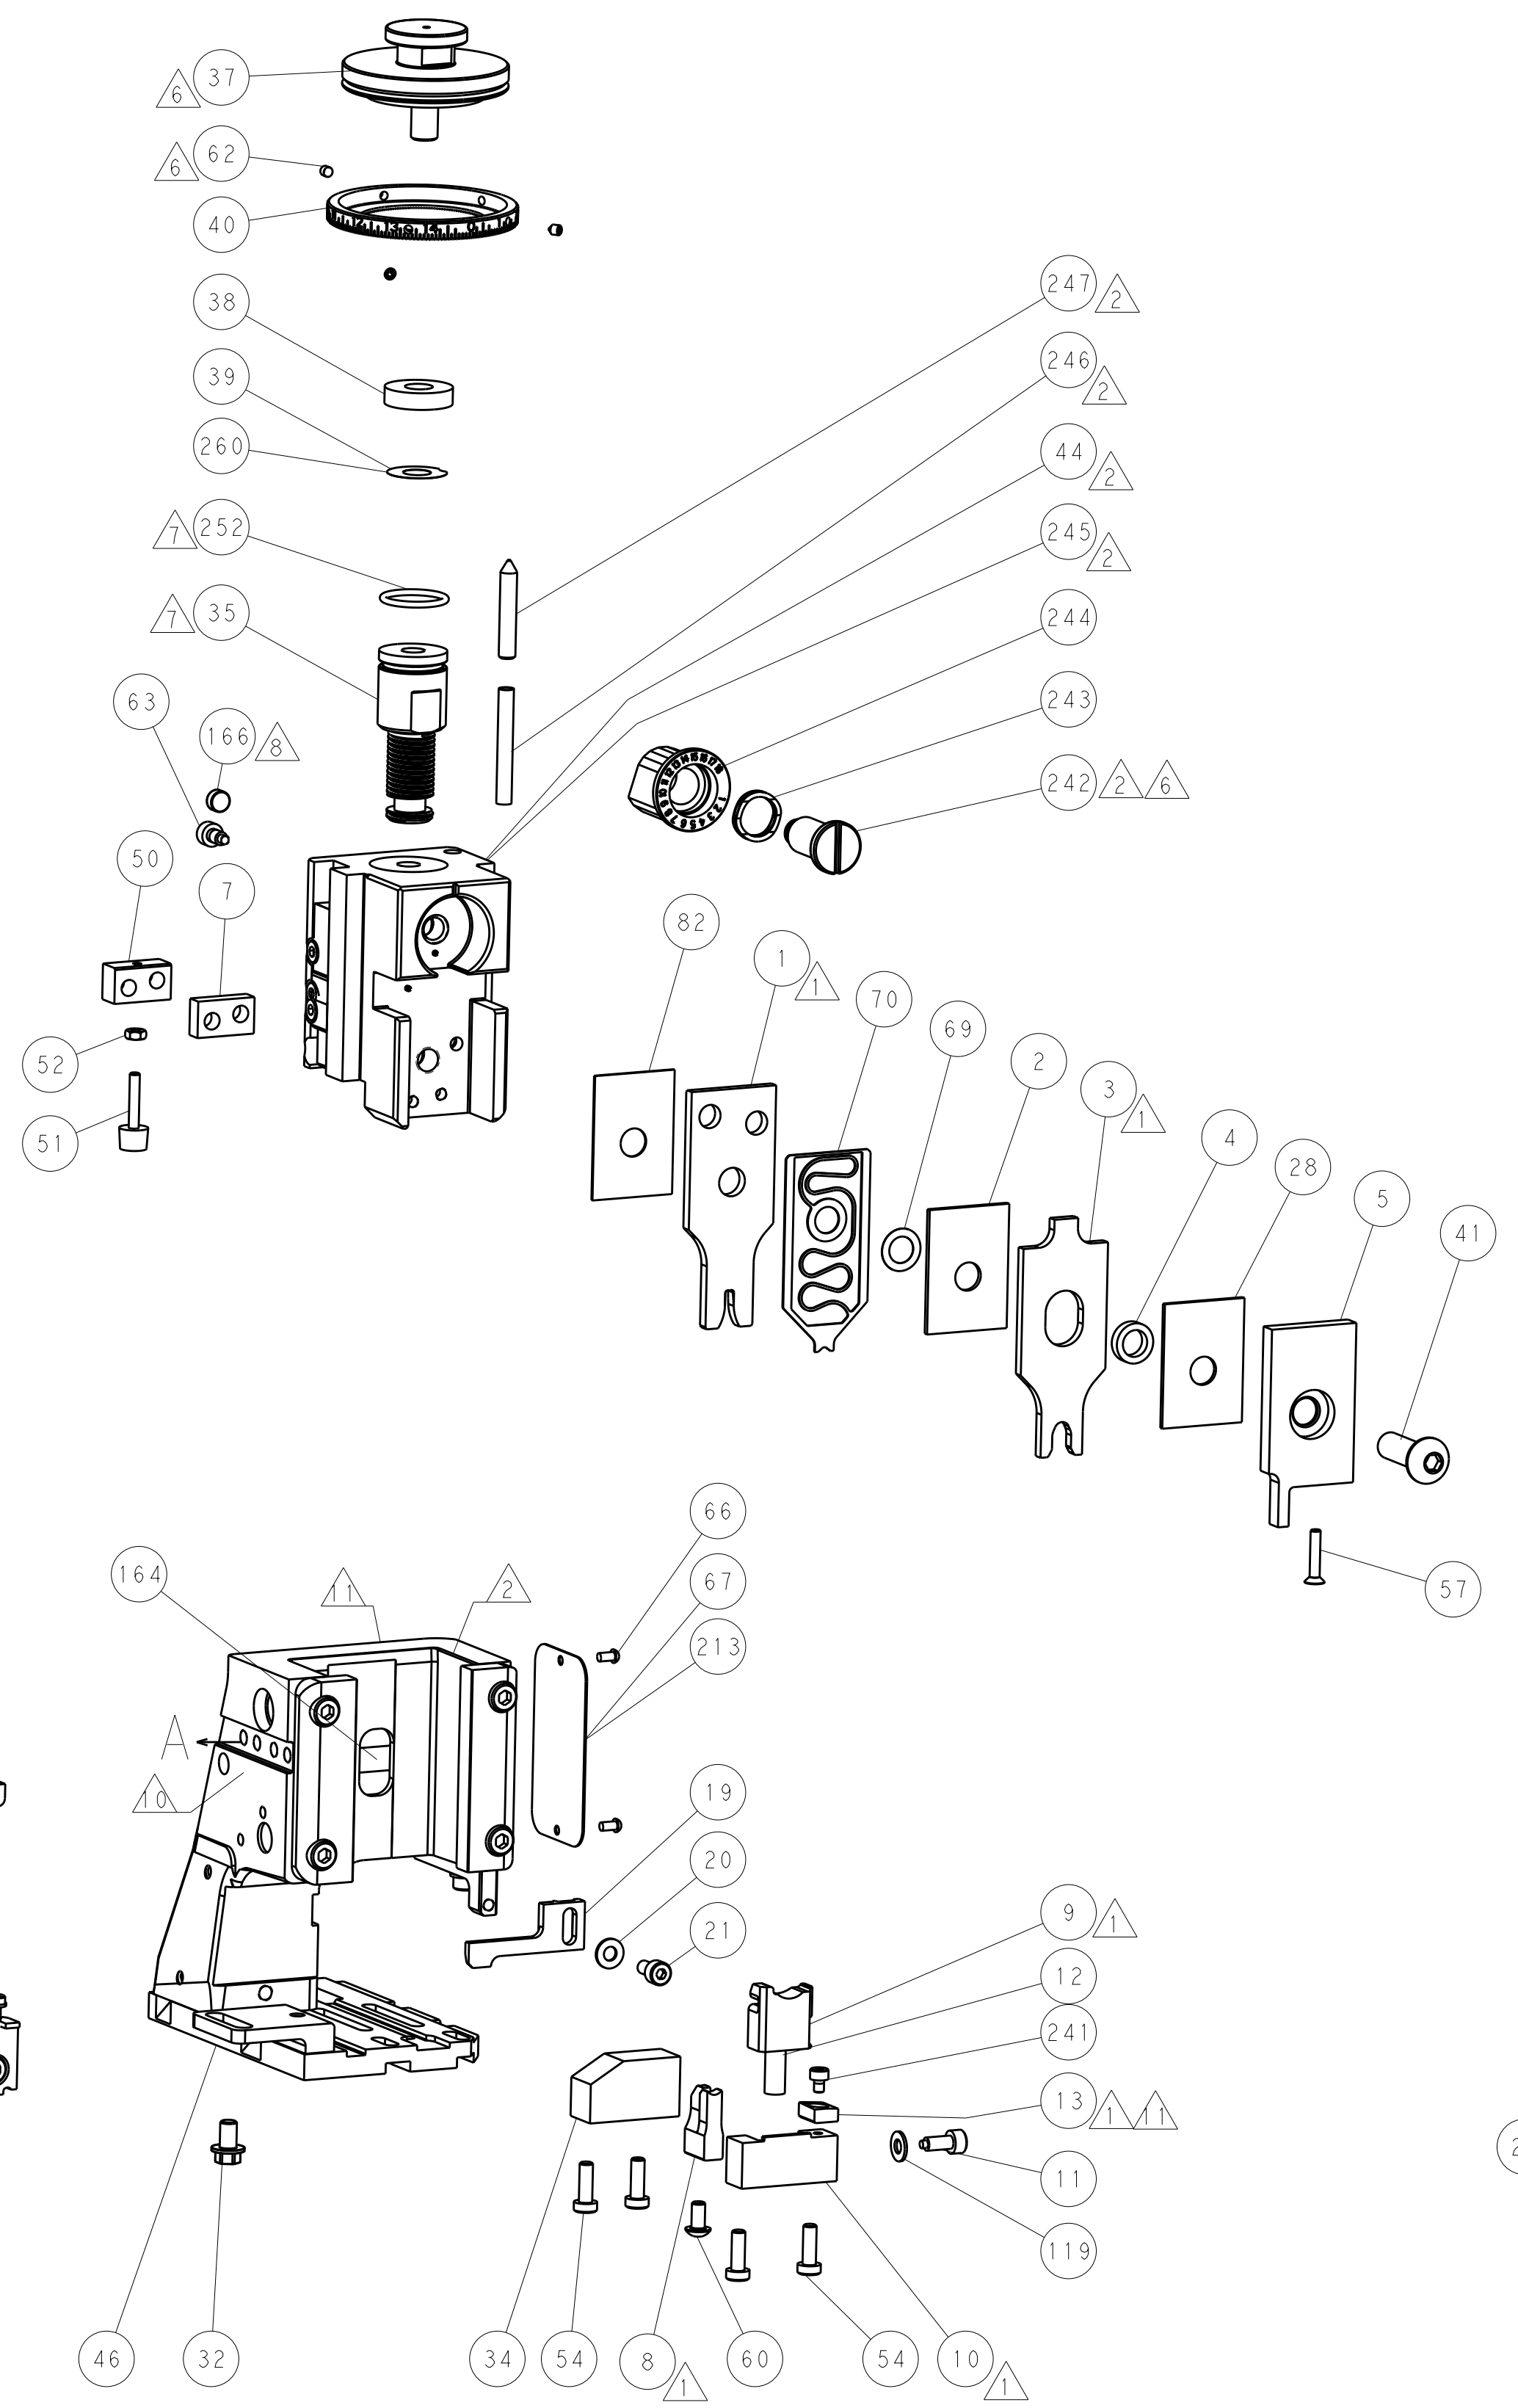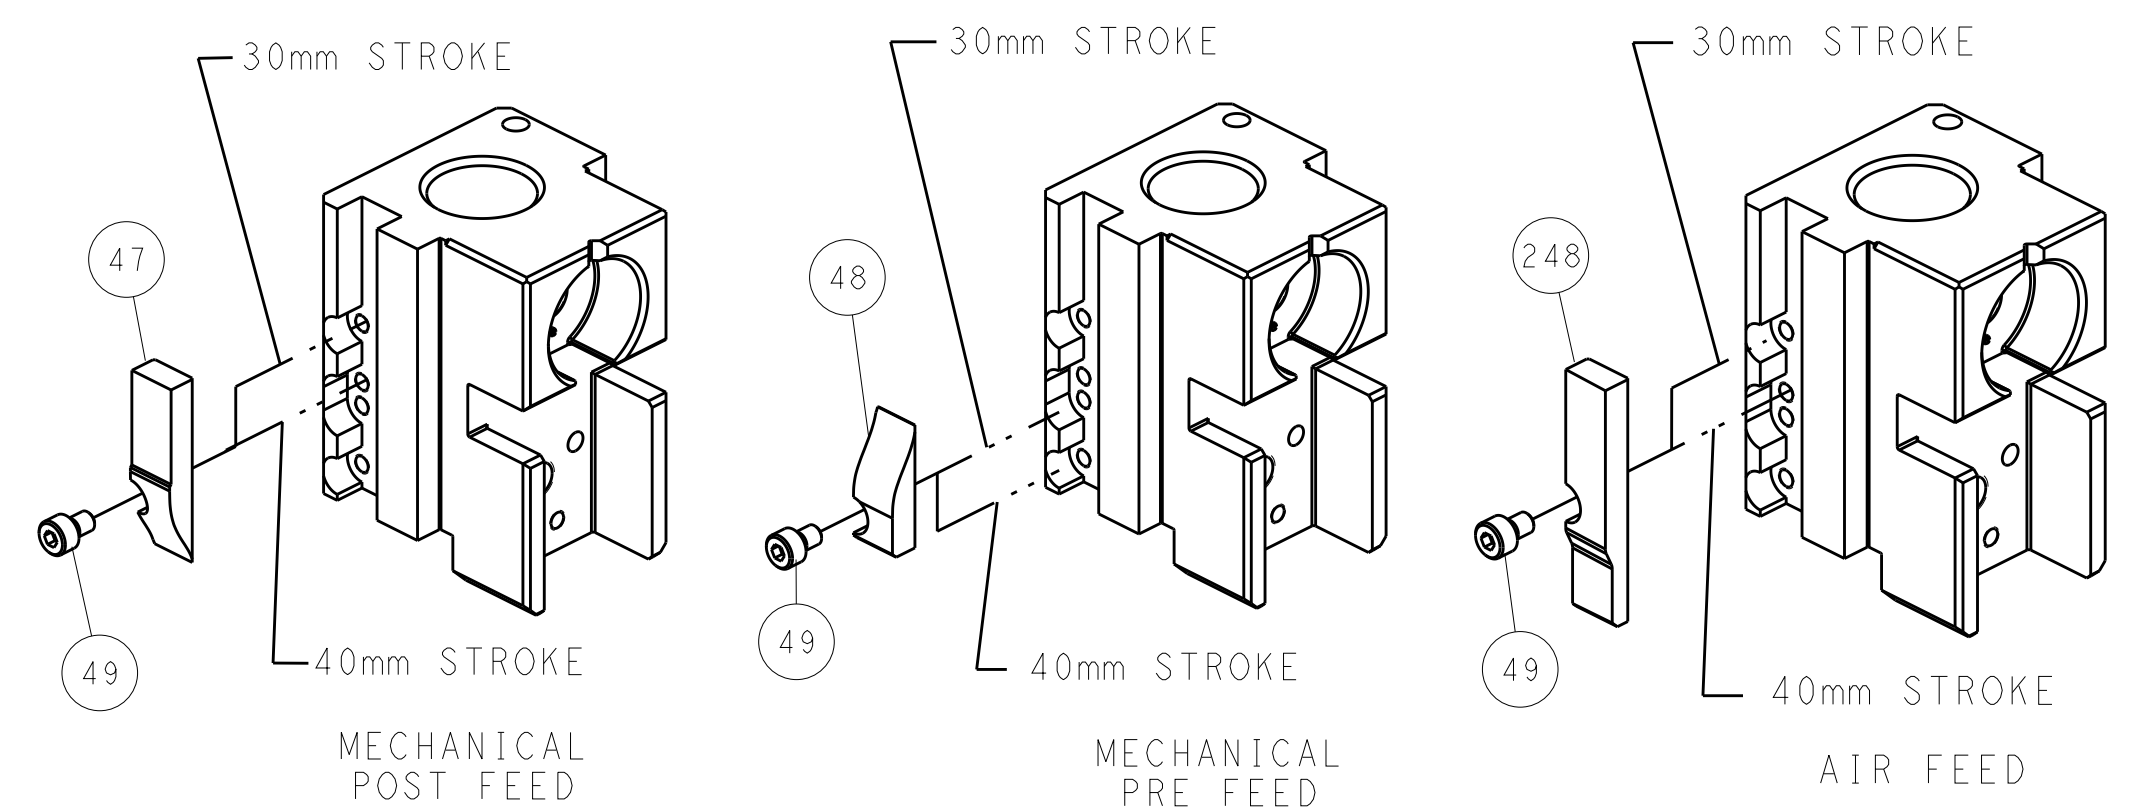

SHEAR DEPRESSOR DETAIL

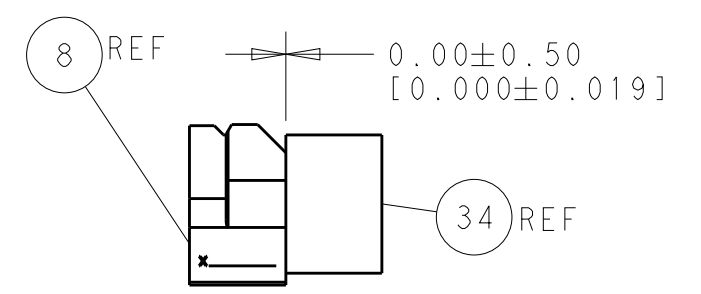

TERMINAL SUPPORT LOCATION

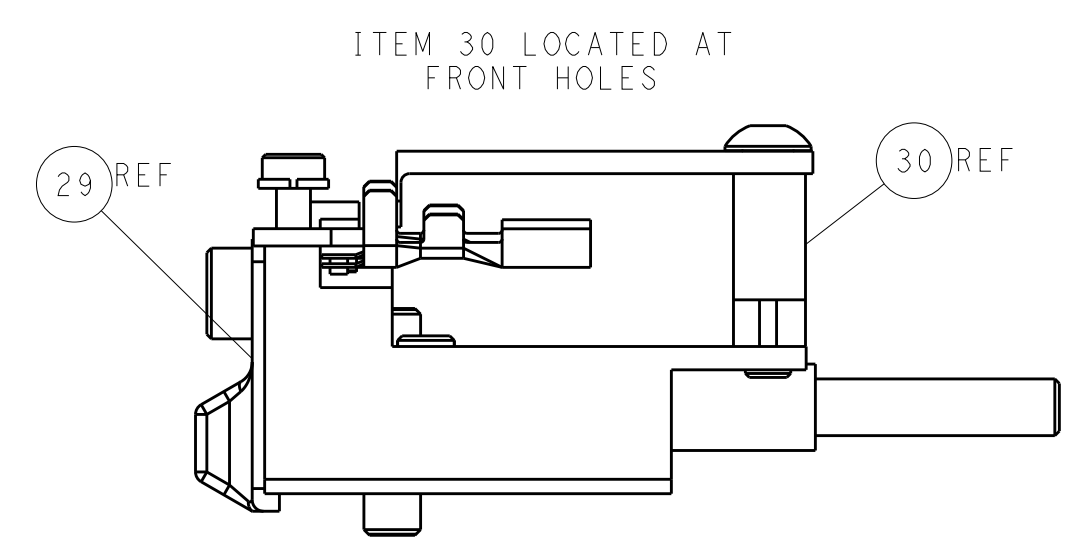

FEED TRACK POSITION GUIDE BY INSULATION BARREL

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. ANY CHANGES TO THIS DRAWING SHALL BE CONTACTED FOR THE LATEST REVISION.				DWN: K. HUANG 31JAN2013				TE Connectivity Harrisburg, PA 17105-3608			
CHK: S. XI 31JAN2013				NAME: Ocean Side Feed Applicator				SIZE: A1			
APVD: S. XI 31JAN2013				CAGE CODE: 00779				DRAWING NO: 2151576			
PRODUCT SPEC: -				RESTRICTED TO: -				SCALE: 1:1			
APPLICATION SPEC: -				SHEET: 2 OF 4				REV: A			
MATERIAL: -				Customer Accessible Production Drawing							


6	-	1	1	1	1	2119083-1	RETAINER, INSULATION DIAL	242
	-	1	1	1	1	7-18023-7	SCR, SKT HD CAP M3 X 4.0	241
	-	-	2	-	-	2168400-6	SHCS, LOW HEAD, RoHS, M5 X 16	240
	-	-	-	-	1	2119580-1	MECHANICAL FEED ASSEMBLY	239
	-	-	-	1	-	2063440-1	AIR FEED MODULE	238
	-	-	1	-	-	2119740-2	TAG, IDENTIFICATION	213
	-	-	1	-	-	1901094-3	SPACER, FEEDER	198
	-	-	-	2	-	21045-3	RING, RETAIN, EXTERN, 3/16 CRESCENT	172
	-	1	1	1	1	994969-1	MAGNET, RARE EARTH HIGH ENERGY	166

-	REF	REF	REF	REF	994970-2	COUNTER, MAGNETIC	164
-	-	-	1	-	240638-1	SPRING, FEED FINGER	163
-	1	1	1	1	8-21084-1	O-RING, .801 ID, .070 DIA. MAT.	152
-	-	-	1	-	2119641-2	FEED CAM, AIR FEED	151
-	1	1	1	1	2119798-2	DETENT PIN	145
-	1	1	1	1	2079383-8	SCR, BHSC, RoHS (M4 X 16)	144
-	4	4	4	4	2168400-5	SHCS, LOW HEAD, RoHS, M4 X 20	143
-	-	-	-	1	2119653-2	FEED CAM, POST FEED	142
-	1	1	1	1	2119656-4	APPLICATOR BASIC ASSEMBLY, SF	141
-	1	1	1	1	2119650-1	RAW ACTION STYLE, SIDE FEED	140

-	-	-	-	-	2119930-1	RAM, ASIAN STYLE, SIDE FEED	140
-	-	-	-	-	2119092-2	BOLT, ADJUSTMENT	139
-	-	-	-	-	3-23627-7	PIN, RETAIN, GRVD, 3/16 X .854	137
-	-	-	-	-	2119799-1	HOLDER, FEED FINGER, AF	136
-	-	REF	-	-	SEE NOTE 4	MEMORY CHIP, PROGRAMMED	135
-	-	-	-	-	1633743-1	SERVO FEED LATCH ASM	133
-	-	-	-	-	1-18028-2	WASHER, FLAT, REG M4	119
-	-	REF	-	-	2119944-1	FEED FINGER ASSEMBLY, SF	117
-	-	-	-	-	1-690438-0	FRONT STRIP GUIDE	96
-	-	-	-	-	455888-5	SPACER CRIMPER	82

-	1	1	1	1	2119956-1	DOCUMENTATION PACKAGE	71
-	1	1	1	1	2119791-5	DEPRESSOR, WIRE	70
-	1	1	1	1	2119943-1	WASHER, SPACER	69
-	1	-	1	1	2119740-1	TAG, IDENTIFICATION	67
-	2	2	2	2	2168078-1	SCREW, DRIVE, RH, R ₆ HS	66
-	1	1	1	1	2119793-1	LIMITER, ADJUSTMENT BOLT	63
6	-	3	3	3	992763-5	SCR, SET, SOC, CONE POINT, M3 x 4.0	62
-	-	-	1	1	5-18022-5	SCR, HEX HD CAP, M4 x 6.0	59
-	1	1	1	1	985575-5	SCR, FLT SKT HD CAP M3 x 16.0	57

-	-	-	1	1	1338685-1	PAWL, FEED	56
-	2	2	2	2	2168083-8	SCR, SKT HD CAP, RoHS, M4 X 16	53
-	1	1	1	1	5018030-1	NUT, HEX, REG, RoHS, M3	52
-	1	1	1	1	811242-5	BUMPER, HOLD DOWN	51
-	1	1	1	1	690753-2	SPACER, TONKER	50
-	-	-	1	2	18023-9	SCR, SKT HD CAP M4 X 6.0	49
-	-	-	-	1	2119652-1	FEED CAM, PRE FEED	48
-	1	1	1	1	2079383-7	SCR, BHSC, RoHS (M8 X 25)	41
-	1	1	1	1	2119645-1	DISC, NUMBERED FA WIRE ADJUSTMENT	40

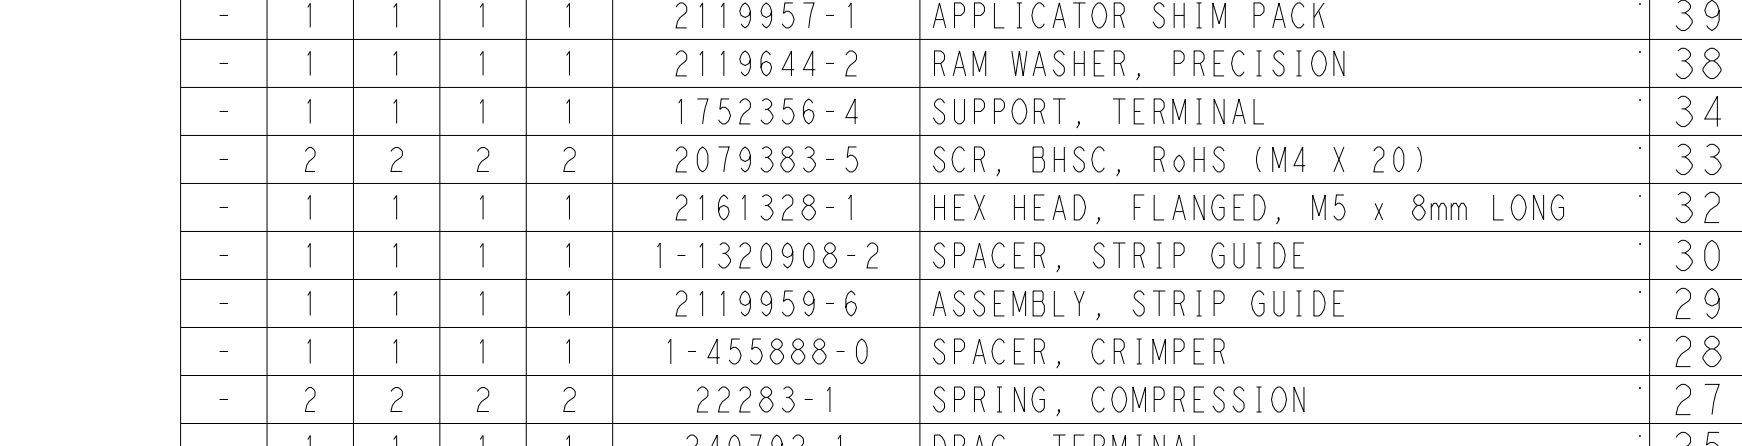

- | | | | | | | | | | |
|---|---|---|---|---|---|------------|---------------------------------|---|----|
| | - | 1 | 1 | 1 | 1 | 240792-1 | DRAG, TERMINAL | 2 | 2 |
| | - | 1 | 1 | 1 | 1 | 1320928-6 | STRIP GUIDE | 2 | 3 |
| | - | 1 | 1 | 1 | 1 | 2168083-2 | SCR, SKT HD CAP, RoHS, M4 X 8.0 | 2 | 2 |
| | - | 1 | 1 | 1 | 1 | 1-18028-2 | WASHER, FLAT, REG M4 | 2 | 20 |
| | - | 1 | 1 | 1 | 1 | 2119533-1 | STRIPPER, SIDE FEED | 2 | 19 |
| 1 | - | 1 | 1 | 1 | 1 | 2119806-1 | INSERT, SHEAR | 2 | 13 |
| | - | 1 | 1 | 1 | 1 | 3-22280-3 | SPRING, COMPRESSION | 2 | 12 |
| | - | 1 | 1 | 1 | 1 | 1-356885-4 | STOP, SHEAR | 2 | 11 |
| 1 | - | 1 | 1 | 1 | 1 | 2119805-2 | SHEAR HOLDER, FRONT | 2 | 10 |
| 1 | - | 1 | 1 | 1 | 1 | 318059-4 | FLOATING SHEAR, FRONT | 2 | 9 |

- | | | | | | | | | |
|---|-----|-----|-----|-----|-----|-------------|-----------------------------|------|
| 1 | 1 | 1 | 1 | 1 | 1 | 3-1333206-5 | ANVIL, COMBINATION .100 | 8 |
| | - | 1 | 1 | 1 | 1 | 7-240641-1 | SPACER | 7 |
| | - | - | - | - | - | - | - | 6 |
| | - | 1 | 1 | 1 | 1 | 2-2119781-2 | DEPRESSOR, SHEAR | 5 |
| | - | 1 | 1 | 1 | 1 | 2-238011-1 | BLOCK, CRIMPER SPACER | 4 |
| 1 | 1 | 1 | 1 | 1 | 1 | 2-1633996-3 | CRIMPER, INSULATION SPECIAL | 3 |
| | - | 1 | 1 | 1 | 1 | 1-455888-2 | SPACER, CRIMPER | 2 |
| 1 | 1 | 1 | 1 | 1 | 1 | 456407-5 | CRIMPER, WIRE PREMIUM | 1 |
| | -77 | -27 | -25 | -22 | -21 | PART NO | DESCRIPTION | ITEM |

- | | | | | |
|---|---|--|------------|---------------|
| PART NO | | DESCRIPTION | | NO |
| <small>(IF DRAWING IS CONNECTED TOUGH FOR ANY ESTIMATE, INFORMATION SHOULD BE CONTACTED FOR THE LATEST REVISION)</small>
DWG 31JAN2013
CHG S.XI 31JAN2013 | |  TE Connectivity
Harrisburg, PA 17105-3608 | | |
| DIMENSIONS: | TOLERANCES UNLESS OTHERWISE SPECIFIED: | NAME | | |
| mm | | Ocean Side Feed Applicator | | |
|  | 0 PLC ±.
1 PLC ±0.1
2 PLC ±0.02
3 PLC ±0.005
4 PLC ±0.0005
ANGLES ±. | PRODUCT SPEC | | |
| | | APPLICATION SPEC | | |
| MATERIAL | FINISH | WEIGHT | SIZE | CAGE CODE |
| - | - | - | A1 | 00779 |
| | | | DRAWING NO | RESTRICTED TO |
| | | | C=2151576 | - |
| Customer Accessible Production Drawing | | | SCALE | SHEET |
| | | | 1:1 | 3 OF 4 REV A |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR THE ELECTRONIC COMPONENTS INDUSTRY. IT IS SUBJECT TO THE SAME LEVEL OF CONTROL AND ENGINEERING OBSERVATION SHOULD BE CONTACTED FOR THE LATEST VERSION.		OWN 31JAN2013 CHK. S. XI 31JAN2013 APVD S. XI 31JAN2013		 TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±: 1 PLC ±0.1 2 PLC ±0.02 3 PLC ±0.005 4 PLC ±0.0005 ANGLES ±°		NAME Ocean Side Feed Applicator -	
		PRODUCT SPEC -		SIZE CASE CODE DRAWING NO RESTRICTED TO A1 00779 C=2151576 -	
MATERIAL FINISH		WEIGHT -		SCALE 1:1 SHEET 3 OF 4 REV A	
Customer Accessible Production Drawing					

SHEETS 1 & 2 ARE NOT REQUIRED FOR PACIFIC VERSION

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2003


A

B


C

D


FEED TYPE MECHANICAL

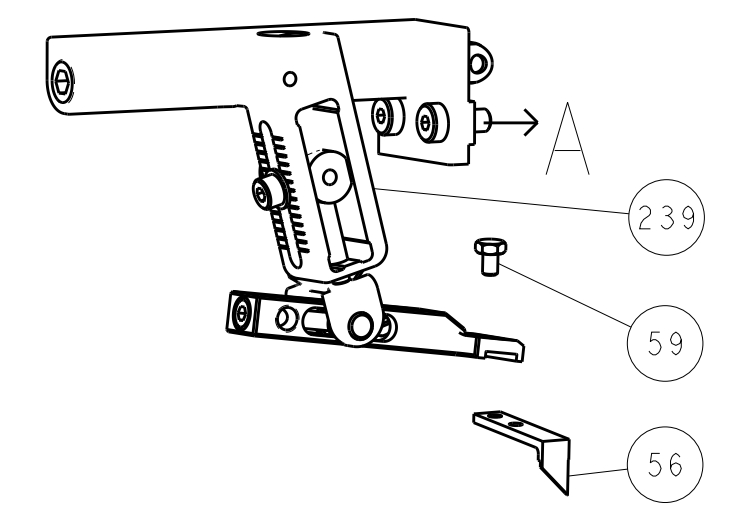




PNEUMATIC

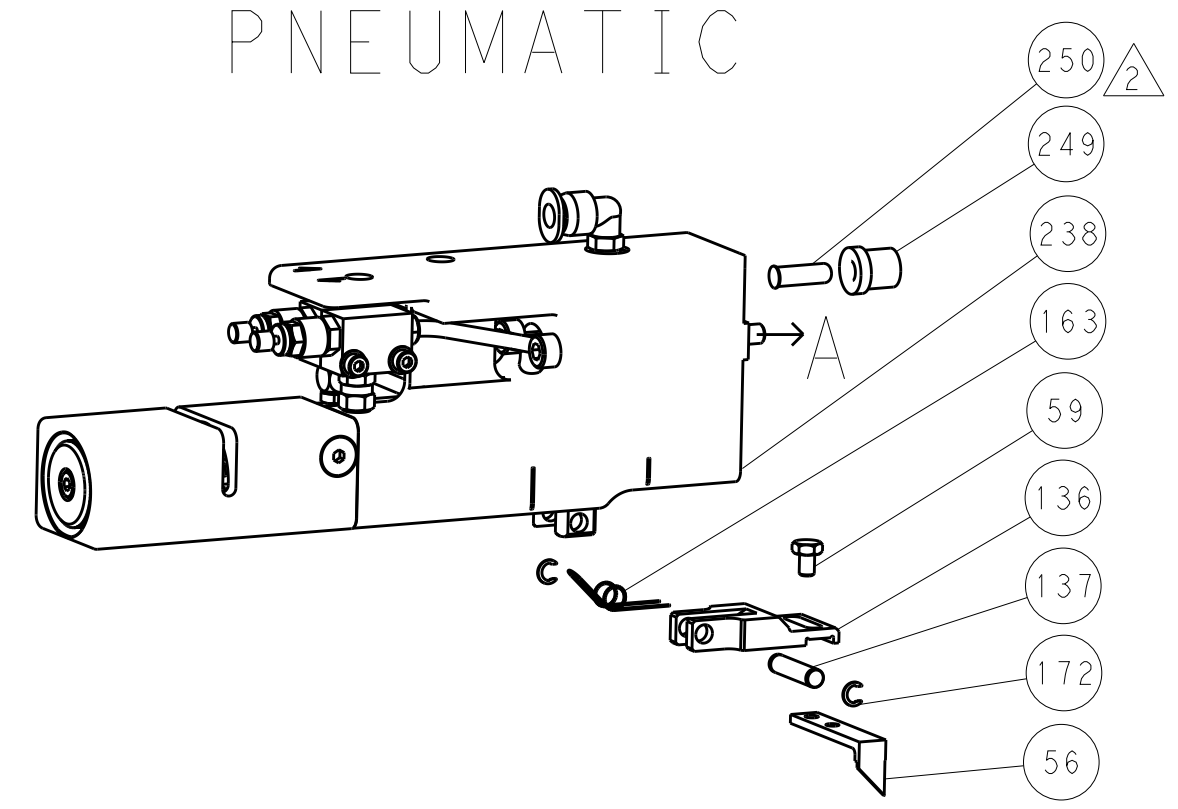


SERVO LATCH PLATE

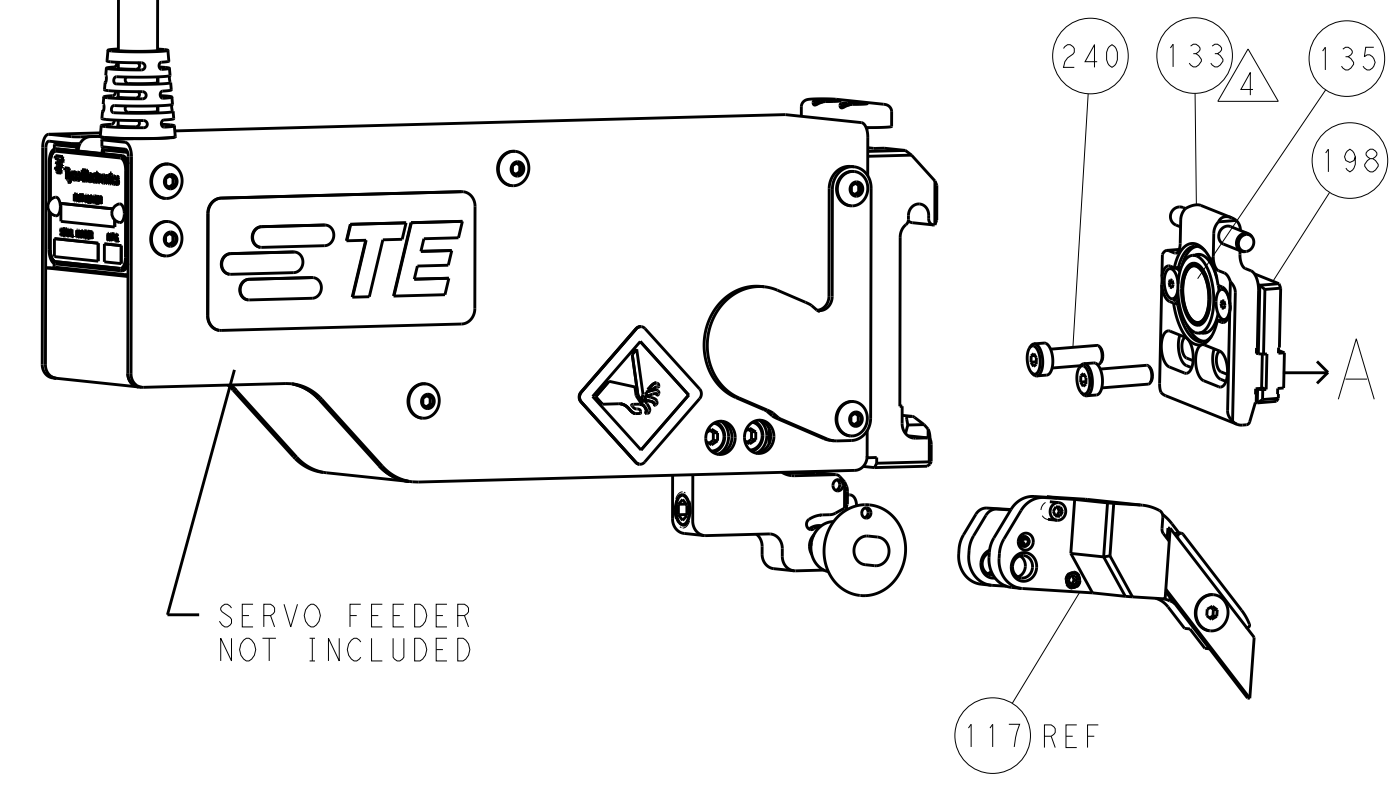


CAM POSITIONS

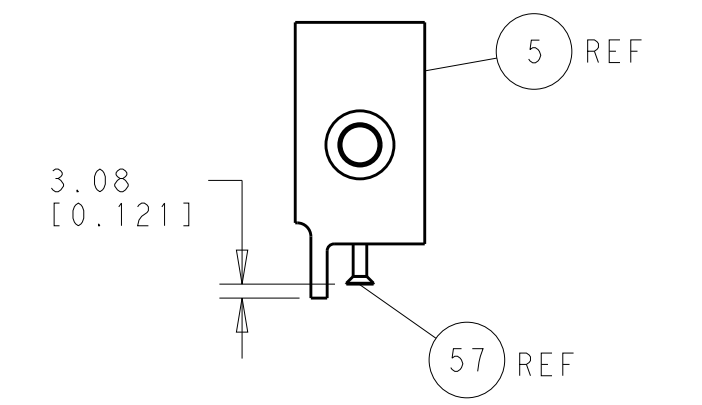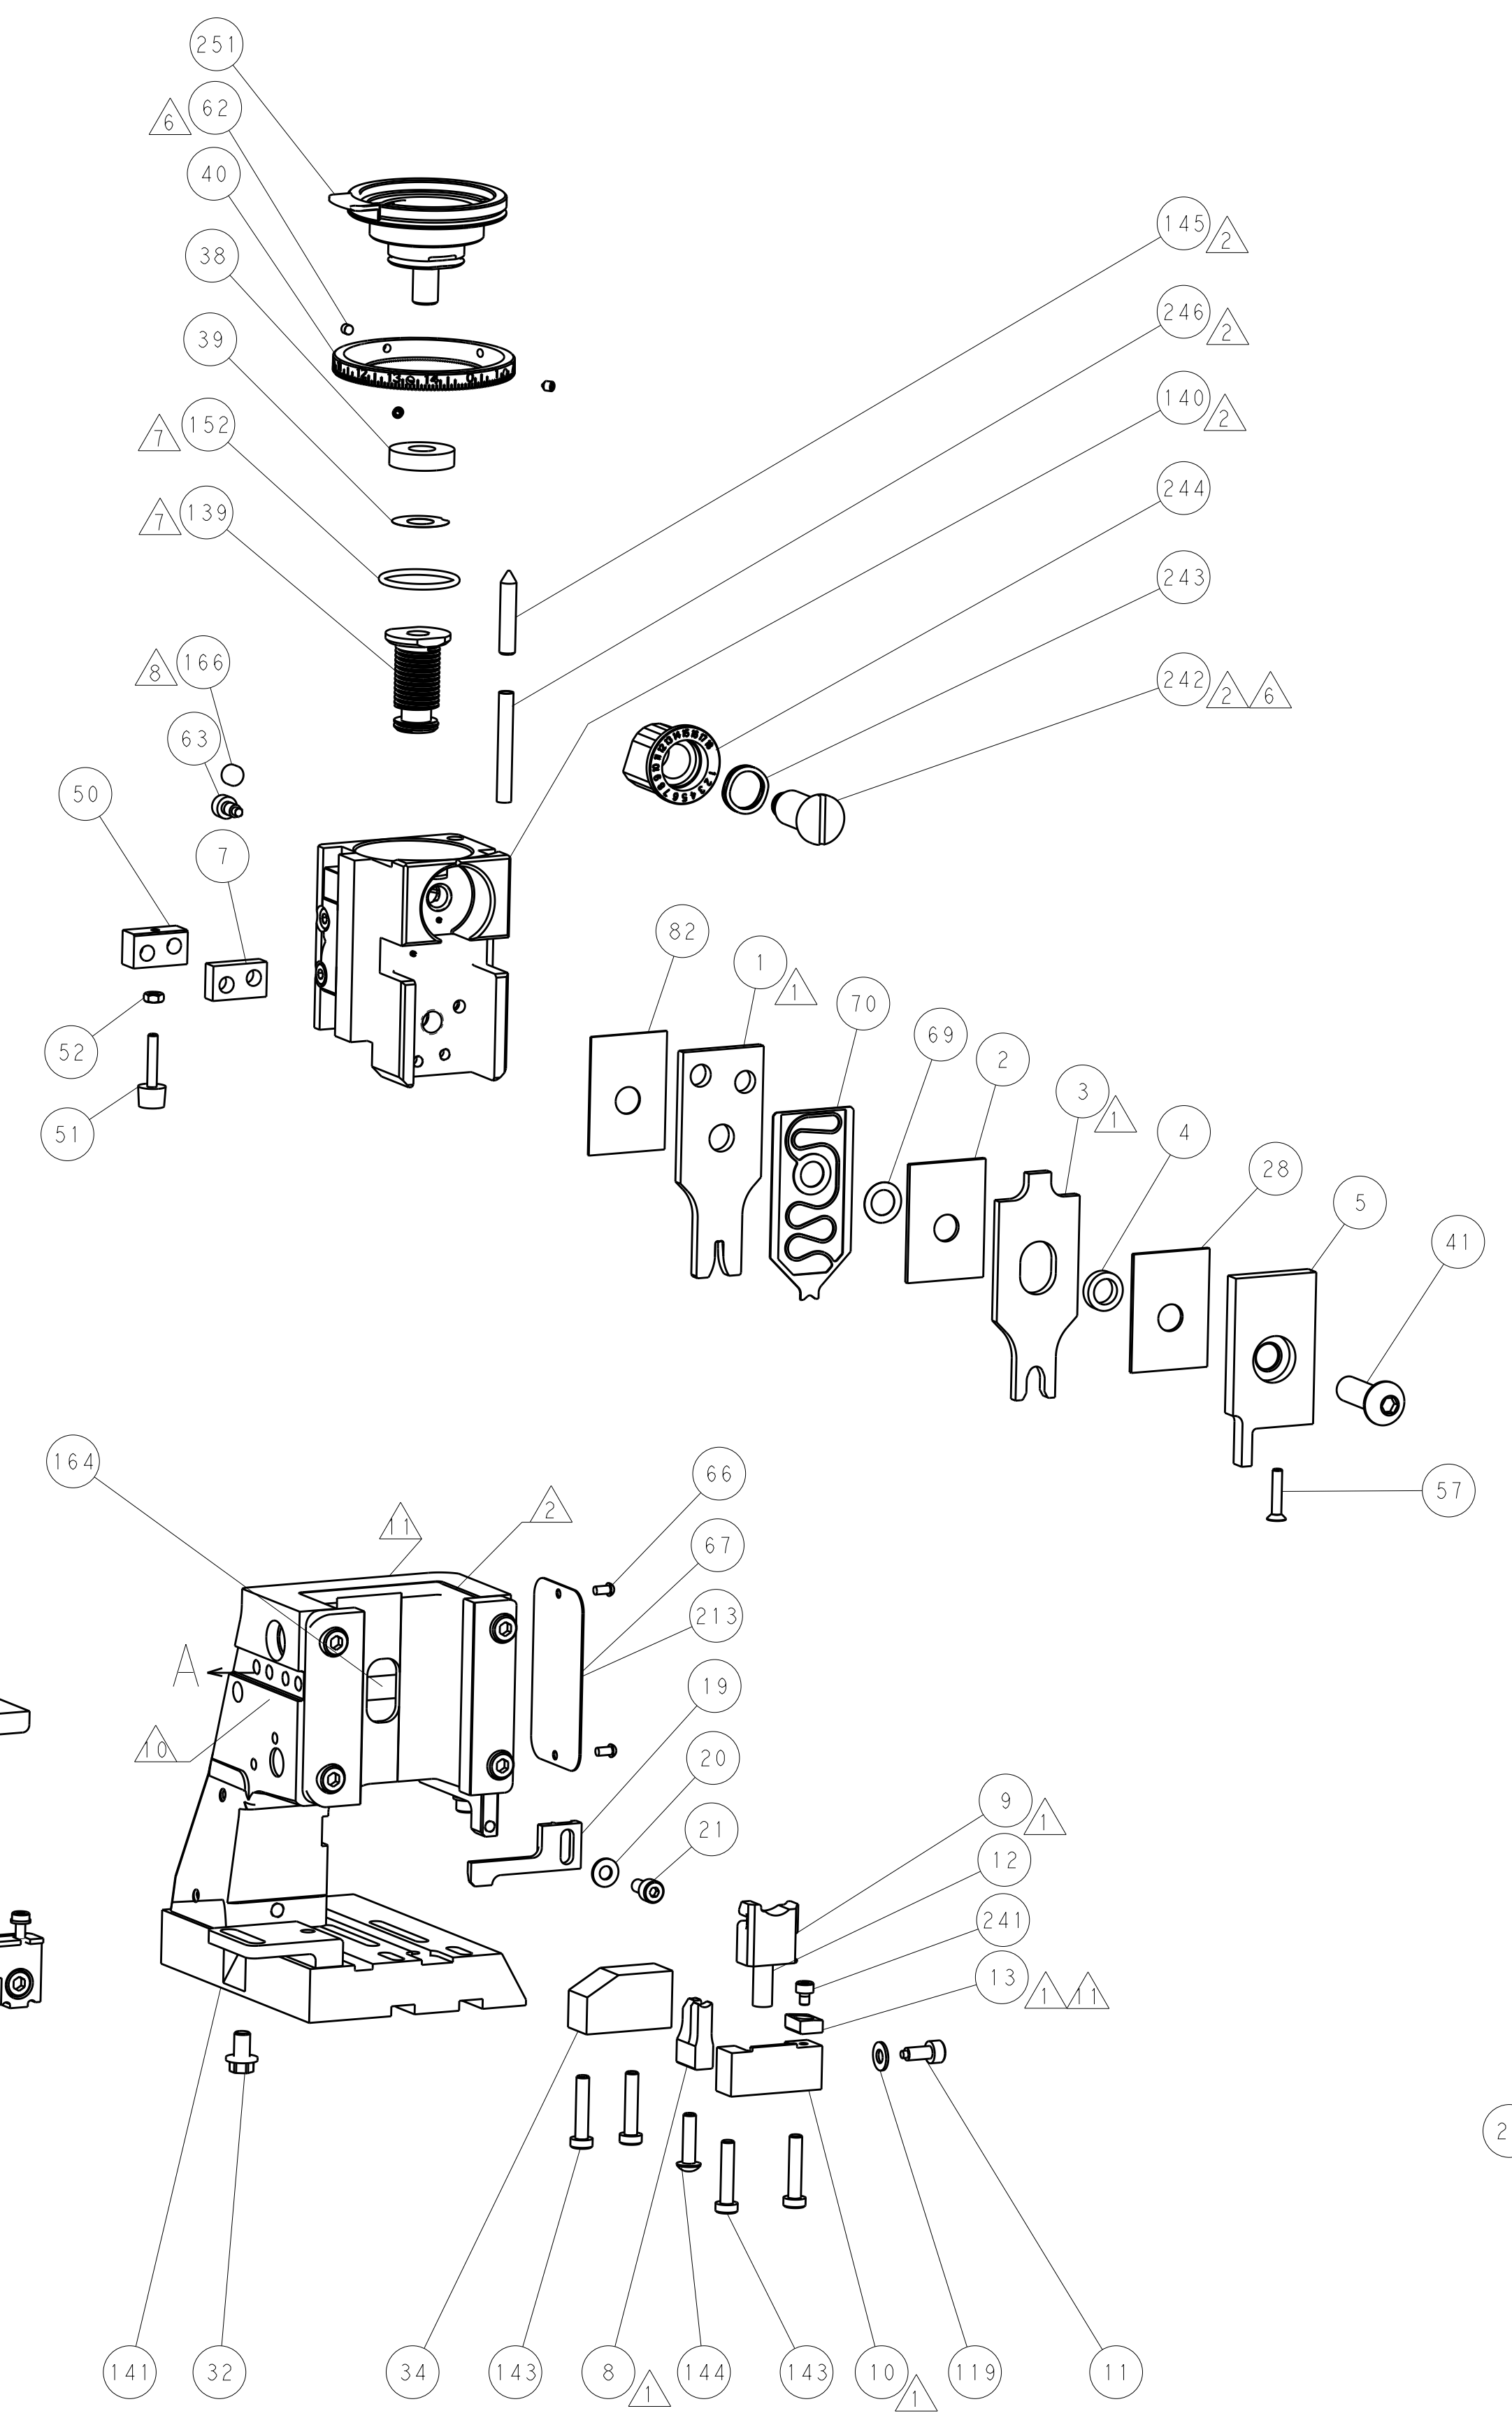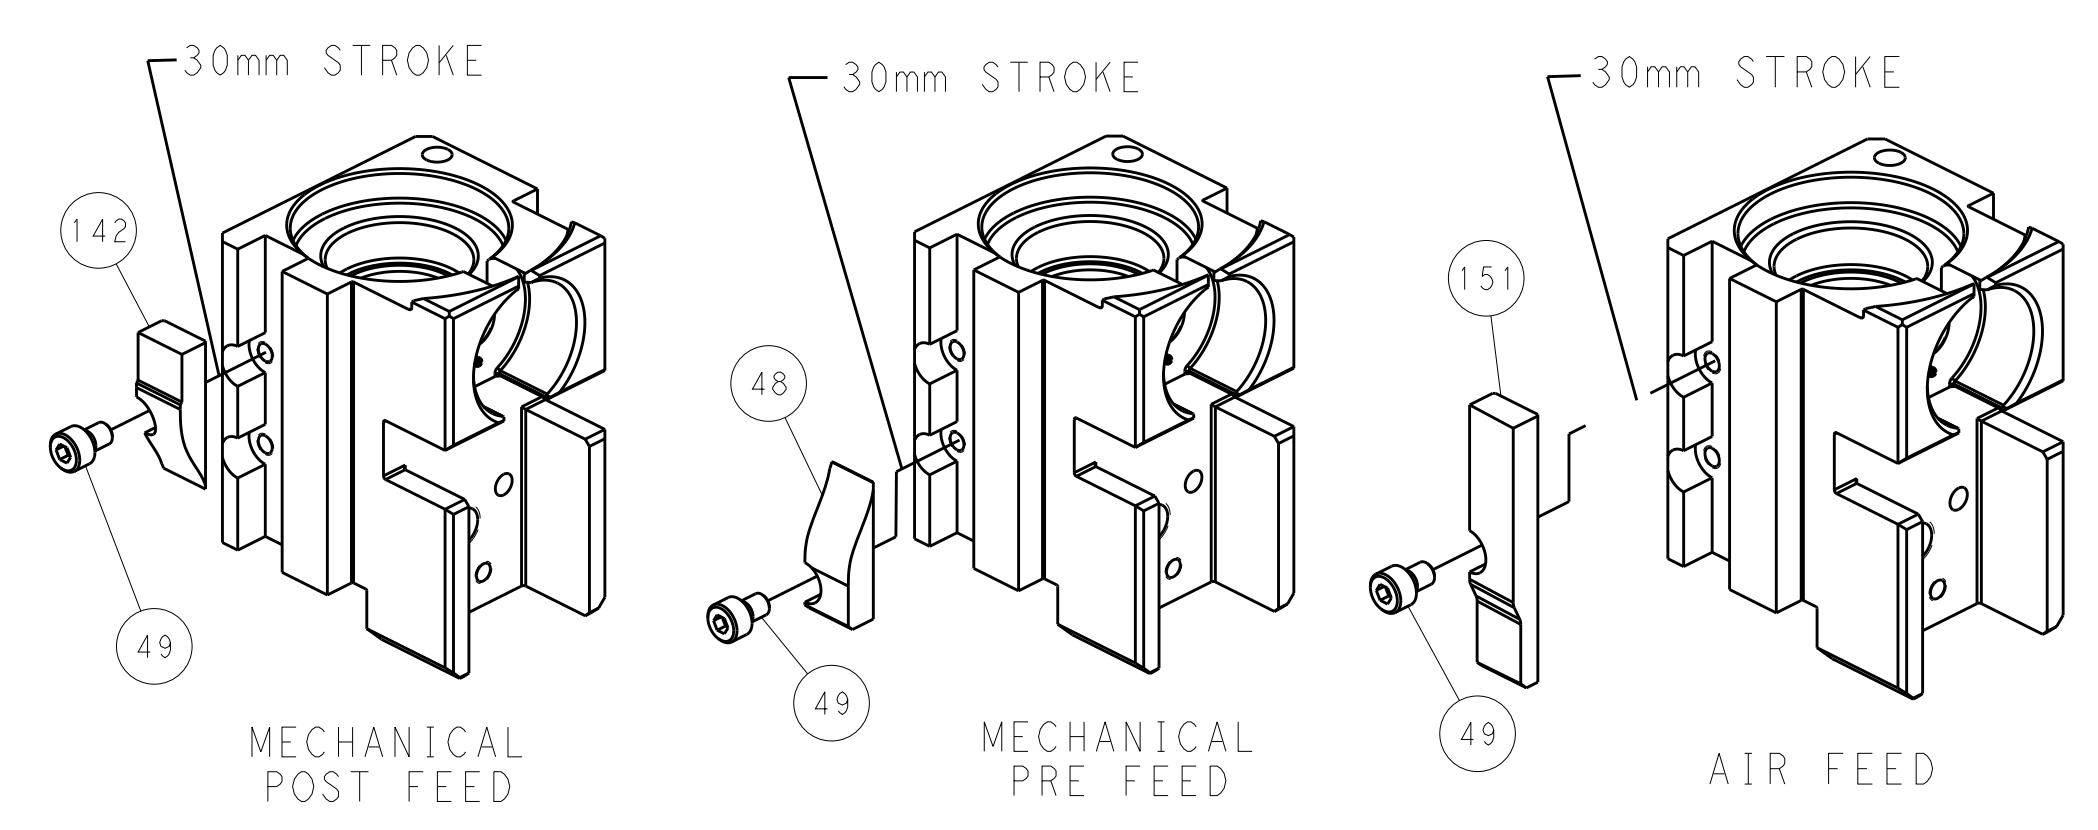

SHEAR DEPRESSOR DETAIL

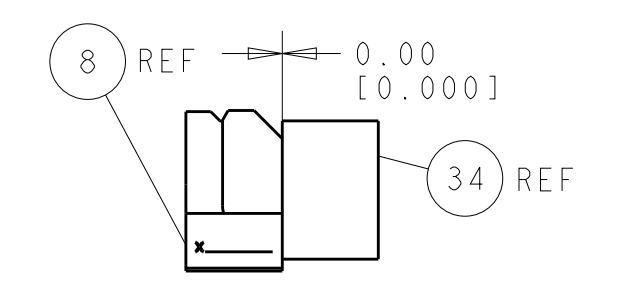

TERMINAL SUPPORT LOCATION

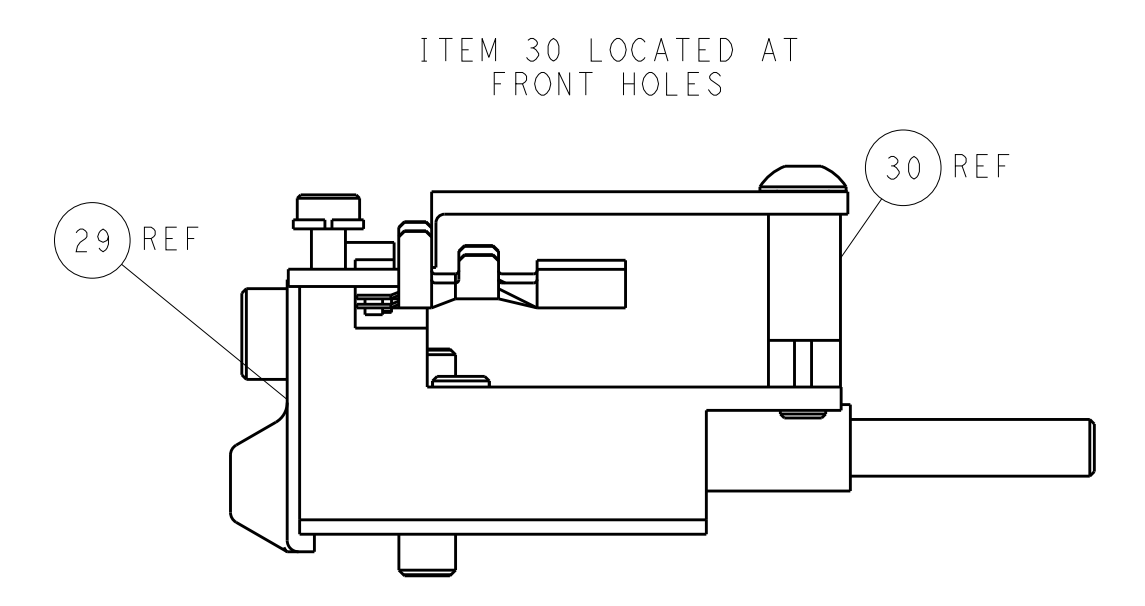

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

THIS DOCUMENT IS UNPUBLISHED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE USER SHALL BE RESPONSIBLE FOR THE LATEST VERSION.		OWN K. HUANG	31JAN2013	STE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK S. XI	31JAN2013	NAME Ocean Side Feed Applicator	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. XI	31JAN2013	PRODUCT SPEC	
0 PLC ±0.1		APPLICATION SPEC		SIZE	
1 PLC ±0.02		WEIGHT		CAGE CODE	
2 PLC ±0.005		SCALE		DRAWING NO	
3 PLC ±0.0005		SHEET		REV	
4 PLC ±0.0005		CUSTOMER ACCESSIBLE PRODUCTION DRAWING		A	
ANGLES FINISH		SCALE		1:1	
MATERIAL		SHEET		4 OF 4	
		REV		A	