I/Q Mixer / Modulator — Model MIQ3xMS-3

Communications Band — RF 3.0 to 6.0 GHz

Electrical Specifications:[1]

Parameter	Conditions RF (GHz)	LO (GHz)	IF (MHz)	Specifications Min	Typical	Max
SSB Conversion loss:[2] [3]	3.0-6.0 3.0-6.0	3.0-6.0 3.0-6.0	DC-100 DC-300		5.5 dB 6.5 dB	7.5 dB 8.5 dB
Image Rejection Side-band Suppression:[4]	3.0-6.0	3.0-6.0	DC-300	20 dB	28 dB	
Amplitude Match	3.0-6.0	3.0-6.0	DC-300		0.1 dB	
Phase Match	3.0-6.0	3.0-6.0	DC-300		2.5 deg	
Isolation						
LO to RF:		3.0-6.0		25 dB	31 dB	
LO to I/Q:		3.0-6.0		25 dB	33 dB	
RF to I/Q:	3.0-6.0				50 dB	
I/Q to RF:			DC-300		40 dB	
Input 1 dB Compression Point:	3.0-6.0	3.0-6.0	DC-300		+5 dBm +8 dBm +12 dBm	MIQ34 MIQ36 MIQ37
Input Third Order Intercept Point:	3.0-6.0	3.0-6.0	DC-300		+14 dBm +17 dBm +21 dBm	MIQ34 MIQ36 MIQ37
LO Power:[5]	3.0-6.0	3.0-6.0	DC-300		+10 dBm +13 dBm +17 dBm	MIQ34 MIQ36 MIQ37


Model MIQ3xMS-3

LO Power
4 = +10 dBm
6 = +13 dBm
7 = +17 dBm

Notes:
1. Specifications are guaranteed when tested as a downconverter in a 50 Ohm system at +25˚C with the nominal LO power. Specifications indicated as typical are not guaranteed.
2. Noise figure is typically within ±0.5 dB of conversion loss for IF frequencies greater than 10 MHz.
3. Conversion loss typically degrades less than 0.5 dB at +100˚C and improves less than 0.5 dB at -55˚C. Conversion loss is the combined value.
4. Measured with an IF quadrature hybrid whose amplitude and phase errors are 0.5 dB and 3 degrees maximum.
5. Usable LO drives are up to 2 dB below to 3 dB above nominal.
6. See Application notes M112, for aid in selecting the outline and for mounting and installation information.


MIQ3xMS-3

Outline: MSQ7

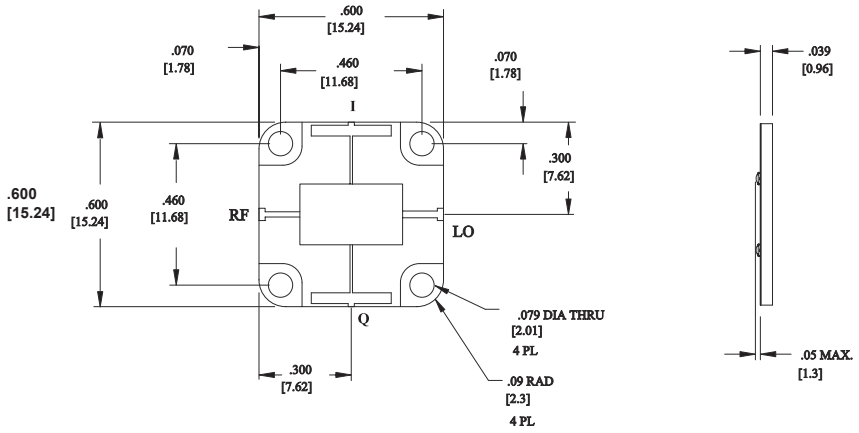

All dimensions are in inches and [mm].

Typical Performance at 25˚C

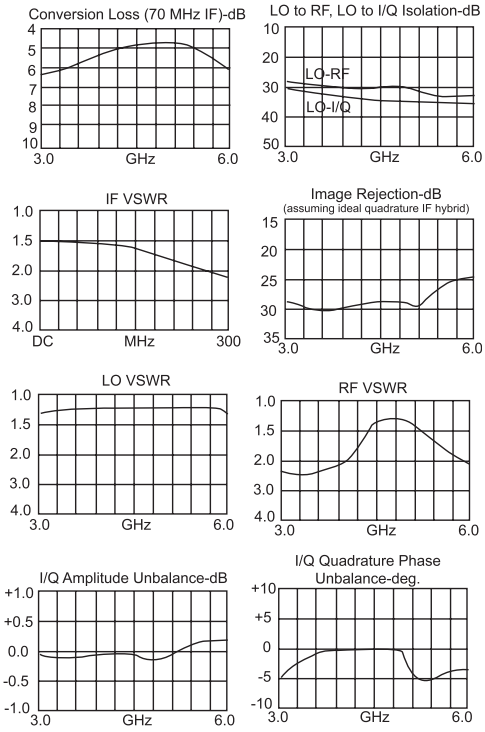

Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, FL 32905 · PH (888) 553-7531 · Fax (888) 553-7532

www.SpectrumMicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, PA 19154 · PH (215) 464-4000 · Fax (215) 464-4001