GENERAL DESCRIPTION

The CM2862 family is a positive voltage linear regulator developed utilizing CMOS technology featured low quiescent current (30µA typ.), low dropout voltage, and high output voltage accuracy. Built-in low on-resistance transistor provides low dropout voltage and large output current. A 2.2µF or greater can be used as an output capacitor.

The SOT-89 packages are attractive for “Pocket” and “Hand Held” applications.

These robust devices are designed to prevent device failure under the worst operation condition with both Thermal Shutdown and Current Fold-back.


FEATURES

- Very Low Dropout Voltage
- Low Current Consumption: Typ. 30µA, Max. 35µA
- High Accuracy Output Voltage: +/- 1.5%
- Guaranteed 600mA Output
- Thermal Shutdown
- Current Limiting
- Compact Package: SOT-89
- Factory Pre-set Output Voltages
- Short Circuit Current Fold-Back
- Low Temperature Coefficient

APPLICATIONS


- Battery-powered devices
- Personal communication devices
- Home electric/electronic appliances
- PC peripherals

TYPICAL APPLICATIONS

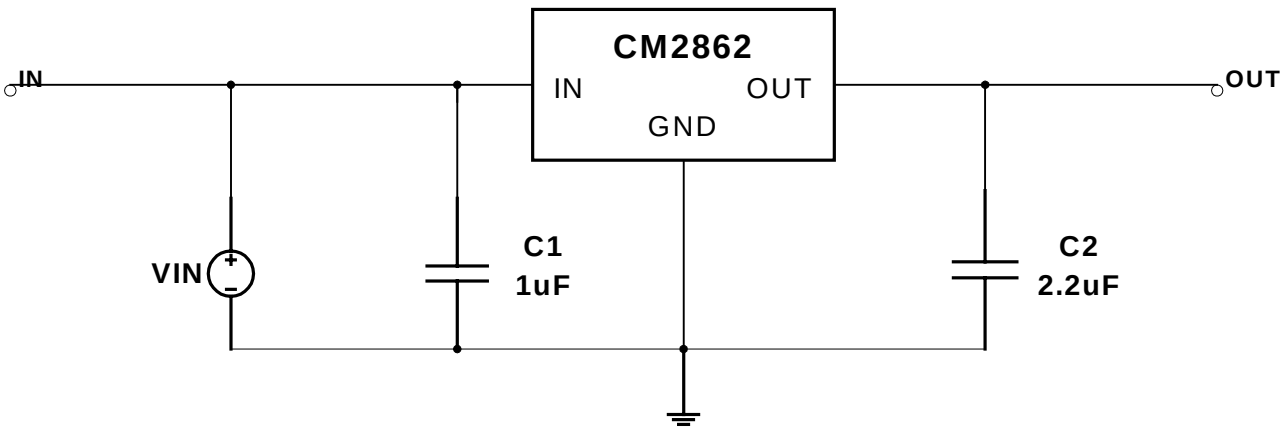


PIN CONFIGURATION

SOT-89
Top View



	2862
Pin 1	VOUT
Pin 2	GND
Pin 3	VIN

BLOCK DIAGRAM

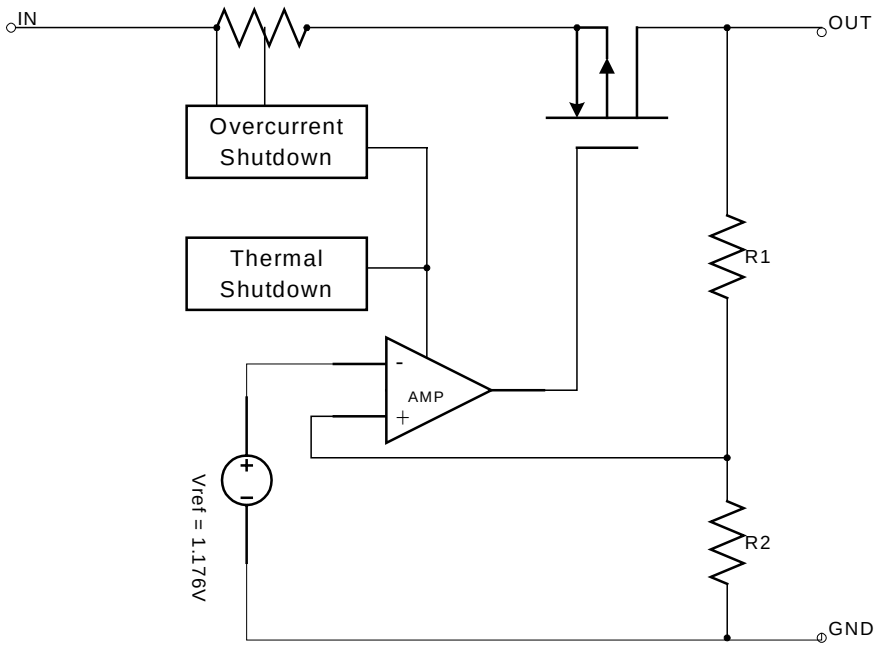

ORDERING INFORMATION

Part Number	Output Voltage	Temperature Range	Package
CM2862KIM89	2.5V	-40℃ ~ +85℃	SOT-89
CM2862SIM89	3.3V	-40℃ ~ +85℃	SOT-89

Note: For other pre-set output voltage, please contact Champion Sales office.

ABSOLUTE MAXIMUM RATINGS

Input Voltage ..... +7V
Output Current 1A
Output Voltage ..... GND-0.3V to V_{IN}+0.3V
ESD Classification ..... B

OPERATING RATINGS

Supply Voltage ..... 4.5V to 5.5V
Ambient Temperature Range (T_A) ..... -40℃ to +85℃
Junction Temperature Range ..... -40℃ to +125℃

THERMAL INFORMATION

Parameter		Maximum	Unit
Thermal Resistance (Θ_{jc})	SOT-89	100	℃/W
Thermal Resistance (Θ_{ja})	SOT-89	180	℃/W
Internal Power Dissipation (P_D) (ΔT = 100℃, No Heatsink)	SOT-89	400	mW
Maximum Junction Temperature		150	℃
Maximum Lead Temperature (10 Sec)		300	℃

ELECTRICAL CHARACTERISTICS

T_A = +25℃; V_{IN} = $V_{IN(MIN)}$ unless otherwise noted

Parameter	Symbol	Test Conditions		CM2862 Min.	CM2862 Typ.	CM2862 Max.	Unit
Input Voltage	V_{IN}			Note 1		7	V
Output Voltage Accuracy	V_{OUT}	I_O = 1mA		-1.5		1.5	%
Dropout Voltage	$V_{DROPOUT}$	I_O = 600mA, V_{OUT}=$V_{O(NOM)}$-1.5%,	1.5V<$V_{O(NOM)}$<=2.0V			1000	mV
			2.0V<$V_{O(NOM)}$<=2.8V			800	
			2.8V<$V_{O(NOM)}$<3.8V			600	mV
Output Current	I_O	V_{OUT} > 1.2V		600			mA
Current Limit	I_{LIM}	V_{OUT} > 1.2V, V_{IN} = $V_{IN(MIN)}$		600	1000		mA
Short Circuit Current	I_{SC}	V_{OUT} < 0.8V			250		mA
Quiescent Current	I_Q	I_O = 0mA			30	50	μA
Ground Pin Current	I_{GND}	I_O = 1mA to 600mA			30	50	μA
Line Regulation	REG_{LINE}	I_{OUT}=5mA, V_{IN}=V_{OUT}+1 to V_{OUT}+2	V_{OUT} <= 2.0V			0.15	%
			V_{OUT} > 2.0V		0.02	0.1	%
Load Regulation	REG_{LOAD}	I_O=1mA to 600mA			0.2	1	%
Over Temperature Shutdown	OTS				150		℃
Over Temperature Hystersis	OTH				30		℃
V_{OUT} Temperature Coefficient	TC				30		ppm/℃
Power Supply Rejection	PSRR	I_O = 100mA C_O=2.2μF ceramic	f=1kHz		50		dB
			f=10kHz		20		
			f=100kHz		15		
Output Voltage Noise	eN	f=10Hz to 100kHz I_O = 10mA, C_{VBG}=0μF	C_O=2.2μF		30		μVrms
			C_O=100μF		20		

Note 1. $V_{IN(MIN)}$ = V_{OUT} + $V_{DROPOUT}$
Note 2. As V_{IN} is larger than $V_{IN(MIN)}$, the Current Limit and output short current Spec value will increase

DETAILED DESCRIPTION

The CM2862 family of CMOS regulators contain a PMOS pass transistor, voltage reference, error amplifier, over-current protection, thermal shutdown, and short circuit protection.

The P-channel pass transistor receives data from the error amplifier, over-current shutdown, short output protection, and thermal protection circuits. During normal operation, the error amplifier compares the output voltage to a precision reference. Over-current and Thermal shutdown circuits become active when the junction temperature exceeds 150℃, or the current exceeds 600mA. During thermal shutdown, the output voltage remains low. Normal operation is restored when the junction temperature drops below 120℃.


The CM2862 switches from voltage mode to current mode when the load exceeds the rated output current. This prevents over-stress. The CM2862 also incorporates current fold-back to reduce power dissipation when the output is short-circuited. This feature becomes active when the output drops below 0.8V, and reduces the current flow by 65%. Full current is restored when the voltage exceeds 0.8V.

EXTERNAL CAPACITOR


The CM2862 is stable with an output capacitor to ground of 2.2µF or greater. It can keep stable even with higher or poor ESR capacitors. A second capacitor is recommended between the input and ground to stabilize VIN. The input capacitor should be larger than 0.1µF to have a beneficial effect. All capacitors should be placed in close proximity to the pins. A “quiet” ground termination is desirable.

TYPICAL ELECTRICAL CHARACTERISTICS


Ground Current vs. Input Voltage

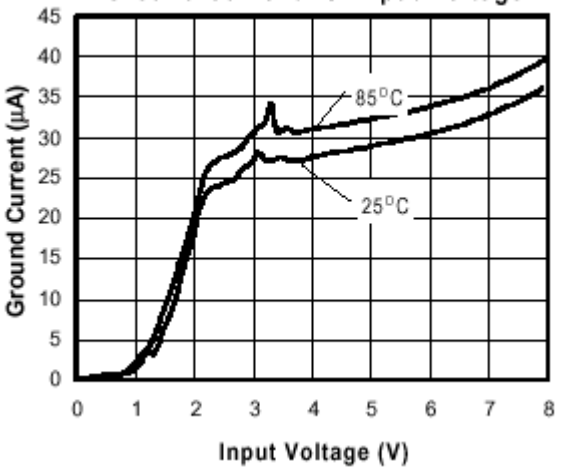


Load Step (1mA-300mA)

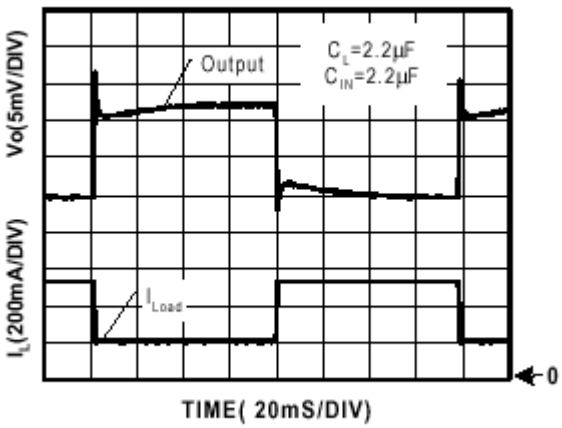


Drop Out Voltage vs. Output Voltage

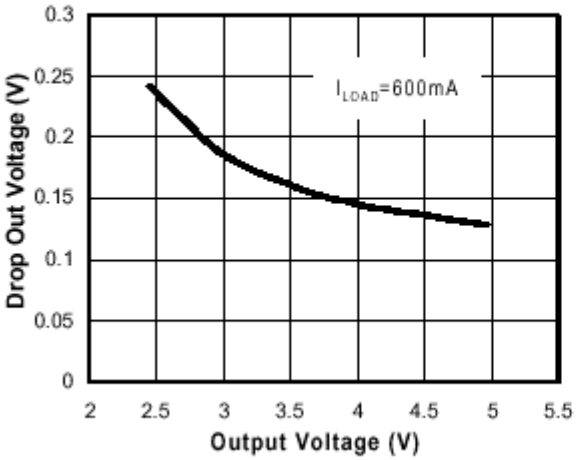


Power Supply Rejection Ratio

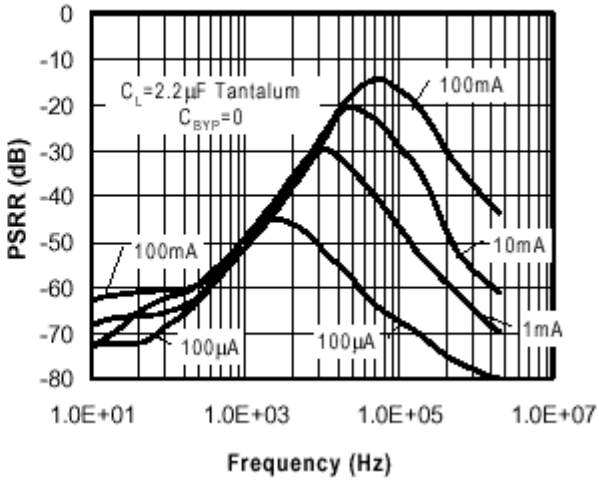


Safe Operating Area

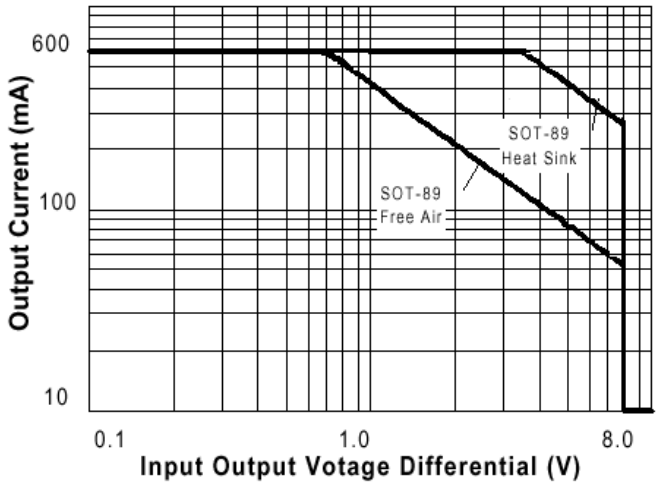


Transient Line Response

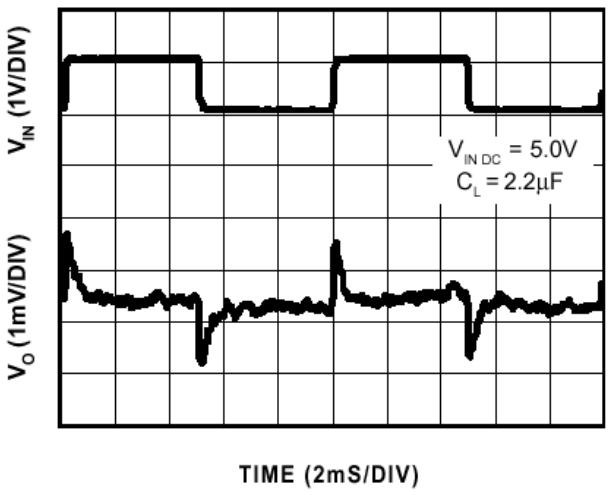


Noise Measurement

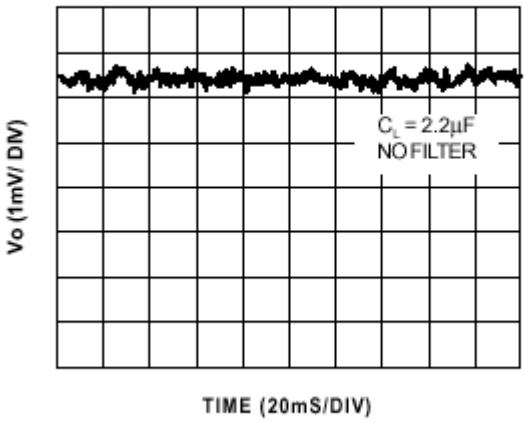


Overtemperature Shutdown

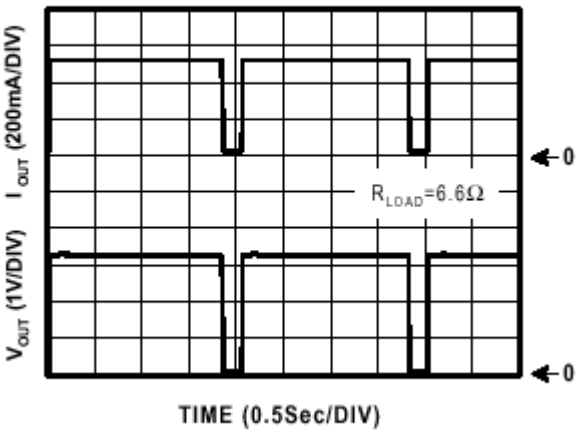

Current Limit Response

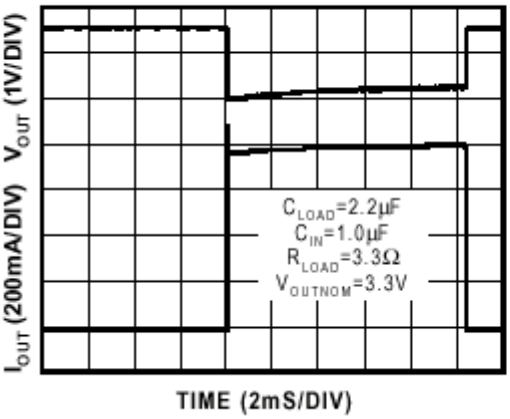



Short Circuit Response

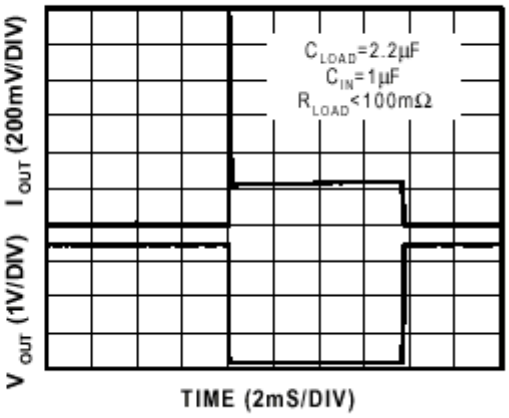


PACKAGE DIMENSION

SOT-89 (M89)

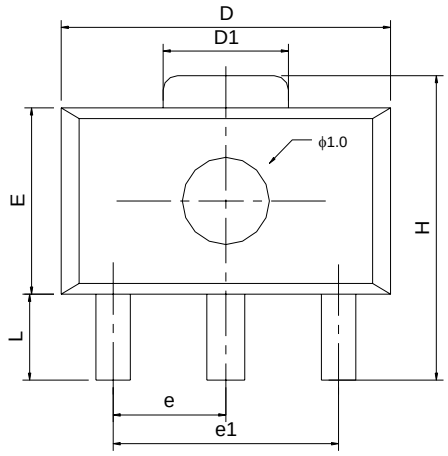

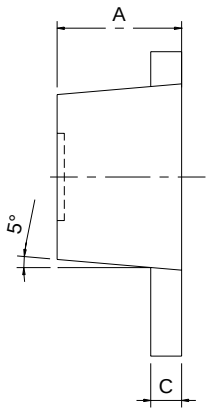



SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.40	1.50	1.60	0.055	0.059	0.063
L	0.80	---	1.20	0.031	---	0.047
b	0.36	0.42	0.48	0.014	0.016	0.018
b1	0.41	0.47	0.53	0.016	0.018	0.020
C	0.38	0.40	0.43	0.014	0.015	0.017
D	4.40	4.50	4.60	0.173	0.177	0.181
D1	1.40	1.60	1.75	0.055	0.062	0.069
H	3.94	---	4.25	0.155	---	0.167
E	2.40	2.50	2.60	0.094	0.098	0.102
e1	2.90	3.00	3.10	0.114	0.118	0.122
e	1.45	1.50	1.55	0.057	0.059	0.061

NUMBERING SCHEME

Ordering Number: CM2862XYZ (note1)

note1:
CM2862: 600mA CMOS LDO
X : Suffix for voltage output (note 2)
Y : Suffix for Temperature Range (note 3)
Z : Suffix for Package Type (note 4)

note 2: see CMOS LDO Voltage Suffix Table

note 3:
Y= I : -40℃~+85℃ (only I grade support for all CMOS LDOs)

note 4:
Z is single alphabet with or without digits
M89 : SOT-89 (TR only)

CMOS LDO Voltage Suffix Table

Output Voltage	Suffix	Output Voltage	Suffix
1.5V	A	3.0V	P
1.6V	B	3.1V	Q
1.7V	C	3.2V	R
1.8V	D	3.3V	S
1.9V	E	3.4V	T
2.0V	F	3.5V	U
2.1V	G	3.6V	V
2.2V	H	3.7V	W
2.3V	I	3.8V	X
2.4V	J	3.9V	Y
2.5V	K	4.0V	Z
2.6V	L		
2.7V	M		
2.8V	N		
2.9V	O		

IMPORTANT NOTICE

Champion Microelectronic Corporation (CMC) reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

A few applications using integrated circuit products may involve potential risks of death, personal injury, or severe property or environmental damage. CMC integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of CMC products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

HsinChu Headquarter

5F, No. 11, Park Avenue II,
Science-Based Industrial Park,
HsinChu City, Taiwan
TEL: +886-3-567 9979
FAX: +886-3-567 9909

Sales & Marketing

11F, No. 306-3, SEC. 1, Ta Tung Road,
Hsichih, Taipei Hsien 221, Taiwan

TEL: +886-2-8692 1591
FAX: +886-2-8692 1596