

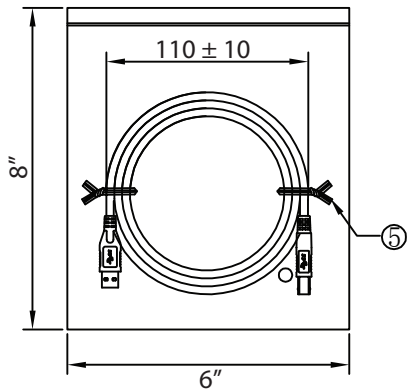


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED

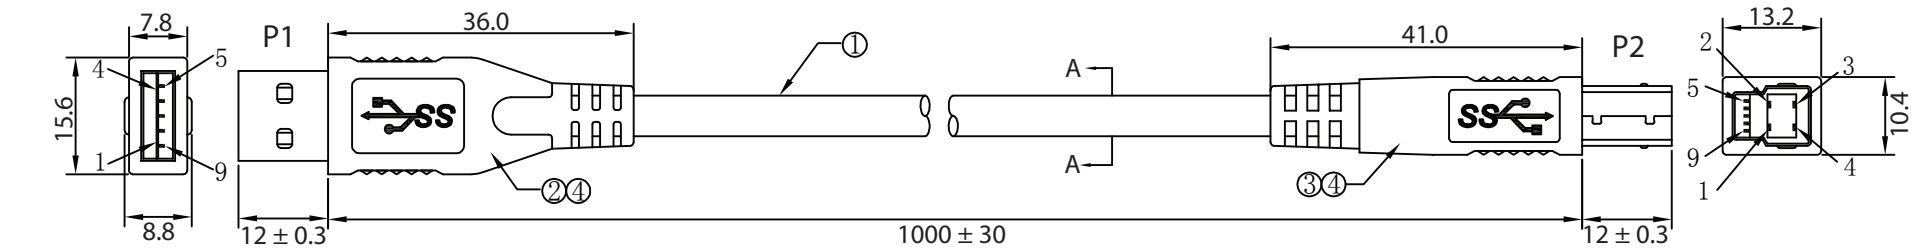

WIRING:				
P1	COLOR		P2	
VBUS	1 RED		1	VBUS
D-	2 WHITE		2	D-
D+	3 GREEN		3	D+
GND	4 BLACK		4	GND
StdA_SSRX-	5 BLUE		5	StdA_SSTX-
StdA_SSRX+	6 YELLOW		6	StdA_SSTX+
GND_DRAIN	7 DRAIN		7	GND_DRAIN
StdA_SSTX-	8 PURPLE		8	StdA_SSRX-
StdA_SSTX+	9 ORANGE		9	StdA_SSRX+
	SHIELD			SHIELD

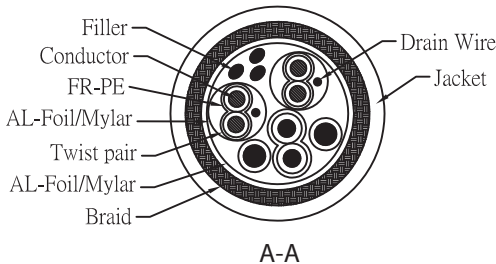

CONTROLLED

No.	PARTS NAME	SPECIFICATION STANDARD	QTY	REMARKS
①	CABLE	UL 20276 O.D. 5.5mm COLOR: BLACK	1	
②	USB3.0 A M 9PIN GOLD PLATED	30U" SHELL NICKEL PLATED INSULATOR BLUE	1	
③	USB3.0 B M 9PIN GOLD PLATED	30U" SHELL NICKEL PLATED INSULATOR BLUE	1	
④	PVC	45P PVC BLACK	14	g
⑤	CABLE TIE	L=9cm COLOR: BLACK	2	

- NOTES:
- CABLE: UL20276
(1Px30AWG+D+AL+MY)x2C+1Px30AWG+2Cx24AWG+AL+B
OUTER JACKET: BLACK, O.D.: 5.5mm
 - CONNECTORS: USB 3.0 A MALE TO USB 3.0 B MALE
 - HOOD: MOLDED TYPE, COLOR: BLACK
 - PACKING: 1PC/POLYBAG
 - RoHS COMPLIANT

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCI DIVISION		
		Part Number:	3023003-01M	RoHS Compliant
0-1	0.15	Description: USB 3.0 A/M - USB 3.0 B/M		
1-6	0.20			
6-18	0.30	UNIT: mm		
18-50	0.50			
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	R.Nuti 06-25-10	06-25-10	LY / 06-25-10
250-500	1.20			