


Miniature Power Relay

SRC-Series





- •10A contact switching capability.
- High breakdown voltage: 4000V (between coil and contact).
- Compliance with RoHS and the requirements for White Goods
- Compliance with IEC60335-1



Safety Approval

UL, C-UL File No.: E179745 TUV File No.: R50252208

CQC File No.: CQC13002089945

VDE File No.: 40045446

Contact Capacity

Model	SRC	SRCH			
Nominal switching capacity (res. load)	5A 277VAC	7A 277VAC			
Max. switching current	10A	10A			
Max. switching voltage	277VAC	277VAC			
Max. switching power	2770VA	2770VA			

Characteristic Data

Contact material	Silver alloy				
Initial contact resistance (at 6VDC 1A)	100mΩ Max.(1A 6VDC)				
Operate time (at nominal volt.)	20msec. Max. (no diode)				
Release time (at nominal volt.)	10msec. Max. (no diode)				
Initial insulation resistance	1,000MΩ Min. (DC500V)				
Initial dialoctric atrangth	Between open contacts: AC750V 50/60HZ 1min.				
Initial dielectric strength	Between coil and contact: AC4,000V,50/60HZ 1min.				
Vibration resistance	Destructive	10 ~ 55Hz at double amplitude of 1.5 mm			
	Functional	10 ~ 55Hz at double amplitude of 1.5 mm			
Shock resistance	Destructive	100G Min.			
	Functional	10G Min.			
Endurance (operations)	Mechanical (at 10,800 ops./h)	10,000,000(at room temperature)			
	Electrical (at 360 ops./h)	5A 277VAC:100,000 SRC (at room temperature)			
		7A 277VAC:100,000 SRCH (at room temperature)			
Ambient temperature	-40°C~+105°C (no condensation)				
Unit weight	Approx. 3.9 g				

Coil Data (at 20°C)

Nominal voltage (VDC)	Nominal operating current ± 10% (mA)	Coil resistance ± 10% (Ω)	Max. allowable voltage	Pick-up voltage (Max.)	Drop-out voltage (Min.)	Nominal operating power
5	40.00	125				
6	33.33	180	130 % of 75 % of nominal voltage voltage	nominal	5 % of nominal voltage	
9	22.22	405				.Approx
12	16.67	720				0.20W
18	11.11	1,620		voitage		
24	8.57	2,880				

Coil Data (at 20°C)

Nominal voltage (VDC)	Nominal operating current ± 10% (mA)	Coil resistance ± 10% (Ω)	Max. allowable voltage	Pick-up voltage (Max.)	Drop-out voltage (Min.)	Nominal operating power	
5	72.00	69					
6	60.00	100	130 % of nominal voltage				
9	40.00	225			75 % of	5 % of	.Approx
12	30.00	400			nominal	nominal	
18	20.00	900		voltage	voltage	0.36W	
24	15.00	1,600					


Safety Approval Ratings

(Note: More detail of approval ratings, please refer to the safety certification)


Approval CQC		UL/CUL	TUV	VDE	
File No.	CQC13002089945	E179745	R50252208	40045446	
Approved ratings	SRC 5A 277VAC SRCH 7A 277VAC	SRC 5A 277VAC, Resistive 5A 277VAC, General Use SRCH 7A 277VAC, Resistive 7A 277VAC, General Use TV-3 120VAC	SRC 5A 277VAC SRCH 7A 277VAC	SRC 5A 277VAC SRCH 7A 277VAC	


- (1) The above-mentioned unspecified temperature ratings, means that the ambient temperature is room temperature.
- (2) Only some typical ratings are listed above. Each rating's test condition is different, so the electrical endurance will be different. If more details are required, please contact us.
- (3) For sealed type testing, please open the ventilation hole of case before test.


Ordering Information

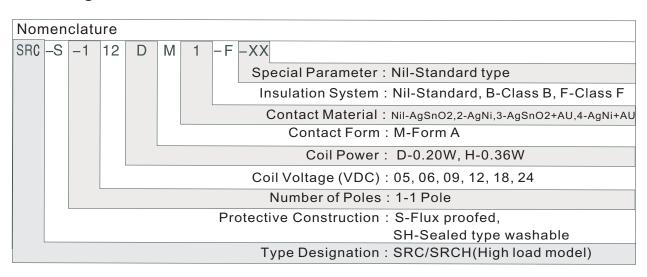

Outline Dimensions, Wiring Diagram, P.C. Board Layout (unit: mm)

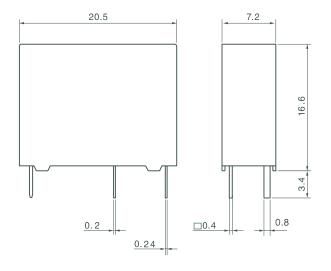



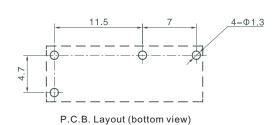

Unless otherwise specified:

If dimension < 1mm, tolerance: 0.2mm; If dimension 1~5mm, tolerance: 0.3mm; If dimension > 5mm, tolerance: 0.4mm.


Note: 1. Extended terminal dimension is dimension before soldering.

2. Tolerance of P.C.B. layout: 0.1mm.


Typical Applications

- Telecommunication equipment Safety equipment
- Office equipment
- Home appliances such as air conditioner, microwave oven


Characteristic Curves







Contact Voltage(V)



This datasheet is the customers' reference. All the specification are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should in a right position to choose the suitable product for their own application. For sealed relays after installation and cleaning, please open the vent hole on the case before use. If there is any query, please contact Sanyou for the technica service. However it is the user's responsibility to determine which product should be used only.