
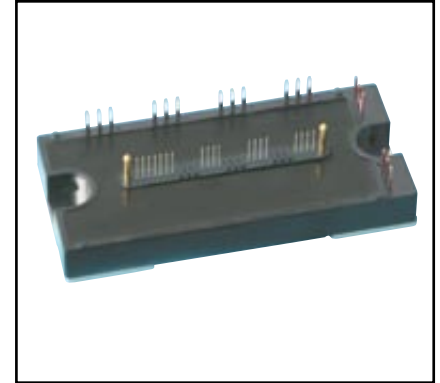


Intellimod™ L-Series

Three Phase

IGBT Inverter + Brake

150 Amperes/600 Volts

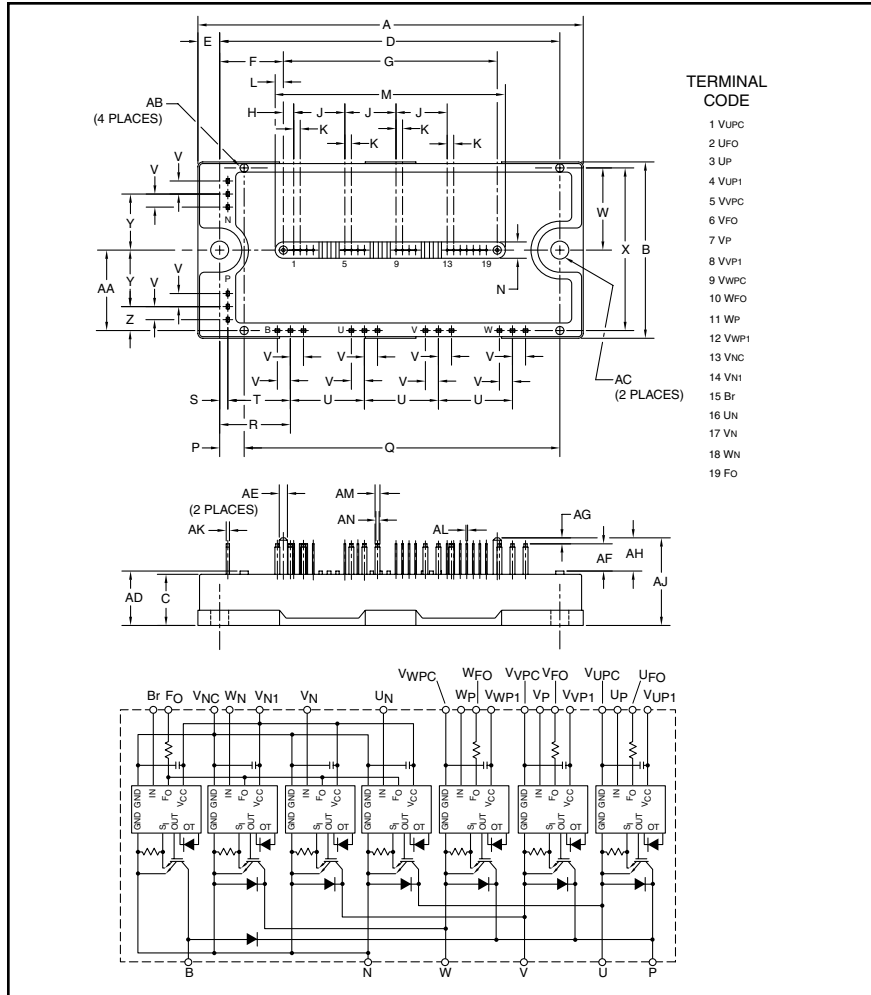

Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- ☐ Complete Output Power Circuit
- ☐ Gate Drive Circuit
- ☐ Protection Logic
 - Short Circuit
 - Over Temperature
 - Using On-chip Temperature Sensing
 - Under Voltage
- ☐ Low Loss Using 5th Generation IGBT Chip

Applications:

- ☐ Inverters
- ☐ UPS
- ☐ Motion/Servo Control
- ☐ Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM150RLB060 is a 600V, 150 Ampere Intellimod™ Intelligent Power Module.

Type	Current Rating Amperes	V _{CES} Volts (x 10)
PM	150	60

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.72	120.0
B	2.17	55.0
C	0.63	16.0
D	4.17	106.0
E	0.28	7.0
F	0.78	19.75
G	2.62	66.5
H	0.13	3.25
J	0.63	16.0
K	0.08	2.0
L	0.10	2.5
M	2.81	71.5
N	0.20	5.0
P	0.31	7.75
Q	3.87	98.25
R	0.87	22.0
S	0.10	2.5
T	0.77	19.5
U	0.91	23.0

Dimensions	Inches	Millimeters
V	0.16	4.0
W	1.01	25.75
X	2.00	50.75
Y	0.69	17.5
Z	0.30	7.5
AA	0.98	25.0
AB	0.10 Dia.	Dia. 2.5
AC	0.22 Dia.	Dia. 5.5
AD	0.67	17.0
AE	0.10 Dia.	Dia. 2.5
AF	0.33	8.5
AG	0.08	2.0
AH	0.41	10.5
AJ	1.08	27.5
AK	0.04	1.0
AL	0.02 Sq.	Sq. 0.5
AM	0.06	1.5
AN	0.04	1.0

PM150RLB060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
150 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	PM150RLB060	Units
Power Device Junction Temperature	T_j	-20 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Module Case Operating Temperature (Note 1)	T_C	-20 to 100	$^\circ\text{C}$
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Mounting Torque, M5 Main Terminal Screws	—	31	in-lb
Module Weight (Typical)	—	380	Grams
Supply Voltage, Surge (Applied between P - N)	$V_{\text{CC(surge)}}$	550	Volts
Self-protection Supply Voltage Limit (Short Circuit protection Capability)*	$V_{\text{CC(prot.)}}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	V_{ISO}	2500	Volts

*VD = 13.5 ~ 16.5V, Inverter Part, $T_j = 125^\circ\text{C}$

IGBT Inverter Sector

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$)	V_{CES}	600	Volts
Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_C$	150	Amperes
Peak Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_{\text{CP}}$	300	Amperes
Collector Dissipation ($T_C = 25^\circ\text{C}$) (Note 1)	P_C	480	Watts

IGBT Brake Sector

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$)	V_{CES}	600	Volts
Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_C$	75	Amperes
Peak Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_{\text{CP}}$	150	Amperes
Collector Dissipation ($T_C = 25^\circ\text{C}$) (Note 1)	P_C	300	Watts
Diode Rated DC Reverse Voltage ($T_C = 25^\circ\text{C}$)	$V_{\text{R(DC)}}$	600	Volts
Diode Forward Current	I_F	75	Amperes

Control Sector


Supply Voltage (Applied between $V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{WP1}}-V_{\text{WPC}}$, $V_{\text{N1}}-V_{\text{NC}}$)	V_D	20	Volts
Input Voltage (Applied between U_P-V_{UPC} , V_P-V_{VPC} , W_P-V_{WPC} , U_N-V_N , W_N-V_{NC})	V_{CIN}	20	Volts
Fault Output Supply Voltage (Applied between $U_{\text{FO}}-V_{\text{UPC}}$, $V_{\text{FO}}-V_{\text{VPC}}$, $W_{\text{FO}}-V_{\text{WPC}}$, F_O-V_{NC})	V_{FO}	20	Volts
Fault Output Current (U_{FO} , V_{FO} , W_{FO} , F_O Terminals)	I_{FO}	20	mA

PM150RLB060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
150 Amperes/600 Volts


Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector-Emitter Cutoff Current	I_{CES}	$V_{CE} = V_{CES}, V_D = 15V, T_j = 25^{\circ}C$	—	—	1.0	mA
		$V_{CE} = V_{CES}, V_D = 15V, T_j = 125^{\circ}C$	—	—	10	mA
Diode Forward Voltage	V_{EC}	$-I_C = 150A, V_{CIN} = 15V, V_D = 15V$	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15V, V_{CIN} = 0V, I_C = 150A, T_j = 25^{\circ}C$	—	1.6	2.1	Volts
		$V_D = 15V, V_{CIN} = 0V, I_C = 150A, T_j = 125^{\circ}C$	—	1.5	2.0	Volts
Inductive Load Switching Times	t_{on}	$V_D = 15V, V_{CIN} = 0 \Leftrightarrow 15V$ $V_{CC} = 300V, I_C = 150A$ $T_j = 125^{\circ}C$	0.5	1.0	2.4	μs
	t_{rr}		—	0.2	0.4	μs
	$t_{C(on)}$		—	0.4	1.0	μs
	t_{off}		—	1.2	2.5	μs
	$t_{C(off)}$		—	0.5	1.0	μs
IGBT Brake Sector						
Collector-Emitter Cutoff Current	I_{CES}	$V_{CE} = V_{CES}, V_D = 15V, T_j = 25^{\circ}C$	—	—	1.0	mA
		$V_{CE} = V_{CES}, V_D = 15V, T_j = 125^{\circ}C$	—	—	10	mA
Diode Forward Voltage	V_{FM}	$I_F = 75A$	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15V, V_{CIN} = 0V, I_C = 75A, T_j = 25^{\circ}C$	—	1.6	2.1	Volts
		$V_D = 15V, V_{CIN} = 0V, I_C = 75A, T_j = 125^{\circ}C$	—	1.5	2.0	Volts

Note 1: T_C (base plate) Measurement Point



Note 2: T_C (under the chip) Measurement Point



Arm Axis	UP		VP		WP		UN		VN		WN		Br	
	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi
X	29.0	29.5	64.6	65.1	85.9	86.4	38.1	37.6	54.8	55.3	76.1	75.6	18.3	22.4
Y	-7.3	1.6	-7.3	2.1	-7.3	2.1	5.3	-4.6	5.3	-4.6	5.3	-4.6	-7.4	7.0

PM150RLB060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
150 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Control Sector						
Short Circuit Trip Level	SC	Inverter Part	300	—	—	Amperes
($-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $V_D = 15\text{V}$)		Brake Part	150	—	—	Amperes
Short Circuit Current Delay Time	$t_{\text{off(SC)}}$	$V_D = 15\text{V}$	—	0.2	—	μs
Over Temperature Protection	OT	Trip Level	135	145	155	$^\circ\text{C}$
(Detect T_j of IGBT Chip)	OT_R	Reset Level	—	125	—	$^\circ\text{C}$
Supply Circuit Under-voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
($-20 \leq T_j \leq 125^\circ\text{C}$)	UV_R	Reset Level	—	12.5	—	Volts
Circuit Current	I_D	$V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{N1}-V_{\text{NC}}$	—	20	30	mA
		$V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{\text{XP1}}-V_{\text{XPC}}$	—	5	10	mA
Input ON Threshold Voltage	$V_{\text{th(on)}}$	Applied between U_P-V_{UPC} .	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{\text{th(off)}}$	V_P-V_{VPC} , W_P-V_{WPC} , U_N-V_N , W_N-Br-V_{NC}	1.7	2.0	2.3	Volts
Fault Output Current*	$I_{\text{FO(H)}}$	$V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$	—	—	0.01	mA
	$I_{\text{FO(L)}}$	$V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$	—	10	15	mA
Fault Output Pulse Width*	t_{FO}	$V_D = 15\text{V}$	1.0	1.8	—	ms

*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower device operate to protect it.

Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{\text{th(j-c)Q}}$	Inverter IGBT (Per 1/6 Module) (Note 1)	—	—	0.26	$^\circ\text{C/Watt}$
	$R_{\text{th(j-c)D}}$	Inverter FWDi (Per 1/6 Module) (Note 1)	—	—	0.43	$^\circ\text{C/Watt}$
	$R_{\text{th(j-c)Q}}$	Brake IGBT (Per 1/6 Module) (Note 1)	—	—	0.42	$^\circ\text{C/Watt}$
	$R_{\text{th(j-c)D}}$	Brake FWDi (Per 1/6 Module) (Note 1)	—	—	0.69	$^\circ\text{C/Watt}$
	$R_{\text{th(j-c)Q}}$	Inverter IGBT (Per 1/6 Module) (Note 2)	—	—	0.20**	$^\circ\text{C/Watt}$
	$R_{\text{th(j-c)D}}$	Inverter FWDi (Per 1/6 Module) (Note 2)	—	—	0.33**	$^\circ\text{C/Watt}$
	$R_{\text{th(j-c)Q}}$	Brake IGBT (Per 1/6 Module) (Note 2)	—	—	0.32**	$^\circ\text{C/Watt}$
	$R_{\text{th(j-c)D}}$	Brake FWDi (Per 1/6 Module) (Note 2)	—	—	0.53**	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{\text{th(c-f)}}$	Case to Fin Per Module, Thermal Grease Applied (Note 1)	—	—	0.038	$^\circ\text{C/Watt}$

** If you use this value, $R_{\text{th(f-a)}}$ should be measured just under the chips.

Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	V_{CC}	Applied across P-N Terminals	≤ 400	Volts
Control Supply Voltage***	V_D	Applied between $V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{WP1}}-V_{\text{WPC}}$, $V_{\text{N1}}-V_{\text{NC}}$	15.0 ± 1.5	Volts
Input ON Voltage	$V_{\text{CIN(on)}}$	Applied between U_P-V_{UPC} .	≤ 0.8	Volts
Input OFF Voltage	$V_{\text{CIN(off)}}$	V_P-V_{VPC} , W_P-V_{WPC} , U_N-V_N , W_N-Br-V_{NC}	≥ 9.0	Volts
PWM Input Frequency	f_{PWM}		≤ 20	kHz
Arm Shoot-through Blocking Time	t_{DEAD}	Input Signal	≥ 2.0	μs










*** With ripple satisfying the following conditions: dv/dt swing $\leq \pm 5\text{V}/\mu\text{s}$, Variation $\leq 2\text{V}$ peak to peak.

PM150RLB060

Intellimod™ L-Series

Three Phase IGBT Inverter + Brake

150 Amperes/600 Volts

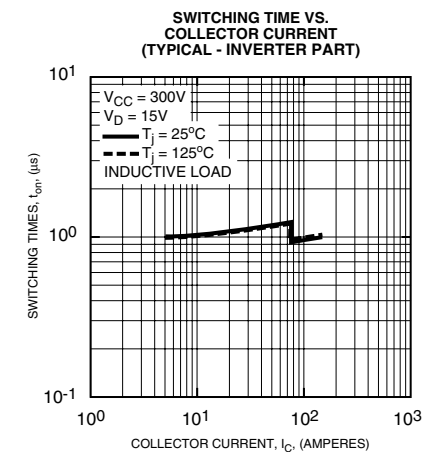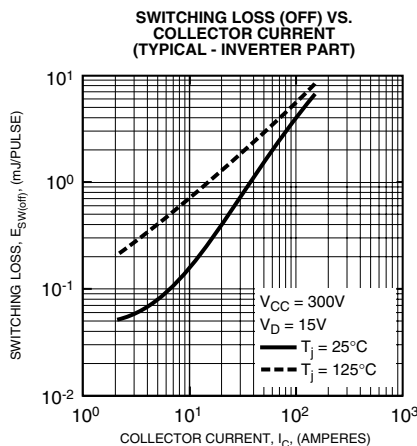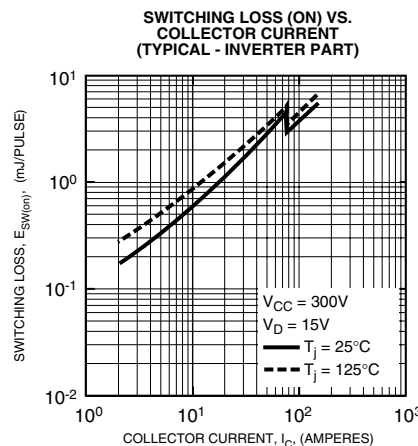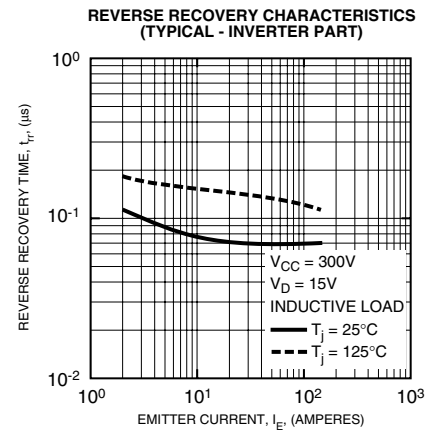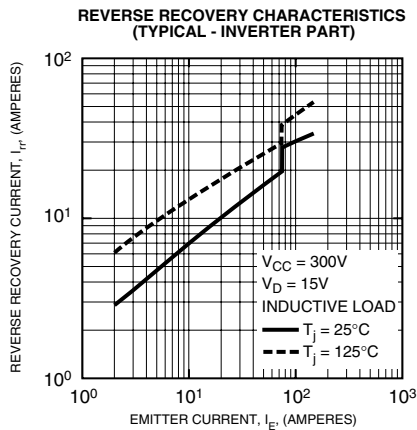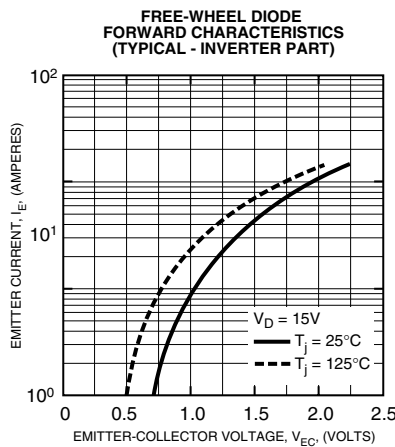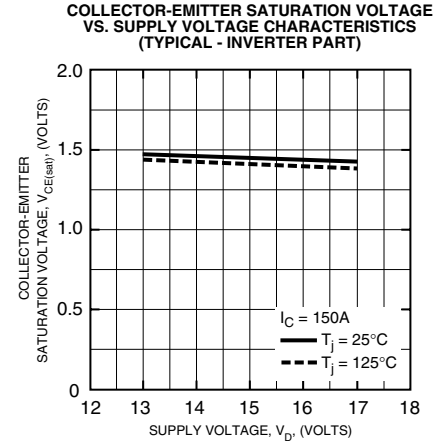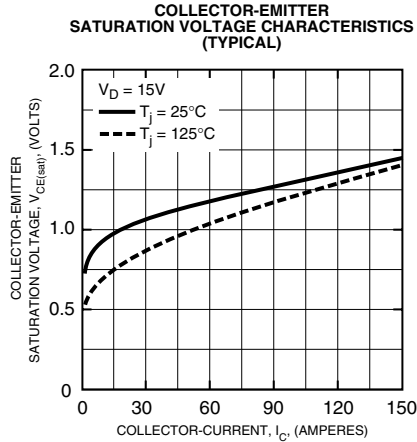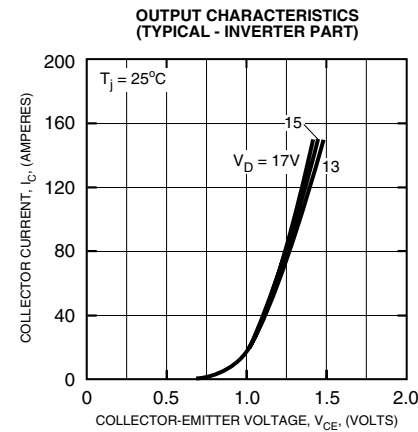


PM150RLB060

Intellimod™ L-Series


Three Phase IGBT Inverter + Brake

150 Amperes/600 Volts


SWITCHING TIME VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

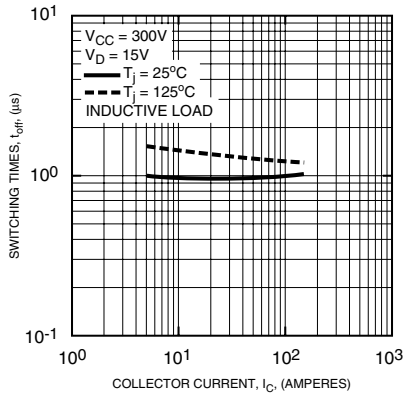


SWITCHING TIME VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

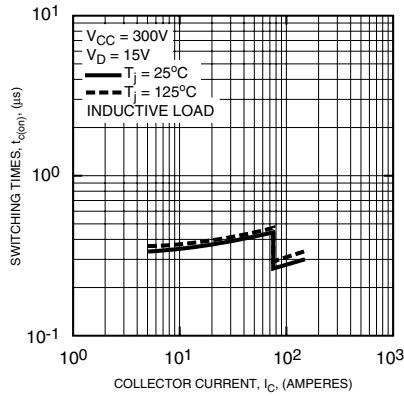


SWITCHING TIME VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

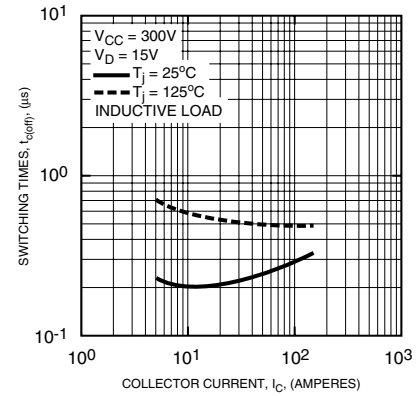


TRANSIENT THERMAL
IMPEDANCE CHARACTERISTICS
(IGBT & FWDI - INVERTER PART)

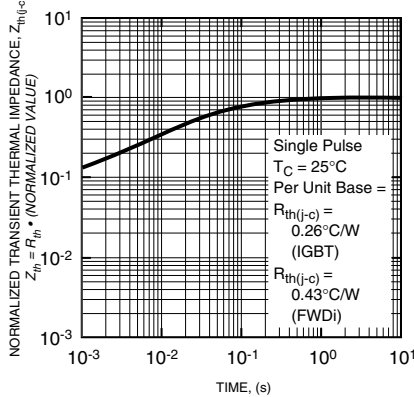


OUTPUT CHARACTERISTICS
(TYPICAL - BRAKE PART)

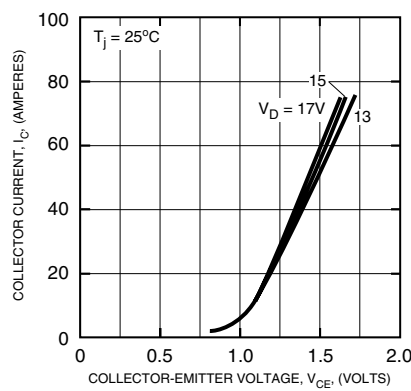


COLLECTOR-EMITTER
SATURATION VOLTAGE CHARACTERISTICS
(TYPICAL - BRAKE PART)

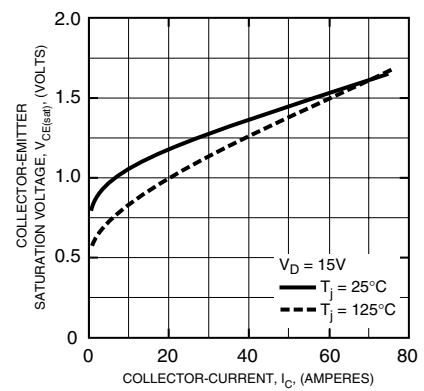

COLLECTOR-EMITTER SATURATION VOLTAGE
VS. SUPPLY VOLTAGE CHARACTERISTICS
(TYPICAL - BRAKE PART)

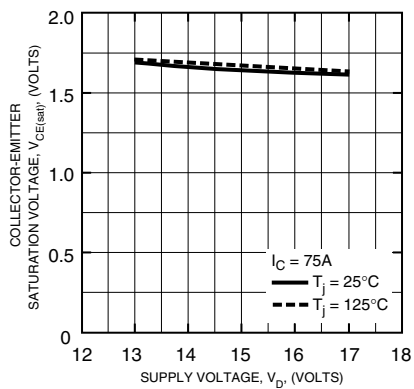

FREE-WHEEL DIODE
FORWARD CHARACTERISTICS
(TYPICAL - BRAKE PART)

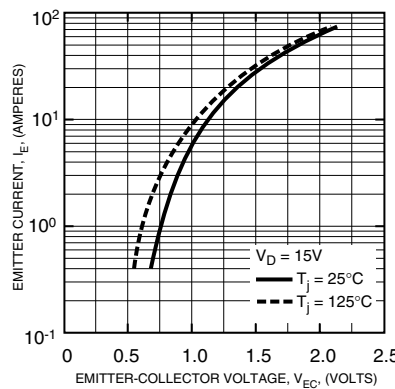

TRANSIENT THERMAL
IMPEDANCE CHARACTERISTICS
(IGBT & FWDI - BRAKE PART)

