

# 74AUP1G07-Q100

Low-power buffer with open-drain output

Rev. 1 — 1 July 2019

Product data sheet

## 1. General description

The 74AUP1G07-Q100 provides the single non-inverting buffer with open-drain output. The output of the device is an open drain and can be connected to other open-drain outputs to implement active-LOW wired-OR or active-HIGH wired-AND functions.

Schmitt-trigger action at all inputs makes the circuit tolerant to slower input rise and fall times across the entire  $V_{CC}$  range from 0.8 V to 3.6 V.

This device ensures a very low static and dynamic power consumption across the entire  $V_{CC}$  range from 0.8 V to 3.6 V.

This device is fully specified for partial power-down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry disables the output, preventing the damaging backflow current through the device when it is powered down.

This product has been qualified to the Automotive Electronics Council (AEC) standard Q100 (Grade 1) and is suitable for use in automotive applications.

## 2. Features and benefits

- Automotive product qualification in accordance with AEC-Q100 (Grade 1)
  - Specified from -40 °C to +85 °C and from -40 °C to +125 °C
- Wide supply voltage range from 0.8 V to 3.6 V
- High noise immunity
- Complies with JEDEC standards:
  - JESD8-12 (0.8 V to 1.3 V)
  - JESD8-11 (0.9 V to 1.65 V)
  - JESD8-7 (1.2 V to 1.95 V)
  - JESD8-5 (1.8 V to 2.7 V)
  - JESD8-B (2.7 V to 3.6 V)
- ESD protection:
  - HBM: ANSI/ESDA/JEDEC JS-001 Class 3A exceeds 5000 V
  - MM: JESD22-A115-A exceeds 200 V
  - MIL-STD-883, method 3015 Class 3A exceeds 5000 V
- Low static power consumption;  $I_{CC} = 0.9 \mu\text{A}$  (maximum)
- Latch-up performance exceeds 100 mA per JESD 78 Class II
- Inputs accept voltages up to 3.6 V
- Low noise overshoot and undershoot < 10 % of  $V_{CC}$
- $I_{OFF}$  circuitry provides partial Power-down mode operation

## 3. Ordering information

Table 1. Ordering information

| Type number      | Package           |        |  |          |
|------------------|-------------------|--------|--|----------|
|                  | Temperature range | Name   | Description  | Version  |
| 74AUP1G07GW-Q100 | -40 °C to +125 °C | TSSOP5 | plastic thin shrink small outline package; 5 leads; body width 1.25 mm | SOT353-1 |


## 4. Marking

Table 2. Marking

| Type number      | Marking code <sup>[1]</sup> |
|------------------|-----------------------------|
| 74AUP1G07GW-Q100 | pS                          |


[1] The pin 1 indicator is located on the lower left corner of the device, below the marking code.

## 5. Functional diagram

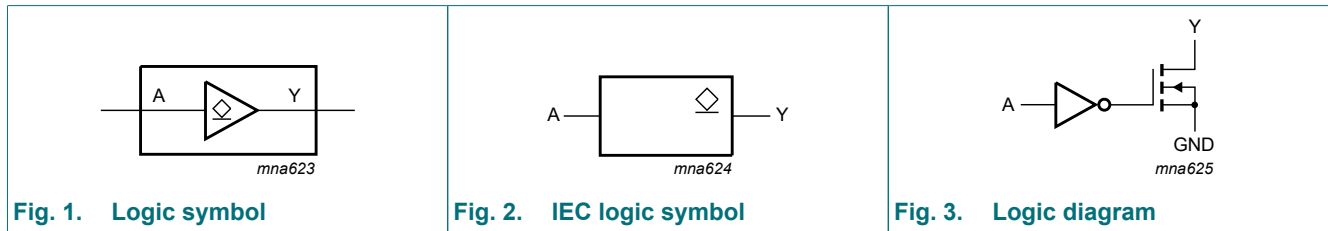

## 6. Pinning information

### 6.1. Pinning

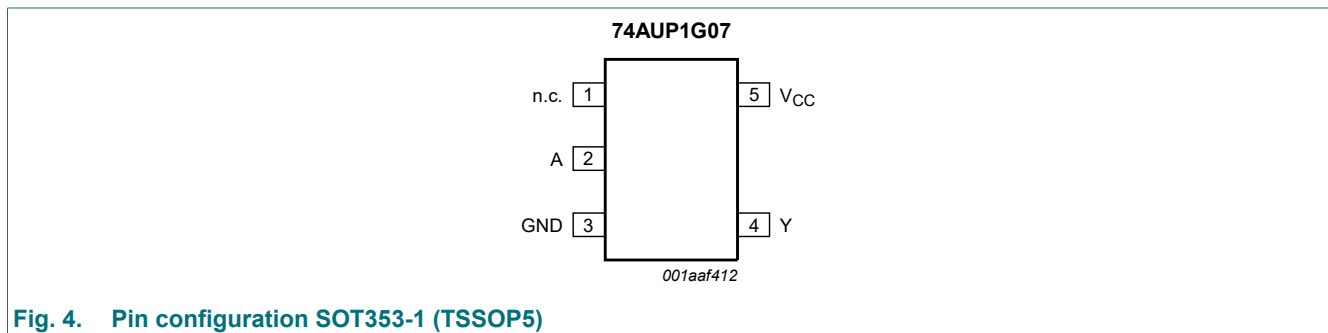

### 6.2. Pin description

Table 3. Pin description

| Symbol          | Pin | Description    |
|-----------------|-----|----------------|
| n.c.            | 1   | not connected  |
| A               | 2   | data input     |
| GND             | 3   | ground (0 V)   |
| Y               | 4   | data output    |
| V <sub>CC</sub> | 5   | supply voltage |

## 7. Functional description

**Table 4. Function table**

*H = HIGH voltage level; L = LOW voltage level; Z = high-impedance OFF state.*

| Input    | Output   |
|----------|----------|
| <b>A</b> | <b>Y</b> |
| L        | L        |
| H        | Z        |

## 8. Limiting values

**Table 5. Limiting values**

*In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).*

| Symbol    | Parameter               | Conditions                      | Min      | Max  | Unit |
|-----------|-------------------------|---------------------------------|----------|------|------|
| $V_{CC}$  | supply voltage          |                                 | -0.5     | +4.6 | V    |
| $I_{IK}$  | input clamping current  | $V_I < 0$ V                     | -50      | -    | mA   |
| $V_I$     | input voltage           |                                 | [1] -0.5 | +4.6 | V    |
| $I_{OK}$  | output clamping current | $V_O < 0$ V                     | -50      | -    | mA   |
| $V_O$     | output voltage          | Active mode and Power-down mode | [1] -0.5 | +4.6 | V    |
| $I_O$     | output current          | $V_O = 0$ V to $V_{CC}$         | -        | 20   | mA   |
| $I_{CC}$  | supply current          |                                 | -        | 50   | mA   |
| $I_{GND}$ | ground current          |                                 | -50      | -    | mA   |
| $T_{stg}$ | storage temperature     |                                 | -65      | +150 | °C   |
| $P_{tot}$ | total power dissipation | $T_{amb} = -40$ °C to $+125$ °C | [2] -    | 250  | mW   |

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] For SOT353-1 (TSSOP5) package: above 74 °C the value of  $P_{tot}$  derates linearly with 3.3 mW/K.

## 9. Recommended operating conditions

**Table 6. Recommended operating conditions**

| Symbol              | Parameter                           | Conditions                      | Min | Max  | Unit |
|---------------------|-------------------------------------|---------------------------------|-----|------|------|
| $V_{CC}$            | supply voltage                      |                                 | 0.8 | 3.6  | V    |
| $V_I$               | input voltage                       |                                 | 0   | 3.6  | V    |
| $V_O$               | output voltage                      | Active mode and Power-down mode | 0   | 3.6  | V    |
| $T_{amb}$           | ambient temperature                 |                                 | -40 | +125 | °C   |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{CC} = 0.8$ V to $3.6$ V     | 0   | 200  | ns/V |

## 10. Static characteristics

**Table 7. Static characteristics**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol   | Parameter                            | Conditions  | Min                 | Typ | Max                 | Unit |
|--|--------------------------------------|---|---------------------|-----|---------------------|------|
| <b>T<sub>amb</sub> = 25 °C</b>                   |                                      |   |                     |     |                     |      |
| V <sub>IH</sub>                                  | HIGH-level input voltage             | V <sub>CC</sub> = 0.8 V   | 0.70V <sub>CC</sub> | -   | -                   | V    |
|  |                                      | V <sub>CC</sub> = 0.9 V to 1.95 V   | 0.65V <sub>CC</sub> | -   | -                   | V    |
|  |                                      | V <sub>CC</sub> = 2.3 V to 2.7 V  | 1.6                 | -   | -                   | V    |
|  |                                      | V <sub>CC</sub> = 3.0 V to 3.6 V  | 2.0                 | -   | -                   | V    |
| V <sub>IL</sub>                                  | LOW-level input voltage              | V <sub>CC</sub> = 0.8 V   | -                   | -   | 0.30V <sub>CC</sub> | V    |
|  |                                      | V <sub>CC</sub> = 0.9 V to 1.95 V   | -                   | -   | 0.35V <sub>CC</sub> | V    |
|  |                                      | V <sub>CC</sub> = 2.3 V to 2.7 V  | -                   | -   | 0.7                 | V    |
|  |                                      | V <sub>CC</sub> = 3.0 V to 3.6 V  | -                   | -   | 0.9                 | V    |
| V <sub>OL</sub>                                  | LOW-level output voltage             | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>   |                     |     |                     |      |
|  |                                      | I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 0.8 V to 3.6 V  | -                   | -   | 0.1                 | V    |
|  |                                      | I <sub>O</sub> = 1.1 mA; V <sub>CC</sub> = 1.1 V  | -                   | -   | 0.3V <sub>CC</sub>  | V    |
|  |                                      | I <sub>O</sub> = 1.7 mA; V <sub>CC</sub> = 1.4 V  | -                   | -   | 0.31                | V    |
|  |                                      | I <sub>O</sub> = 1.9 mA; V <sub>CC</sub> = 1.65 V   | -                   | -   | 0.31                | V    |
|  |                                      | I <sub>O</sub> = 2.3 mA; V <sub>CC</sub> = 2.3 V  | -                   | -   | 0.31                | V    |
|  |                                      | I <sub>O</sub> = 3.1 mA; V <sub>CC</sub> = 2.3 V  | -                   | -   | 0.44                | V    |
|  |                                      | I <sub>O</sub> = 2.7 mA; V <sub>CC</sub> = 3.0 V  | -                   | -   | 0.31                | V    |
| I <sub>O</sub> = 4.0 mA; V <sub>CC</sub> = 3.0 V | -                                    | -   | 0.44                | V   |                     |      |
| I <sub>I</sub>                                   | input leakage current                | V <sub>I</sub> = GND to 3.6 V; V <sub>CC</sub> = 0 V to 3.6 V                                       | -                   | -   | ±0.1                | μA   |
| I <sub>OZ</sub>                                  | OFF-state output current             | V <sub>I</sub> = V <sub>IH</sub> ; V <sub>O</sub> = 0 V to 3.6 V;<br>V <sub>CC</sub> = 0 V to 3.6 V | -                   | -   | ±0.1                | μA   |
| I <sub>OFF</sub>                                 | power-off leakage current            | V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V; V <sub>CC</sub> = 0 V                              | -                   | -   | ±0.2                | μA   |
| ΔI <sub>OFF</sub>                                | additional power-off leakage current | V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V; V <sub>CC</sub> = 0 V to 0.2 V                     | -                   | -   | ±0.2                | μA   |
| I <sub>CC</sub>                                  | supply current                       | V <sub>I</sub> = GND or V <sub>CC</sub> ; I <sub>O</sub> = 0 A;<br>V <sub>CC</sub> = 0.8 V to 3.6 V | -                   | -   | 0.5                 | μA   |
| ΔI <sub>CC</sub>                                 | additional supply current            | V <sub>I</sub> = V <sub>CC</sub> - 0.6 V; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 3.3 V             | -                   | -   | 40                  | μA   |
| C <sub>I</sub>                                   | input capacitance                    | V <sub>CC</sub> = 0 V to 3.6 V; V <sub>I</sub> = GND or V <sub>CC</sub>                             | -                   | 0.8 | -                   | pF   |
| C <sub>O</sub>                                   | output capacitance                   | output enabled; V <sub>O</sub> = GND; V <sub>CC</sub> = 0 V   | -                   | 1.7 | -                   | pF   |
|  |                                      | output disabled; V <sub>O</sub> = GND; V <sub>CC</sub> = 0 V  | -                   | 1.1 | -                   | pF   |

| Symbol   | Parameter                            | Conditions  | Min                 | Typ | Max                 | Unit |
|--|--------------------------------------|---|---------------------|-----|---------------------|------|
| <b>T<sub>amb</sub> = -40 °C to +85 °C</b>        |                                      |   |                     |     |                     |      |
| V <sub>IH</sub>                                  | HIGH-level input voltage             | V <sub>CC</sub> = 0.8 V   | 0.70V <sub>CC</sub> | -   | -                   | V    |
|  |                                      | V <sub>CC</sub> = 0.9 V to 1.95 V   | 0.65V <sub>CC</sub> | -   | -                   | V    |
|  |                                      | V <sub>CC</sub> = 2.3 V to 2.7 V  | 1.6                 | -   | -                   | V    |
|  |                                      | V <sub>CC</sub> = 3.0 V to 3.6 V  | 2.0                 | -   | -                   | V    |
| V <sub>IL</sub>                                  | LOW-level input voltage              | V <sub>CC</sub> = 0.8 V   | -                   | -   | 0.30V <sub>CC</sub> | V    |
|  |                                      | V <sub>CC</sub> = 0.9 V to 1.95 V   | -                   | -   | 0.35V <sub>CC</sub> | V    |
|  |                                      | V <sub>CC</sub> = 2.3 V to 2.7 V  | -                   | -   | 0.7                 | V    |
|  |                                      | V <sub>CC</sub> = 3.0 V to 3.6 V  | -                   | -   | 0.9                 | V    |
| V <sub>OL</sub>                                  | LOW-level output voltage             | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>   |                     |     |                     |      |
|  |                                      | I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 0.8 V to 3.6 V  | -                   | -   | 0.1                 | V    |
|  |                                      | I <sub>O</sub> = 1.1 mA; V <sub>CC</sub> = 1.1 V  | -                   | -   | 0.3V <sub>CC</sub>  | V    |
|  |                                      | I <sub>O</sub> = 1.7 mA; V <sub>CC</sub> = 1.4 V  | -                   | -   | 0.37                | V    |
|  |                                      | I <sub>O</sub> = 1.9 mA; V <sub>CC</sub> = 1.65 V   | -                   | -   | 0.35                | V    |
|  |                                      | I <sub>O</sub> = 2.3 mA; V <sub>CC</sub> = 2.3 V  | -                   | -   | 0.33                | V    |
|  |                                      | I <sub>O</sub> = 3.1 mA; V <sub>CC</sub> = 2.3 V  | -                   | -   | 0.45                | V    |
|  |                                      | I <sub>O</sub> = 2.7 mA; V <sub>CC</sub> = 3.0 V  | -                   | -   | 0.33                | V    |
| I <sub>O</sub> = 4.0 mA; V <sub>CC</sub> = 3.0 V | -                                    | -   | 0.45                | V   |                     |      |
| I <sub>I</sub>                                   | input leakage current                | V <sub>I</sub> = GND to 3.6 V; V <sub>CC</sub> = 0 V to 3.6 V                                       | -                   | -   | ±0.5                | μA   |
| I <sub>OZ</sub>                                  | OFF-state output current             | V <sub>I</sub> = V <sub>IH</sub> ; V <sub>O</sub> = 0 V to 3.6 V;<br>V <sub>CC</sub> = 0 V to 3.6 V | -                   | -   | ±0.5                | μA   |
| I <sub>OFF</sub>                                 | power-off leakage current            | V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V; V <sub>CC</sub> = 0 V                              | -                   | -   | ±0.5                | μA   |
| ΔI <sub>OFF</sub>                                | additional power-off leakage current | V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V; V <sub>CC</sub> = 0 V to 0.2 V                     | -                   | -   | ±0.6                | μA   |
| I <sub>CC</sub>                                  | supply current                       | V <sub>I</sub> = GND or V <sub>CC</sub> ; I <sub>O</sub> = 0 A;<br>V <sub>CC</sub> = 0.8 V to 3.6 V | -                   | -   | 0.9                 | μA   |
| ΔI <sub>CC</sub>                                 | additional supply current            | V <sub>I</sub> = V <sub>CC</sub> - 0.6 V; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 3.3 V             | -                   | -   | 50                  | μA   |

| Symbol   | Parameter                            | Conditions  | Min                 | Typ | Max                 | Unit |
|--|--------------------------------------|---|---------------------|-----|---------------------|------|
| <b>T<sub>amb</sub> = -40 °C to +125 °C</b>       |                                      |   |                     |     |                     |      |
| V <sub>IH</sub>                                  | HIGH-level input voltage             | V <sub>CC</sub> = 0.8 V   | 0.75V <sub>CC</sub> | -   | -                   | V    |
|  |                                      | V <sub>CC</sub> = 0.9 V to 1.95 V   | 0.70V <sub>CC</sub> | -   | -                   | V    |
|  |                                      | V <sub>CC</sub> = 2.3 V to 2.7 V  | 1.6                 | -   | -                   | V    |
|  |                                      | V <sub>CC</sub> = 3.0 V to 3.6 V  | 2.0                 | -   | -                   | V    |
| V <sub>IL</sub>                                  | LOW-level input voltage              | V <sub>CC</sub> = 0.8 V   | -                   | -   | 0.25V <sub>CC</sub> | V    |
|  |                                      | V <sub>CC</sub> = 0.9 V to 1.95 V   | -                   | -   | 0.30V <sub>CC</sub> | V    |
|  |                                      | V <sub>CC</sub> = 2.3 V to 2.7 V  | -                   | -   | 0.7                 | V    |
|  |                                      | V <sub>CC</sub> = 3.0 V to 3.6 V  | -                   | -   | 0.9                 | V    |
| V <sub>OL</sub>                                  | LOW-level output voltage             | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>   |                     |     |                     |      |
|  |                                      | I <sub>O</sub> = 20 µA; V <sub>CC</sub> = 0.8 V to 3.6 V  | -                   | -   | 0.11                | V    |
|  |                                      | I <sub>O</sub> = 1.1 mA; V <sub>CC</sub> = 1.1 V  | -                   | -   | 0.33V <sub>CC</sub> | V    |
|  |                                      | I <sub>O</sub> = 1.7 mA; V <sub>CC</sub> = 1.4 V  | -                   | -   | 0.41                | V    |
|  |                                      | I <sub>O</sub> = 1.9 mA; V <sub>CC</sub> = 1.65 V   | -                   | -   | 0.39                | V    |
|  |                                      | I <sub>O</sub> = 2.3 mA; V <sub>CC</sub> = 2.3 V  | -                   | -   | 0.36                | V    |
|  |                                      | I <sub>O</sub> = 3.1 mA; V <sub>CC</sub> = 2.3 V  | -                   | -   | 0.50                | V    |
|  |                                      | I <sub>O</sub> = 2.7 mA; V <sub>CC</sub> = 3.0 V  | -                   | -   | 0.36                | V    |
| I <sub>O</sub> = 4.0 mA; V <sub>CC</sub> = 3.0 V | -                                    | -   | 0.50                | V   |                     |      |
| I <sub>I</sub>                                   | input leakage current                | V <sub>I</sub> = GND to 3.6 V; V <sub>CC</sub> = 0 V to 3.6 V                                       | -                   | -   | ±0.75               | µA   |
| I <sub>OZ</sub>                                  | OFF-state output current             | V <sub>I</sub> = V <sub>IH</sub> ; V <sub>O</sub> = 0 V to 3.6 V;<br>V <sub>CC</sub> = 0 V to 3.6 V | -                   | -   | ±0.75               | µA   |
| I <sub>OFF</sub>                                 | power-off leakage current            | V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V; V <sub>CC</sub> = 0 V                              | -                   | -   | ±0.75               | µA   |
| ΔI <sub>OFF</sub>                                | additional power-off leakage current | V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V; V <sub>CC</sub> = 0 V to 0.2 V                     | -                   | -   | ±0.75               | µA   |
| I <sub>CC</sub>                                  | supply current                       | V <sub>I</sub> = GND or V <sub>CC</sub> ; I <sub>O</sub> = 0 A;<br>V <sub>CC</sub> = 0.8 V to 3.6 V | -                   | -   | 1.4                 | µA   |
| ΔI <sub>CC</sub>                                 | additional supply current            | V <sub>I</sub> = V <sub>CC</sub> - 0.6 V; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 3.3 V             | -                   | -   | 75                  | µA   |

## 11. Dynamic characteristics

**Table 8. Dynamic characteristics**

Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 6.

| Symbol                           | Parameter         | Conditions                         | 25 °C |        |      | -40 °C to +125 °C |             |              | Unit |
|----------------------------------|-------------------|------------------------------------|-------|--------|------|-------------------|-------------|--------------|------|
|                                  |                   |                                    | Min   | Typ[1] | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| <b>C<sub>L</sub> = 5 pF</b>      |                   |                                    |       |        |      |                   |             |              |      |
| t <sub>pd</sub>                  | propagation delay | A to Y; see Fig. 5 [2]             |       |        |      |                   |             |              |      |
|                                  |                   | V <sub>CC</sub> = 0.8 V            | -     | 11.6   | -    | -                 | -           | -            | ns   |
|                                  |                   | V <sub>CC</sub> = 1.1 V to 1.3 V   | 2.1   | 4.1    | 7.5  | 1.7               | 9.1         | 10.0         | ns   |
|                                  |                   | V <sub>CC</sub> = 1.4 V to 1.6 V   | 1.6   | 3.0    | 5.1  | 1.3               | 6.1         | 6.7          | ns   |
|                                  |                   | V <sub>CC</sub> = 1.65 V to 1.95 V | 1.6   | 2.7    | 4.0  | 1.2               | 5.0         | 5.5          | ns   |
|                                  |                   | V <sub>CC</sub> = 2.3 V to 2.7 V   | 1.1   | 2.1    | 3.2  | 0.9               | 4.0         | 4.4          | ns   |
| V <sub>CC</sub> = 3.0 V to 3.6 V | 1.4               | 2.2                                | 2.8   | 1.1    | 3.3  | 3.6               | ns          |              |      |
| <b>C<sub>L</sub> = 10 pF</b>     |                   |                                    |       |        |      |                   |             |              |      |
| t <sub>pd</sub>                  | propagation delay | A to Y; see Fig. 5 [2]             |       |        |      |                   |             |              |      |
|                                  |                   | V <sub>CC</sub> = 0.8 V            | -     | 14.7   | -    | -                 | -           | -            | ns   |
|                                  |                   | V <sub>CC</sub> = 1.1 V to 1.3 V   | 3.0   | 5.1    | 9.0  | 2.4               | 11.2        | 12.3         | ns   |
|                                  |                   | V <sub>CC</sub> = 1.4 V to 1.6 V   | 2.3   | 3.8    | 6.1  | 2.0               | 7.4         | 8.1          | ns   |
|                                  |                   | V <sub>CC</sub> = 1.65 V to 1.95 V | 2.4   | 3.6    | 4.8  | 1.8               | 6.1         | 6.7          | ns   |
|                                  |                   | V <sub>CC</sub> = 2.3 V to 2.7 V   | 1.7   | 2.8    | 3.8  | 1.3               | 4.8         | 5.3          | ns   |
| V <sub>CC</sub> = 3.0 V to 3.6 V | 2.2               | 3.1                                | 4.2   | 1.6    | 4.5  | 5.0               | ns          |              |      |
| <b>C<sub>L</sub> = 15 pF</b>     |                   |                                    |       |        |      |                   |             |              |      |
| t <sub>pd</sub>                  | propagation delay | A to Y; see Fig. 5 [2]             |       |        |      |                   |             |              |      |
|                                  |                   | V <sub>CC</sub> = 0.8 V            | -     | 17.7   | -    | -                 | -           | -            | ns   |
|                                  |                   | V <sub>CC</sub> = 1.1 V to 1.3 V   | 3.5   | 6.1    | 10.4 | 3.2               | 13.1        | 14.5         | ns   |
|                                  |                   | V <sub>CC</sub> = 1.4 V to 1.6 V   | 3.0   | 4.5    | 6.8  | 2.6               | 8.6         | 9.4          | ns   |
|                                  |                   | V <sub>CC</sub> = 1.65 V to 1.95 V | 2.8   | 4.4    | 6.7  | 2.2               | 7.8         | 8.6          | ns   |
|                                  |                   | V <sub>CC</sub> = 2.3 V to 2.7 V   | 2.4   | 3.4    | 4.5  | 1.9               | 5.3         | 5.8          | ns   |
| V <sub>CC</sub> = 3.0 V to 3.6 V | 2.2               | 4.0                                | 5.7   | 1.9    | 6.1  | 6.7               | ns          |              |      |

| Symbol  | Parameter                     | Conditions  | 25 °C |        |      | -40 °C to +125 °C |             |              | Unit |
|---|-------------------------------|---|-------|--------|------|-------------------|-------------|--------------|------|
|   |                               |   | Min   | Typ[1] | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| <b>C<sub>L</sub> = 30 pF</b>                        |                               |   |       |        |      |                   |             |              |      |
| t <sub>pd</sub>                                     | propagation delay             | A to Y; see Fig. 5 [2]  |       |        |      |                   |             |              |      |
|   |                               | V <sub>CC</sub> = 0.8 V   | -     | 24.6   | -    | -                 | -           | -            | ns   |
|   |                               | V <sub>CC</sub> = 1.1 V to 1.3 V                                    | 4.8   | 9.0    | 15.6 | 4.3               | 18.8        | 20.7         | ns   |
|   |                               | V <sub>CC</sub> = 1.4 V to 1.6 V                                    | 4.1   | 6.7    | 9.4  | 3.7               | 11.8        | 13.0         | ns   |
|   |                               | V <sub>CC</sub> = 1.65 V to 1.95 V                                  | 3.8   | 6.8    | 9.7  | 3.2               | 11.0        | 12.1         | ns   |
|   |                               | V <sub>CC</sub> = 2.3 V to 2.7 V                                    | 3.7   | 5.2    | 6.7  | 3.0               | 7.1         | 7.8          | ns   |
| <b>C<sub>L</sub> = 5 pF, 10 pF, 15 pF and 30 pF</b> |                               |   |       |        |      |                   |             |              |      |
| C <sub>PD</sub>                                     | power dissipation capacitance | f <sub>i</sub> = 1 MHz; V <sub>I</sub> = GND to V <sub>CC</sub> [3] |       |        |      |                   |             |              |      |
|   |                               | V <sub>CC</sub> = 0.8 V   | -     | 0.5    | -    | -                 | -           | -            | pF   |
|   |                               | V <sub>CC</sub> = 1.1 V to 1.3 V                                    | -     | 0.6    | -    | -                 | -           | -            | pF   |
|   |                               | V <sub>CC</sub> = 1.4 V to 1.6 V                                    | -     | 0.6    | -    | -                 | -           | -            | pF   |
|   |                               | V <sub>CC</sub> = 1.65 V to 1.95 V                                  | -     | 0.7    | -    | -                 | -           | -            | pF   |
|   |                               | V <sub>CC</sub> = 2.3 V to 2.7 V                                    | -     | 0.9    | -    | -                 | -           | -            | pF   |
| <b>V<sub>CC</sub> = 3.0 V to 3.6 V</b>              |                               |   |       |        |      |                   |             |              |      |
|   |                               |   | -     | 1.2    | -    | -                 | -           | -            | pF   |

- [1] All typical values are measured at nominal V<sub>CC</sub>.
- [2] t<sub>pd</sub> is the same as t<sub>PZL</sub> and t<sub>PLZ</sub>.
- [3] C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW).  
 $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N$  where:  
 f<sub>i</sub> = input frequency in MHz;  
 V<sub>CC</sub> = supply voltage in V;  
 N = number of inputs switching.

### 11.1. Waveforms and test circuit


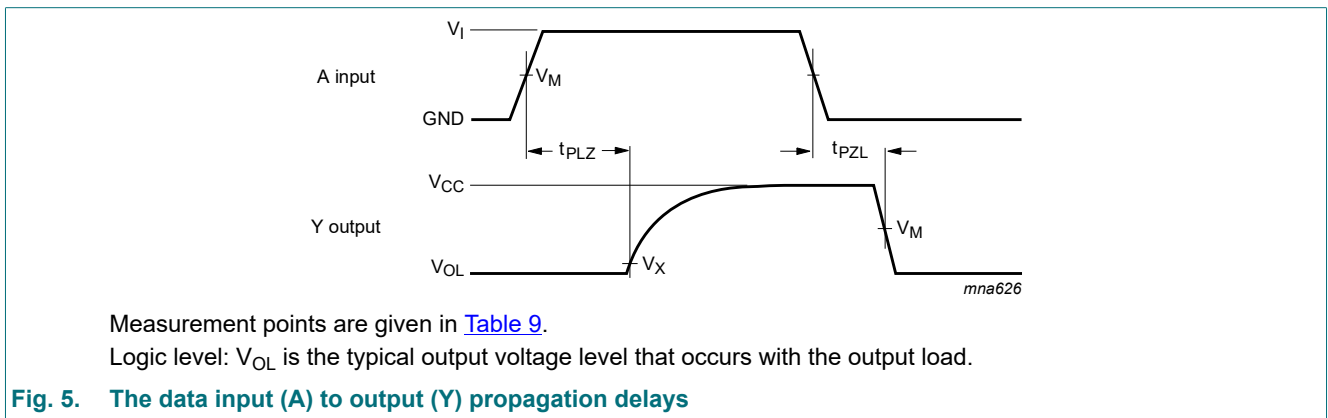


Table 9. Measurement points

| Supply voltage  | Input                 | Output                |                          |
|-----------------|-----------------------|-----------------------|--------------------------|
| V <sub>CC</sub> | V <sub>M</sub>        | V <sub>M</sub>        | V <sub>X</sub>           |
| 0.8 V to 1.6 V  | 0.5 x V <sub>CC</sub> | 0.5 x V <sub>CC</sub> | V <sub>OL</sub> + 0.1 V  |
| 1.65 V to 2.7 V | 0.5 x V <sub>CC</sub> | 0.5 x V <sub>CC</sub> | V <sub>OL</sub> + 0.15 V |
| 3.0 V to 3.6 V  | 0.5 x V <sub>CC</sub> | 0.5 x V <sub>CC</sub> | V <sub>OL</sub> + 0.3 V  |



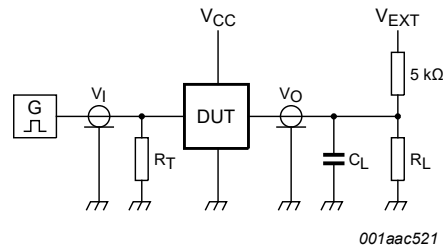

Test data is given in [Table 10](#).

Definitions for test circuit:

$R_L$  = Load resistance.

$C_L$  = Load capacitance including jig and probe capacitance.

$R_T$  = Termination resistance should be equal to the output impedance  $Z_o$  of the pulse generator.

$V_{EXT}$  = External voltage for measuring switching times.

**Fig. 6. Test circuit for measuring switching times**

**Table 10. Test data**

| Supply voltage | Load                         |              | $V_{EXT}$             |                       |                       |
|----------------|------------------------------|--------------|-----------------------|-----------------------|-----------------------|
| $V_{CC}$       | $C_L$                        | $R_L$ [1]    | $t_{PLH}$ , $t_{PHL}$ | $t_{PZH}$ , $t_{PHZ}$ | $t_{PZL}$ , $t_{PLZ}$ |
| 0.8 V to 3.6 V | 5 pF, 10 pF, 15 pF and 30 pF | 5 kΩ or 1 MΩ | open                  | GND                   | $2 \times V_{CC}$     |


[1] For measuring enable and disable times,  $R_L = 5 \text{ k}\Omega$ .

For measuring propagation delays, setup and hold times and pulse width,  $R_L = 1 \text{ M}\Omega$ .

12. Package outline

TSSOP5: plastic thin shrink small outline package; 5 leads; body width 1.25 mm

SOT353-1

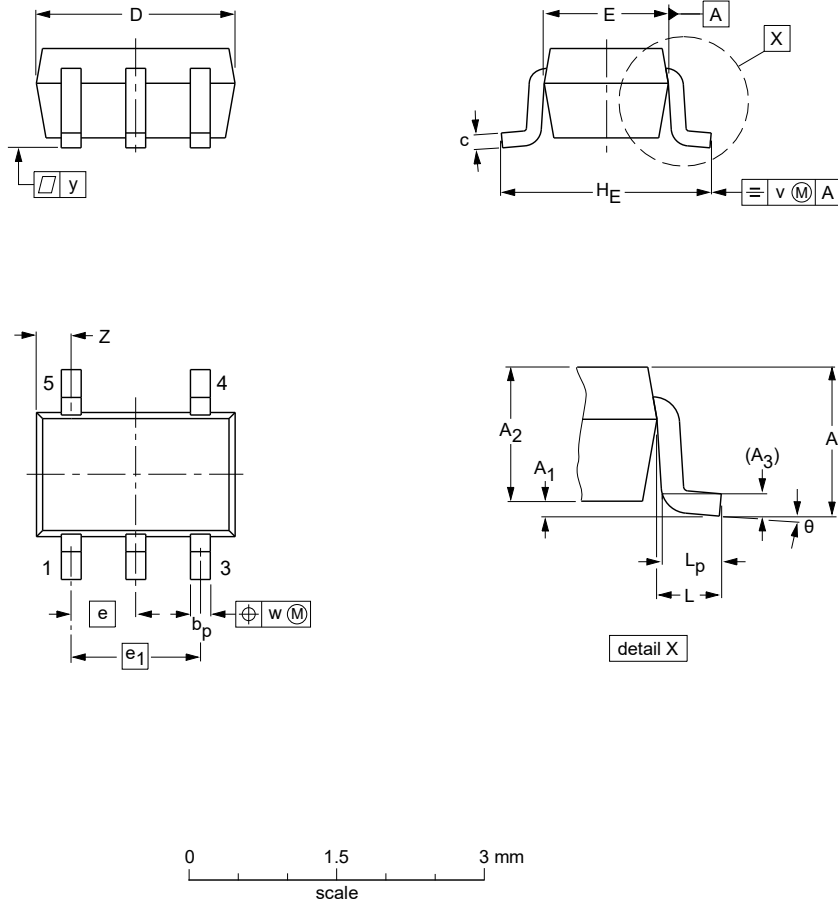

DIMENSIONS (mm are the original dimensions)

| UNIT | A max. | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | b <sub>p</sub> | c            | D <sup>(1)</sup> | E <sup>(1)</sup> | e    | e <sub>1</sub> | H <sub>E</sub> | L     | L <sub>p</sub> | v   | w   | y   | z <sup>(1)</sup> | θ        |
|------|--------|----------------|----------------|----------------|----------------|--------------|------------------|------------------|------|----------------|----------------|-------|----------------|-----|-----|-----|------------------|----------|
| mm   | 1.1    | 0.1<br>0       | 1.0<br>0.8     | 0.15           | 0.30<br>0.15   | 0.25<br>0.08 | 2.25<br>1.85     | 1.35<br>1.15     | 0.65 | 1.3            | 2.25<br>2.0    | 0.425 | 0.46<br>0.21   | 0.3 | 0.1 | 0.1 | 0.60<br>0.15     | 7°<br>0° |

Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

| OUTLINE VERSION | REFERENCES |        |        |  | EUROPEAN PROJECTION | ISSUE DATE           |
|-----------------|------------|--------|--------|--|---------------------|----------------------|
|                 | IEC        | JEDEC  | JEITA  |  |                     |                      |
| SOT353-1        |            | MO-203 | SC-88A |  |                     | 00-09-01<br>03-02-19 |

Fig. 7. Package outline SOT353-1 (TSSOP5)

## 13. Abbreviations

Table 11. Abbreviations

| Acronym | Description             |
|---------|-------------------------|
| CDM     | Charged Device Model    |
| DUT     | Device Under Test       |
| ESD     | ElectroStatic Discharge |
| HBM     | Human Body Model        |
| MM      | Machine Model           |

## 14. Revision history

Table 12. Revision history

| Document ID        | Release date | Data sheet status  | Change notice | Supersedes |
|--------------------|--------------|--------------------|---------------|------------|
| 74AUP1G07_Q100 v.1 | 20190701     | Product data sheet | -             | -          |



## Contents

|  |           |
|--|-----------|
| <b>1. General description</b> .....              | <b>1</b>  |
| <b>2. Features and benefits</b> .....            | <b>1</b>  |
| <b>3. Ordering information</b> .....             | <b>1</b>  |
| <b>4. Marking</b> .....                          | <b>2</b>  |
| <b>5. Functional diagram</b> .....               | <b>2</b>  |
| <b>6. Pinning information</b> .....              | <b>2</b>  |
| 6.1. Pinning.....                                | 2         |
| 6.2. Pin description.....                        | 2         |
| <b>7. Functional description</b> .....           | <b>3</b>  |
| <b>8. Limiting values</b> .....                  | <b>3</b>  |
| <b>9. Recommended operating conditions</b> ..... | <b>3</b>  |
| <b>10. Static characteristics</b> .....          | <b>4</b>  |
| <b>11. Dynamic characteristics</b> .....         | <b>7</b>  |
| 11.1. Waveforms and test circuit.....            | 8         |
| <b>12. Package outline</b> .....                 | <b>10</b> |
| <b>13. Abbreviations</b> .....                   | <b>11</b> |
| <b>14. Revision history</b> .....                | <b>11</b> |
| <b>15. Legal information</b> .....               | <b>12</b> |

© Nexperia B.V. 2019. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

Date of release: 1 July 2019