PASTERNACK
THE ENGINEER'S RF SOURCE



Transfer Electromechanical Relay Switch DC to 40 GHz, SMA, 80 Watts, 28V Control, 30V Indicator with Indicators, Latching, Normally Open

TECHNICAL DATA SHEET PE71S6071

The PE71S6071 is a DOUBLE POLE DOUBLE THROW RF COAXIAL RELAY SWITCH that operates from DC TO 40 GHz. The Switch has a 28 VDC LATCHING ACTUATOR, INDICATOR AND SELF CUT-OFF. The Switch has 2.92mm RF CONNECTORS and operates from -40 Deg C to +85 Deg C.

Features

- Double Pole Double Throw Relay Switch
- DC to 40 GHz Frequency Range
- 2.5M Operating Life
- 10 Watt Avg Power Min
- -40 to +85 Deg C Operating Temperature
- Insertion Loss 0.8 dB Max
- VSWR 1.9:1 Max

Applications

- High Performance Relay Switch
- Military Communications
- Communications Systems
- Test & Measurement

Electrical Specifications

Frequency Range	DC to 40 GHz
Impedance	50 Ohms
Actuator	Indicators, Latching, Normally Open
Actuating Current	125 mA
Control Voltage	28 Volts / Negative Common
Insertion Loss	0.8 dB Max
Input VSWR	1.9:1 Max
Output VSWR	1.9:1 Max
Indicator Rating	1 Watts / 30 Volts / 100 mA
Self Cut-Off Time	40 ms < CT < 120 ms

RF Characteristic

Description	Band 1	Band 2	Band 3	Band 4	Band 5	Units
Frequency Range	DC to 6	6 to 12.4	12.4 to 18	18 to 26.5	26.5 to 40	GHz
VSWR	1.3:1	1.4:1	1.5:1	1.7:1	1.9:1	
Insertion Loss	0.3	0.4	0.5	0.7	0.8	dB
Isolation	70	60	60	55	50	dB
Average Power @25 °C	80	60	50	20	10	Watts

Mechanical Specifications

Connector Type	SMA Female
Operating Life	2,500,000
Terminals	Solder Pins
Switching Time (nominal voltage, 25°C)	<15 ms Typ
Construction	Splashproof

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Transfer Electromechanical Relay Switch DC to 40 GHz, SMA, 80 Watts, 28V Control, 30V Indicator with Indicators, Latching, Normally Open PE71S6071

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2015 Pasternack Enterprises All Rights Reserved

PASTERNACK®
THE ENGINEER'S RF SOURCE



Transfer Electromechanical Relay Switch DC to 40 GHz, SMA, 80 Watts, 28V Control, 30V Indicator with Indicators, Latching, Normally Open

TECHNICAL DATA SHEET PE71S6071

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Storage Range	-55 to +85 deg C
Weight	0.19 lbs [86.18 g]

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation



Transfer Electromechanical Relay Switch DC to 40 GHz, SMA, 80 Watts, 28V Control, 30V Indicator with Indicators, Latching, Normally Open from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Transfer Electromechanical Relay Switch DC to 40 GHz, SMA, 80 Watts, 28V Control, 30V Indicator with Indicators, Latching, Normally Open PE71S6071

URL: http://www.pasternack.com/sma-transfer-electromechanical-relay-switch-40-ghz-indicators-pe71s6071-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2015 Pasternack Enterprises All Rights Reserved

PE71S6071 CAD Drawing

Transfer Electromechanical Relay Switch DC to 40 GHz, SMA, 80 Watts,
28V Control, 30V Indicator with Indicators, Latching, Normally Open

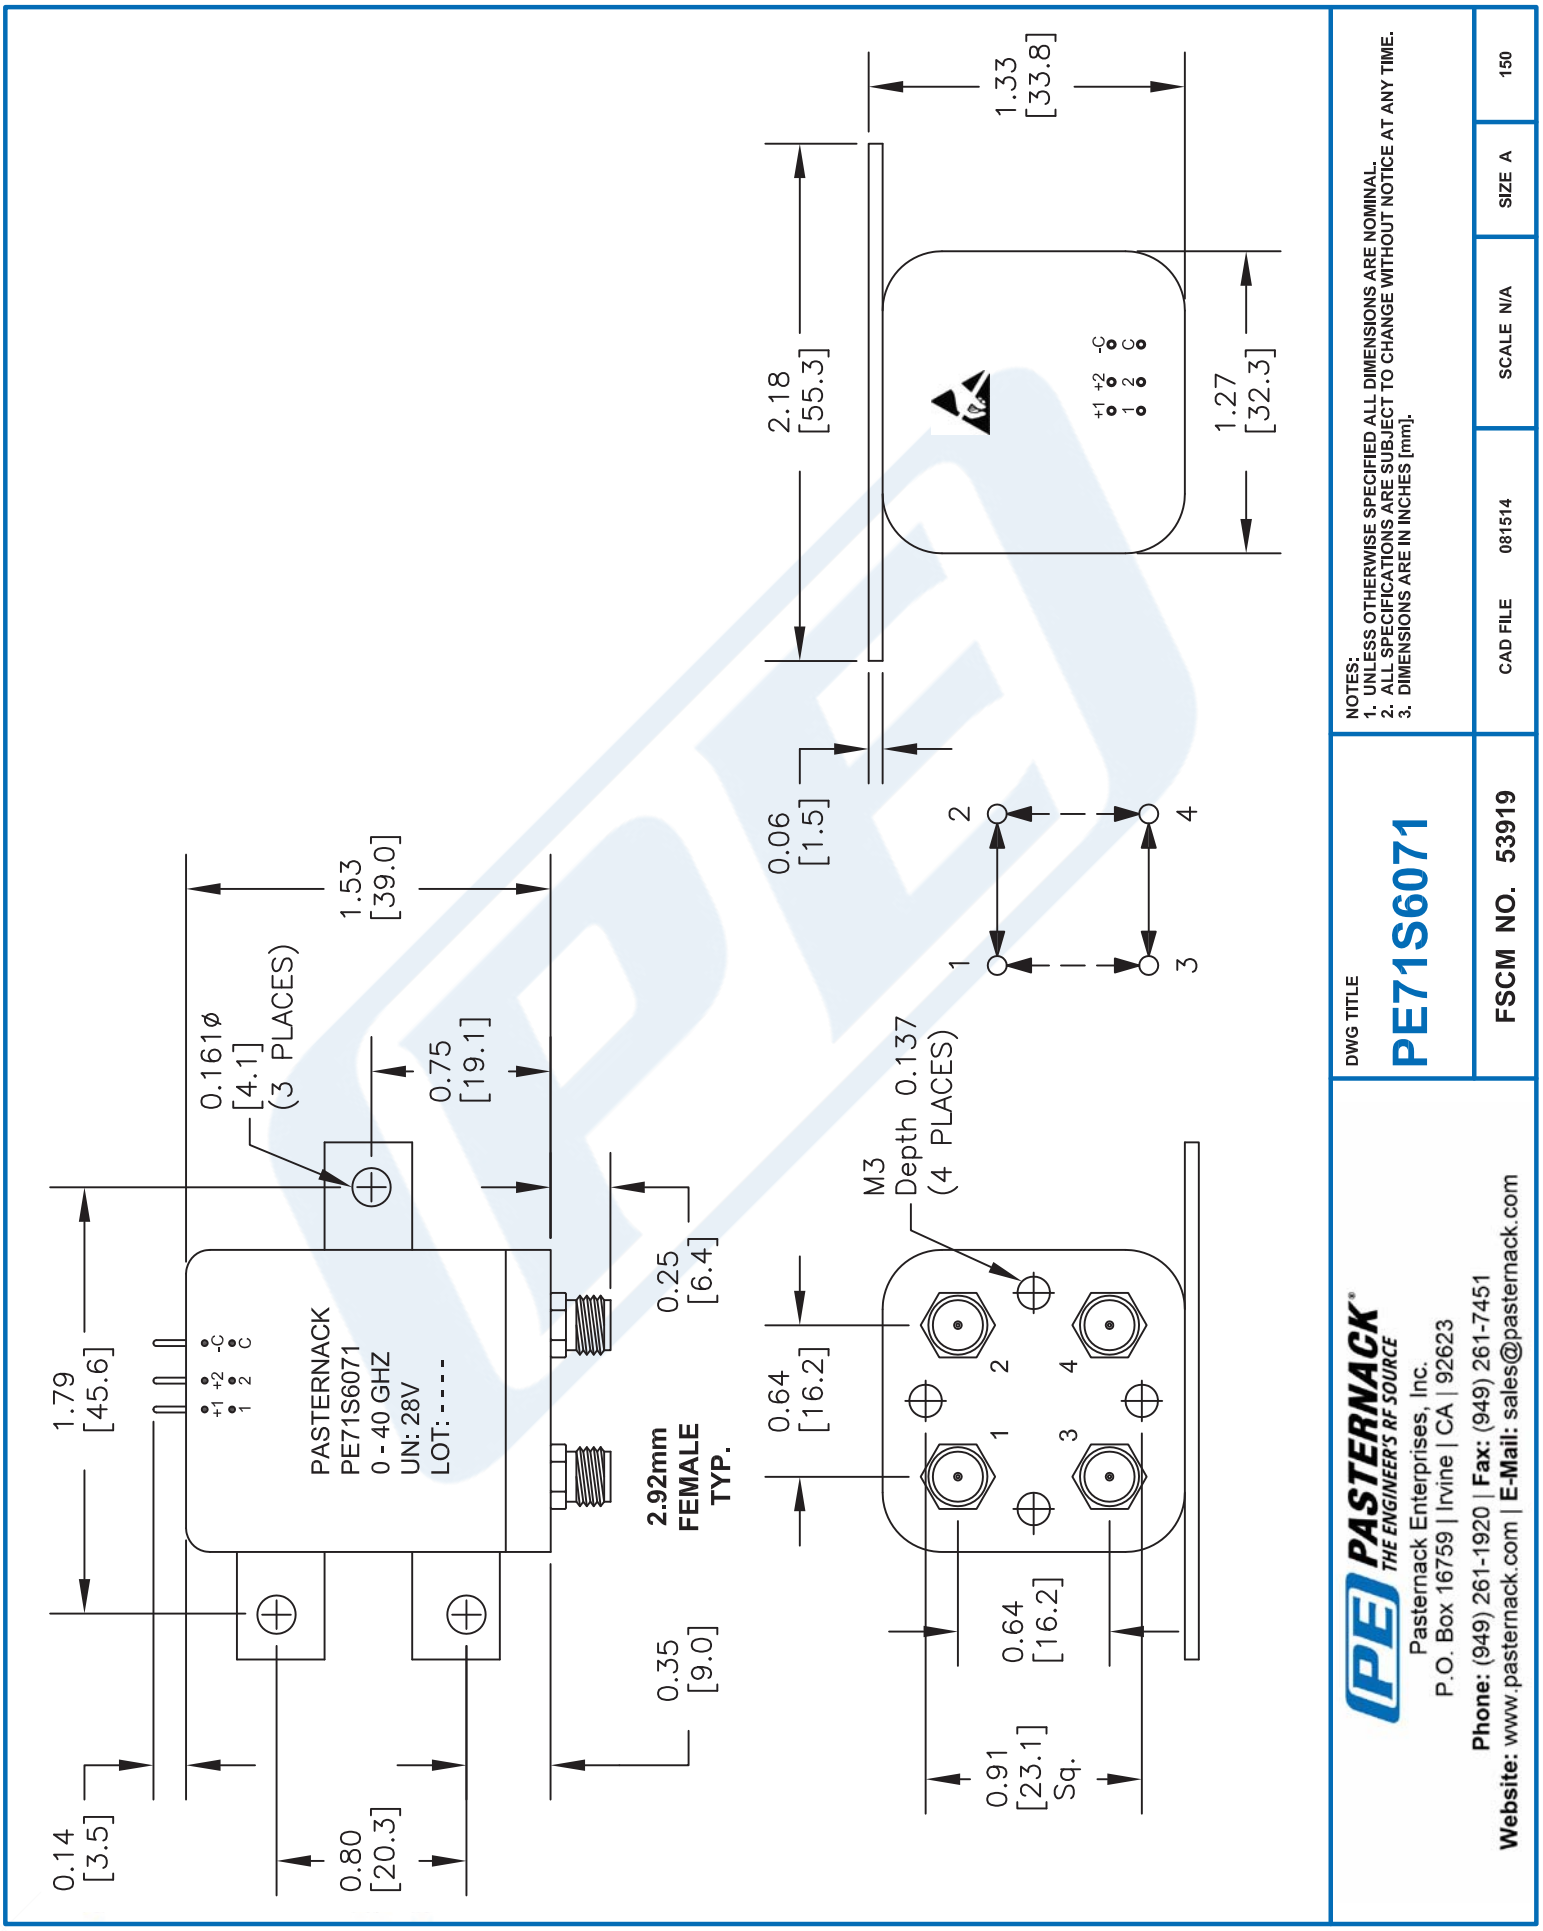

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE	081514	SCALE N/A	SIZE A	150

DWG TITLE: **PE71S6071**

FSCM NO. 53919


PASTERNACK® THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

© 2015 Pasternack Enterprises All Rights Reserved

PE71S6071 CAD Drawing

Transfer Electromechanical Relay Switch DC to 40 GHz, SMA, 80 Watts,
28V Control, 30V Indicator with Indicators, Latching, Normally Open

Voltage	RF Continuity		Indicator
– C + 1	1 ⟷ 3	2 ⟷ 4	C . 1
– C + 2	1 ⟷ 2	3 ⟷ 4	C . 2

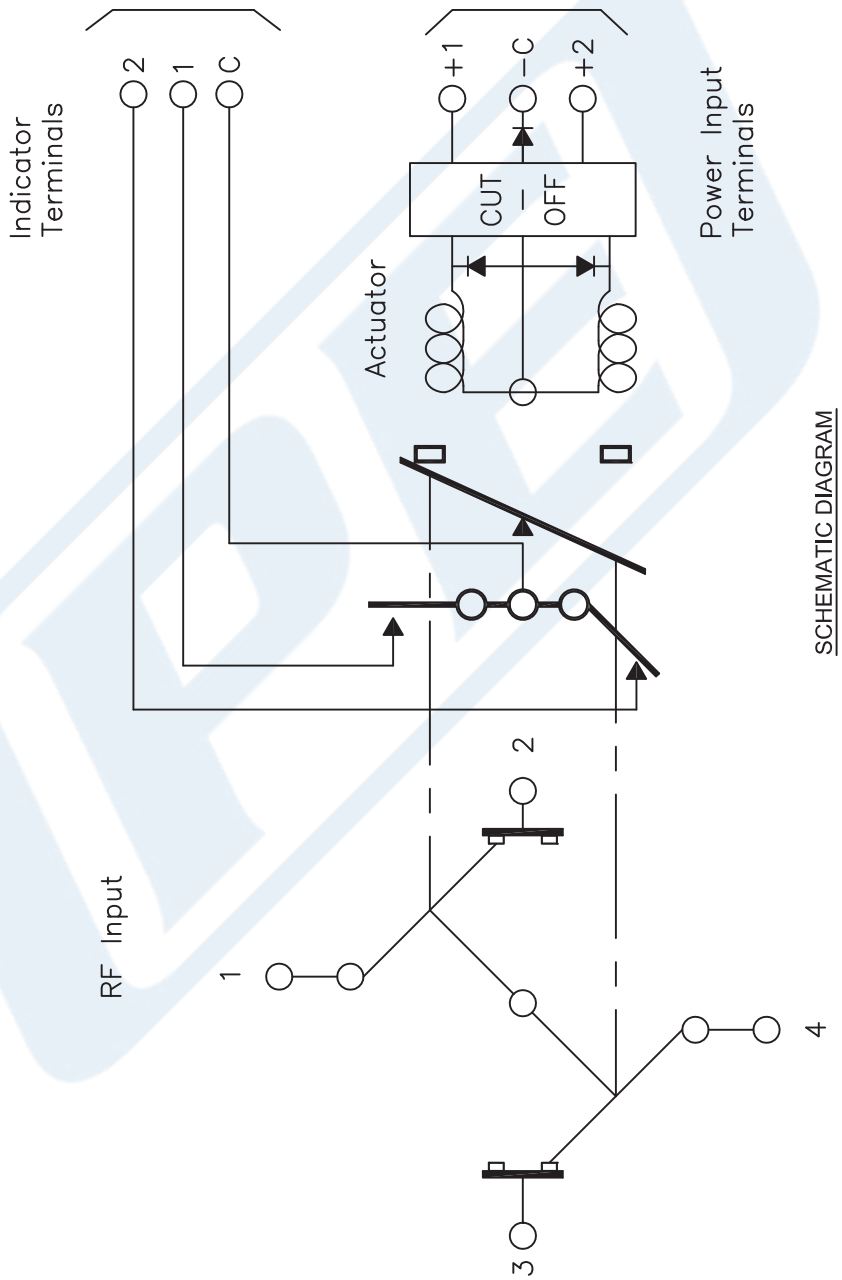

SCHEMATIC DIAGRAM

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE **PE71S6071**

FSCM NO. 53919 | CAD FILE 081514 | SCALE N/A | SIZE A | 150

PASTERNACK® THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

© 2015 Pasternack Enterprises All Rights Reserved