

## WS72144

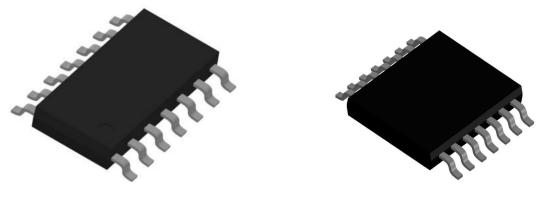
### 300nA Nano-Power Rail-to-Rail Input Output Operational Amplifiers

[Http://www.willsemi.com](http://www.willsemi.com)

#### Descriptions

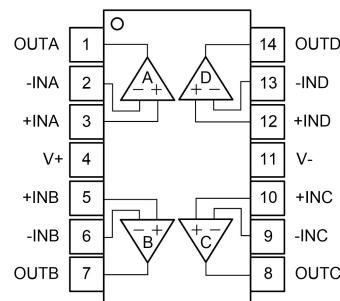
The WS72144 is a quad low-voltage operational amplifier with rail-to-rail input/output swing. Ultra low power makes this amplifier ideal for battery-powered and portable applications. The WS72144 has a gain-bandwidth product of 13kHz (TYP) and is unity gain stable. These specifications make this operational amplifier appropriate for low frequency applications, such as battery current monitoring and sensor conditioning.

WS72144 is available with MSL 3 Level in SOP-14L package and TSSOP-14L package. Standard products are Pb-Free and halogen-Free.



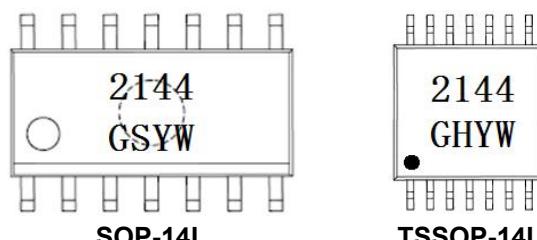
SOP-14L

TSSOP-14L



SOP-14L/TSSOP-14L

Pin configuration (Top view)



SOP-14L

TSSOP-14L

#### Marking

2144 = Device code

GS = Special code

GH = Special code

Y = Year code

W = Week code

#### Order Information

Device	Package	Shipping
WS72144S-14/TR	SOP-14L	4000/Reel & Tape
WS72144H-14/TR	TSSOP-14L	4000/Reel & Tape

#### Features

- Wide Supply Voltage : 1.6~5.5V
- Quiescent Current per Amplifier : 300nA Typical
- GBWP : 13kHz
- Rail-to-Rail Input/Output Swing
- Unity Gain Stable
- -40°C to 125°C Operation Temperature Range
- Available in Green SOP-14L and TSSOP-14L Packages

## Pin Descriptions

Pin Number	Symbol	Descriptions
1	OUTA	Output
2	-INA	Inverting input
3	+INA	Non-inverting input
4	V+	Positive supply
5	+INB	Non-inverting input
6	-INB	Inverting input
7	OUTB	Output
8	OUTC	Output
9	-INC	Inverting input
10	+INC	Non-inverting input
11	V-	Negative supply
12	+IND	Non-inverting input
13	-IND	Inverting input
14	OUTD	Output

## Absolute Maximum Ratings<sup>(1)</sup>

Parameter	Symbol	Value	Unit
Supply Voltage, ( $[V_+] - [V_-]$ )	$V_S^{(2)}$	6	V
Input Common Mode Voltage Range	$V_{ICR}$	( $V_-$ )-0.3 to ( $V_+$ )+0.3	V
Output Short-Circuit Duration	$t_{SO}^{(3)}$	Unlimited	/
Operating Fee-Air Temperature Range	$T_A$	-40 to 125	°C
Storage Temperature Range	$T_{STG}$	-65 to 150	°C
Junction Temperature Range	$T_J$	150	°C
Lead Temperature Range	$T_L$	260	°C

### Note:

1. Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are only stress ratings, and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions are not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
2. All voltage values, except differential voltage are with respect to network terminal.
3. A heat sink may be required to keep the junction temperature below the absolute maximum, depends on the power supply voltage and how many amplifiers are shorted. Thermal resistance varies the amount of PC board metal connected to the package. The specified values are for short traces connected to leads.

## ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition	Minimum level	Unit
HBM	Human Body Model ESD	MIL-STD-883H Method 3015.8 JEDEC-EIA/JESD22-A114A	±8000	V
CDM	Charged Device Model ESD	JEDEC-EIA/JESD22-C101E	±2000	V
MM	Machine Model ESD	JEDEC-EIA/JESD22-A115	±400	V

## Electronics Characteristics

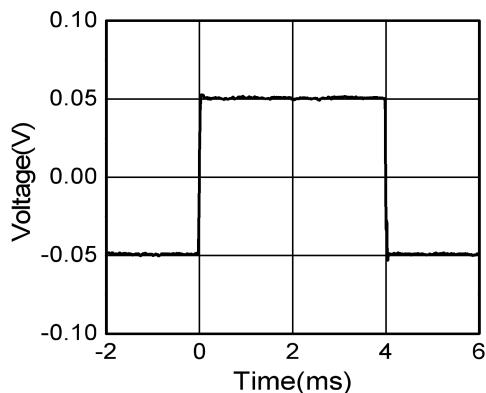
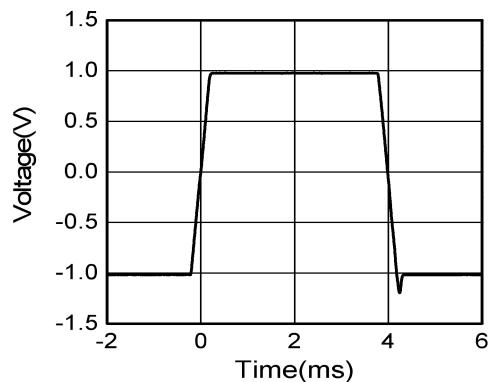
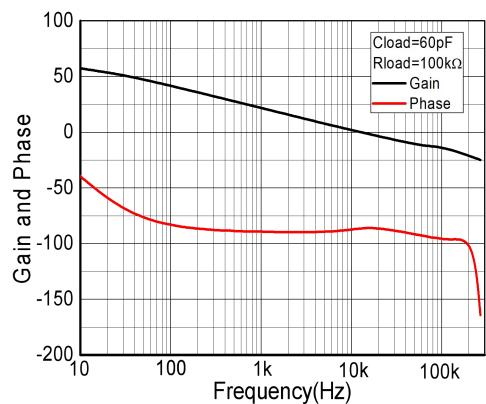
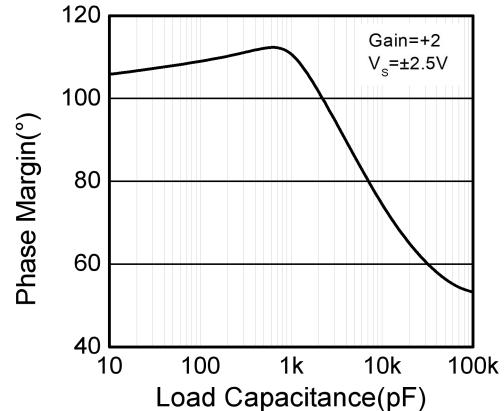
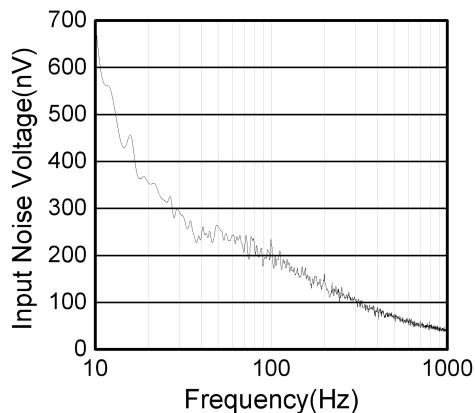
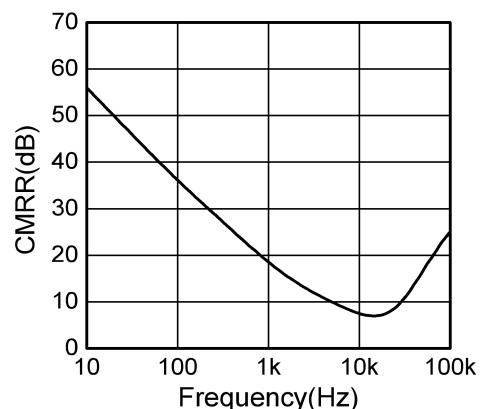
The \*denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 27^\circ\text{C}$ .  $V_S = 5\text{V}$ ,  $V_{CM} = V_{OUT} = V_S/2$ ,  $R_{load} = 100\text{k}\Omega$ ,  $C_{load} = 60\text{pF}$ .

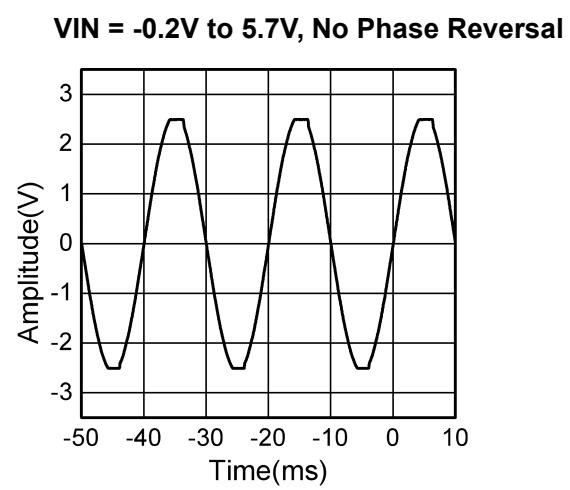
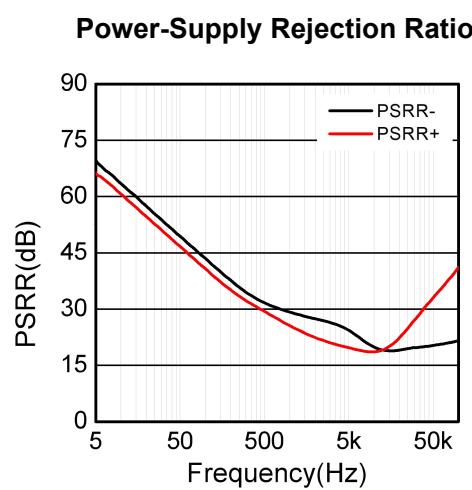
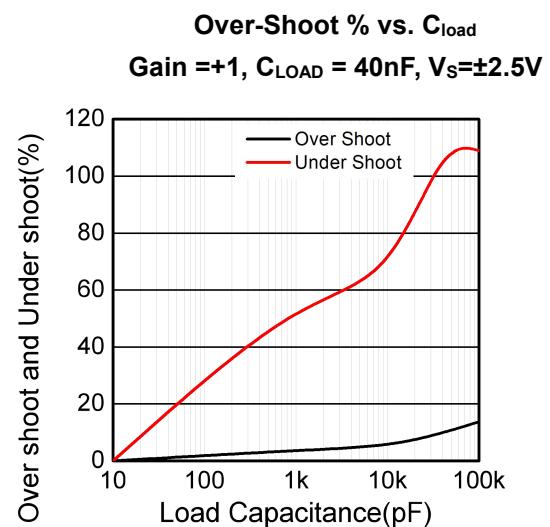
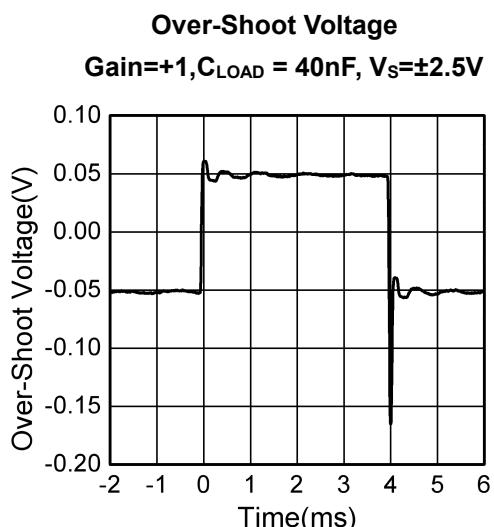
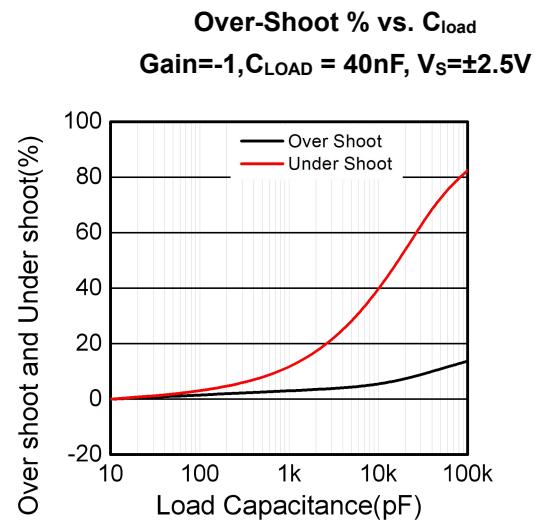
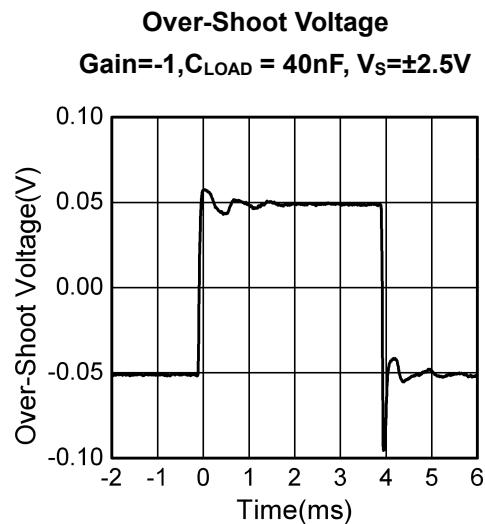
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$V_{OS}$	Input Offset Voltage	$V_{CM}=V_S/2$ and $V_{CM}=\text{GND}$	*	-3.0	$\pm 0.1$	3.0
$\alpha_{VOS}$	Input Offset Voltage Drift			1.6		$\mu\text{V}/^\circ\text{C}$
$I_{IB}$	Input Bias Current			<10		pA
$I_{OS}$	Input Offset Current			<10		pA
$V_n$	Input Voltage Noise	f=0.1Hz to 10Hz		8		$\mu\text{V}_{\text{P-P}}$
$e_n$	Input Voltage Noise Density	f=1kHz		80		nV/ $\sqrt{\text{Hz}}$
$R_{IN}$	Input Resistance			>1		T $\Omega$
CMRR	Common Mode Rejection Ratio	$V_{CM}=0.1\text{V}$ to 4.9V	*	55	75	dB
$V_{CM}$	Common Mode Input Voltage Range		*	(V-)-0.3	(V+)+0.3	V
PSRR	Power Supply Rejection Ratio		*	65	91	dB
$A_{VOL}$	Open Loop Large Signal Gain	$V_{OUT}=2.5\text{V}, R_{load}=100\text{k}\Omega$		118		dB
		$V_{OUT}=0.1\text{V}$ to 4.9V, $R_{load}=100\text{k}\Omega$	*	85	118	dB
$V_{OL}, V_{OH}$	Output Swing from Supply Rail	$R_{load}=100\text{k}\Omega$		5		mV
$R_{OUT}$	Closed-Loop Output Impedance	$G=1, f=1\text{kHz}, I_{OUT}=0$		4.3		$\Omega$
$I_{SC}$	Output Short-Circuit Current	Sink or Source Current	10	15		mA
$V_{DD}$	Supply Voltage		1.6		5.5	V
$I_Q$	Quiescent Current per Amplifier		*	300	450	nA
PM	Phase Margin	$R_{load}=100\text{k}\Omega, C_{load}=60\text{pF}$		80		degrees
GM	Gain Margin	$R_{load}=100\text{k}\Omega, C_{load}=60\text{pF}$		18		dB
GBWP	Gain-Bandwidth Product	f=1kHz		13		kHz
$t_s$	Settling Time	1.5 to 3.5V, Unity Gain	0.1%		0.4	ms
		2.45 to 2.55V, Unity Gain	0.1%		0.04	
SR	Slew Rate	$A_v=1, V_{OUT}=1.5\text{V}$ to 3.5V, $R_{load}=100\text{k}\Omega, C_{load}=60\text{pF}$		5		$\text{mV}/\mu\text{s}$
FPBW	Full Power Bandwidth <sup>Note1</sup>	$2V_{\text{P-P}}$		300		Hz

### Note:

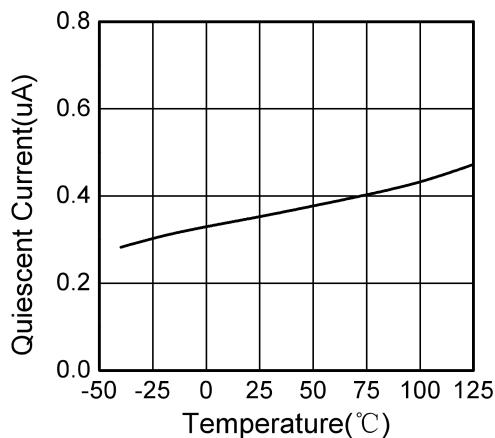
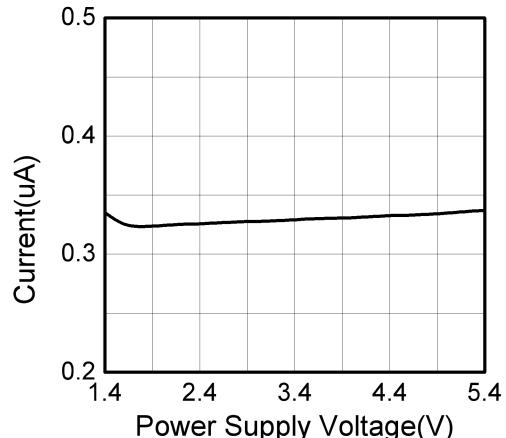
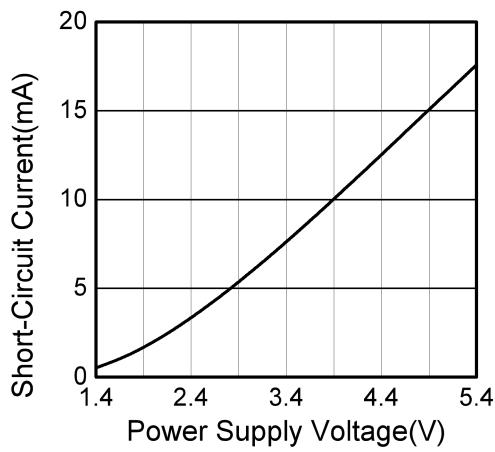
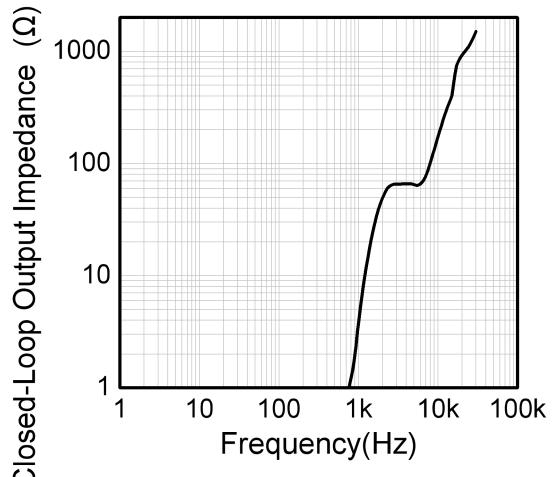
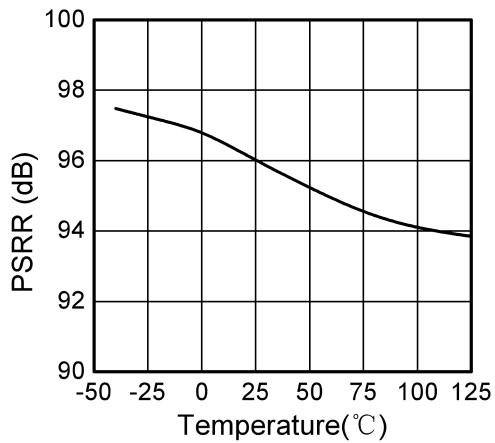
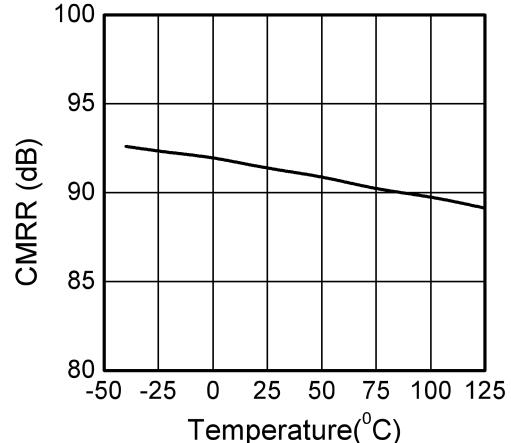
1. Full power bandwidth is calculated from the slew rate  $\text{FPBW} = \text{SR}/(\pi \cdot V_{\text{P-P}})$ .

**Typical Characteristics**
 $T_A=25^\circ\text{C}$ ,  $V_s=5\text{V}$ ,  $V_{CM}=V_s/2$ , unless otherwise noted

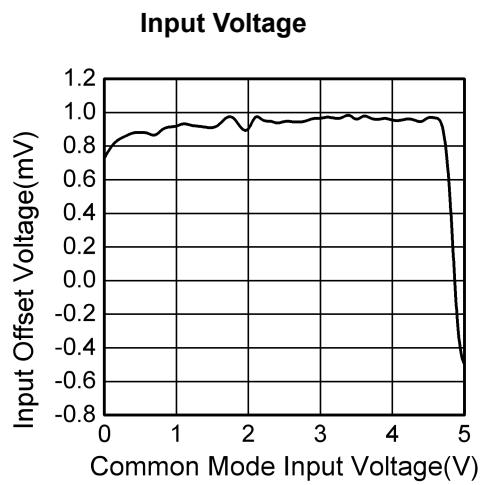
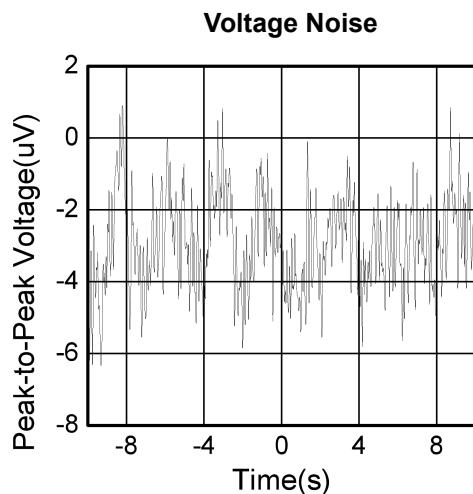
**Small-Signal Step Response, 100mV Step**

**Large-Signal Step Response, 2V Step**

**Open-Loop Gain and Phase**

**Phase Margin vs.  $C_{load}$  (Stable for Any  $C_{load}$ )**

**Input Voltage Noise Spectral Density**

**CMRR vs. Frequency**


**Typical Characteristics (continued)**
 $T_A=25^\circ\text{C}$ ,  $V_S=5\text{V}$ ,  $V_{CM}=V_S/2$ , unless otherwise noted


**Typical Characteristics (continued)**
 $T_A=25^\circ\text{C}$ ,  $V_S=5\text{V}$ ,  $V_{CM}=V_S/2$ , unless otherwise noted

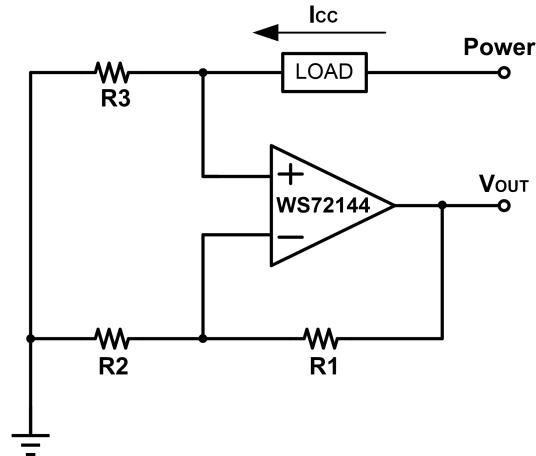
**Quiescent Supply Current vs. Temperature**

**Quiescent Supply Current vs. Supply Voltage**

**Short-Circuit Current vs. Supply Voltage**

**Closed-Loop Output Impedance vs. Frequency**

**PSRR vs. Frequency**

**CMRR vs. Temperature**


**Typical Characteristics (continued)**
 $T_A=25^\circ\text{C}$ ,  $V_S=5\text{V}$ ,  $V_{CM}=V_S/2$ , unless otherwise noted

**Input Offset Voltage vs. Common Mode**

**0.1Hz to 10Hz Time Domain Output**


## Application Circuit

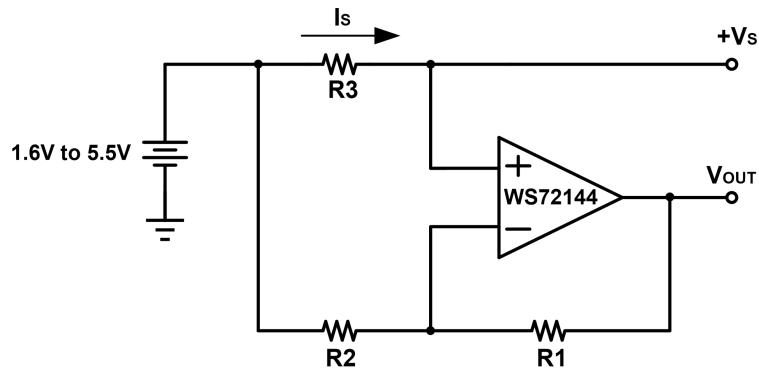
### (1) WS72144 in Low Side Battery Current Sensor



**Application Circuit for Low Side Battery Current Sensor**

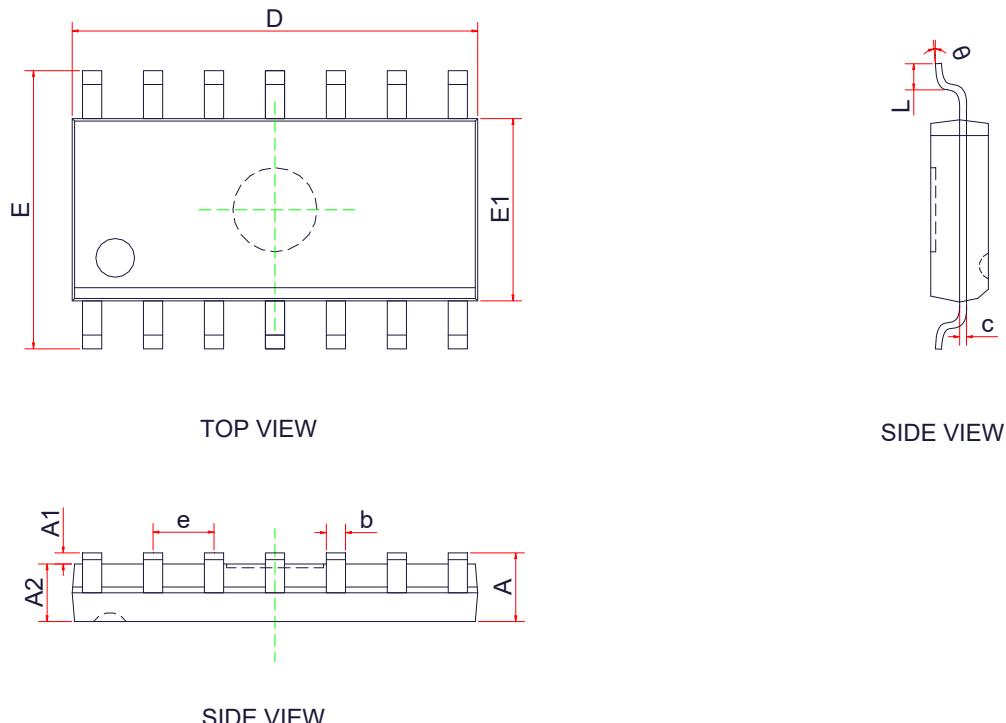
$$V_{OUT} = I_{CC} \times R_3 \times \left( \frac{R_1}{R_2} + 1 \right)$$

### (2) WS72144 in High Side Battery Current Sensor

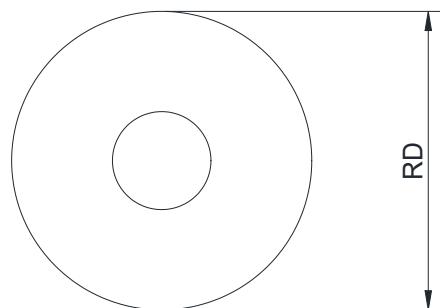
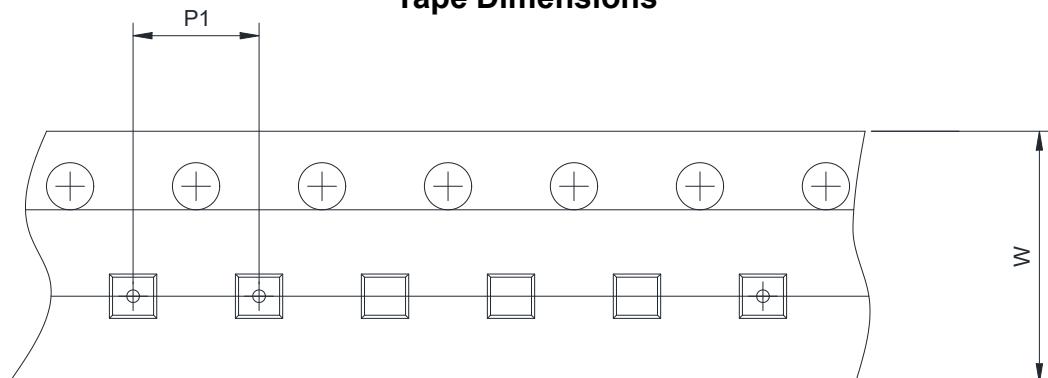
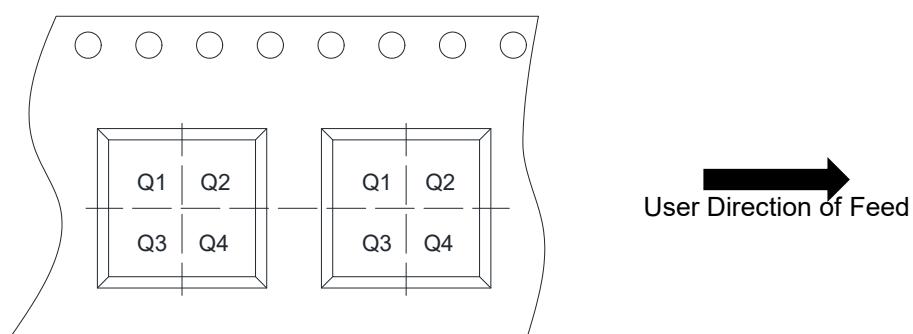


**Application Circuit for High Side Battery Current Sensor**

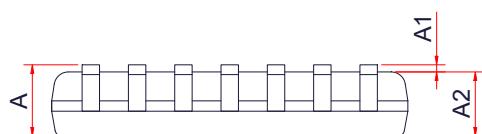
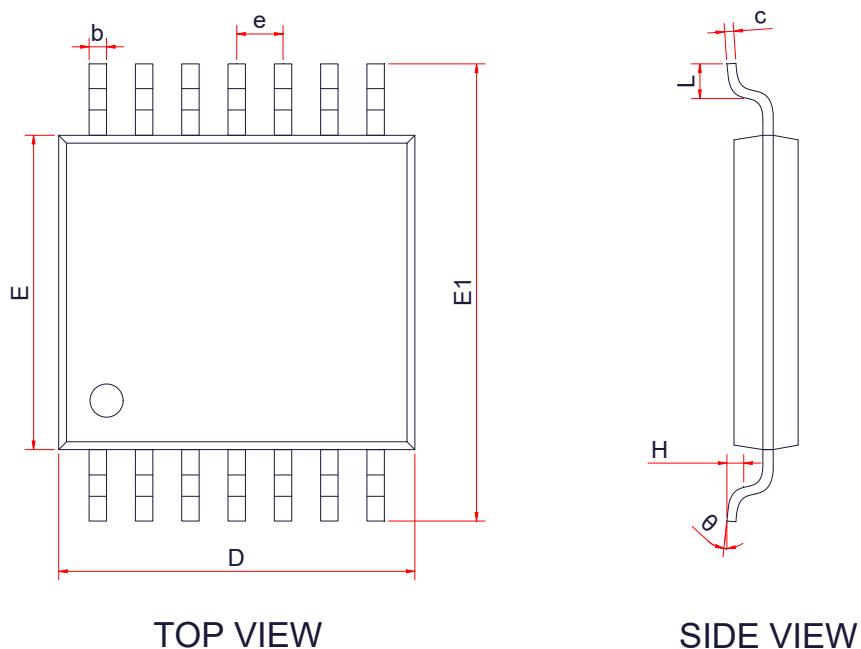
$$I_S = \frac{+V_S - V_{OUT}}{R_1 \times R_3 \div R_2}$$

**PACKAGE OUTLINE DIMENSIONS**
**SOP-14L**


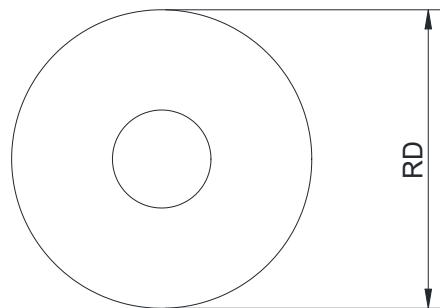
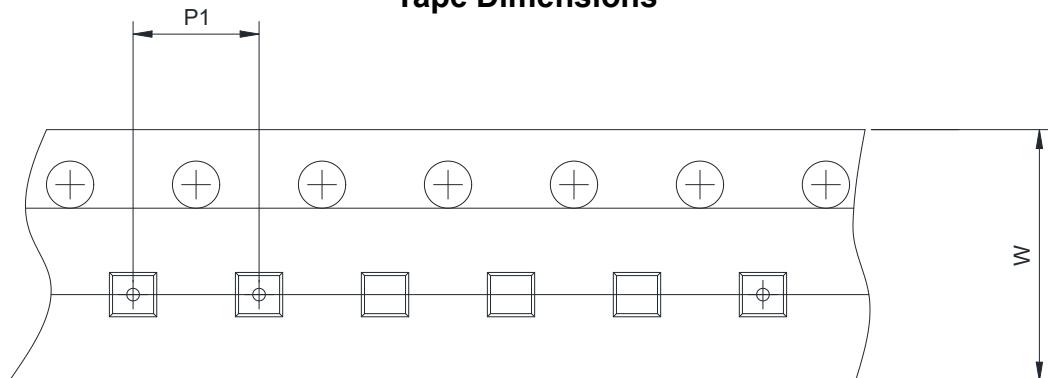
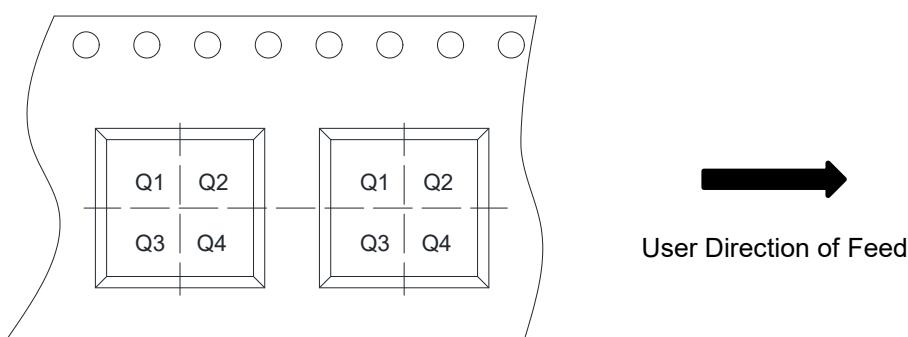
Symbol	Dimensions In Millimeters (mm)		
	Min.	Typ.	Max.
A	-	-	1.75
A1	0.10	-	0.25
A2	1.25	-	-
b	0.31	0.41	0.51
c	0.10	-	0.25
D	8.45	8.65	8.85
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27 BSC		
L	0.40	-	1.27
θ	0°	-	8°

**TAPE AND REEL INFORMATION**
**SOP-14L**
**Reel Dimensions**

**Tape Dimensions**

**Quadrant Assignments For PIN1 Orientation In Tape**


RD	Reel Dimension	<input type="checkbox"/> 7inch <input checked="" type="checkbox"/> 13inch
W	Overall width of the carrier tape	<input type="checkbox"/> 8mm <input type="checkbox"/> 12mm <input checked="" type="checkbox"/> 16mm
P1	Pitch between successive cavity centers	<input type="checkbox"/> 2mm <input type="checkbox"/> 4mm <input checked="" type="checkbox"/> 8mm
Pin1	Pin1 Quadrant	<input checked="" type="checkbox"/> Q1 <input type="checkbox"/> Q2 <input type="checkbox"/> Q3 <input type="checkbox"/> Q4

**PACKAGE OUTLINE DIMENSIONS**
**TSSOP-14L**

**SIDE VIEW**

Symbol	Dimensions in Millimeters		
	Min.	Typ.	Max.
A	-	-	1.20
A1	0.05	-	0.15
A2	0.80	0.90	1.00
b	0.19	-	0.30
c	0.09	-	0.20
D	4.90	5.00	5.10
E	4.30	4.40	4.50
E1	6.25	6.40	6.55
e	0.65 BSC		
L	0.50	0.60	0.70
H	0.25Typ		
θ	1 °	-	7 °

**TAPE AND REEL INFORMATION**
**TSSOP-14L**
**Reel Dimensions**

**Tape Dimensions**

**Quadrant Assignments For PIN1 Orientation In Tape**


RD	Reel Dimension	<input type="checkbox"/> 7inch <input checked="" type="checkbox"/> 13inch
W	Overall width of the carrier tape	<input type="checkbox"/> 8mm <input checked="" type="checkbox"/> 12mm <input type="checkbox"/> 16mm
P1	Pitch between successive cavity centers	<input type="checkbox"/> 2mm <input type="checkbox"/> 4mm <input checked="" type="checkbox"/> 8mm
Pin1	Pin1 Quadrant	<input checked="" type="checkbox"/> Q1 <input type="checkbox"/> Q2 <input type="checkbox"/> Q3 <input type="checkbox"/> Q4