
80C186EB/80C188EB AND 80L186EB/80L188EB 16-BIT HIGH-INTEGRATION EMBEDDED PROCESSORS

- **Full Static Operation**
- **True CMOS Inputs and Outputs**

- **Integrated Feature Set**
  - **Low-Power Static CPU Core**
  - **Two Independent UARTs each with an Integral Baud Rate Generator**
  - **Two 8-Bit Multiplexed I/O Ports**
  - **Programmable Interrupt Controller**
  - **Three Programmable 16-Bit Timer/Counters**
  - **Clock Generator**
  - **Ten Programmable Chip Selects with Integral Wait-State Generator**
  - **Memory Refresh Control Unit**
  - **System Level Testing Support (ONCE Mode)**
- **Direct Addressing Capability to 1 Mbyte Memory and 64 Kbyte I/O**
- **Speed Versions Available (5V):**
  - **25 MHz (80C186EB25/80C188EB25)**
  - **20 MHz (80C186EB20/80C188EB20)**
  - **13 MHz (80C186EB13/80C188EB13)**
- **Available in Extended Temperature Range (−40°C to +85°C)**
- **Speed Versions Available (3V):**
  - **16 MHz (80L186EB16/80L188EB16)**
  - **13 MHz (80L186EB13/80L188EB13)**
- **Low-Power Operating Modes:**
  - **Idle Mode Freezes CPU Clocks but keeps Peripherals Active**
  - **Powerdown Mode Freezes All Internal Clocks**
- **Supports 80C187 Numeric Coprocessor Interface (80C186EB PLCC Only)**
- **Available In:**
  - **80-Pin Quad Flat Pack (QFP)**
  - **84-Pin Plastic Leaded Chip Carrier (PLCC)**
  - **80-Pin Shrink Quad Flat Pack (SQFP)**

The 80C186EB is a second generation CHMOS High-Integration microprocessor. It has features that are new to the 80C186 family and include a STATIC CPU core, an enhanced Chip Select decode unit, two independent Serial Channels, I/O ports, and the capability of Idle or Powerdown low power modes.

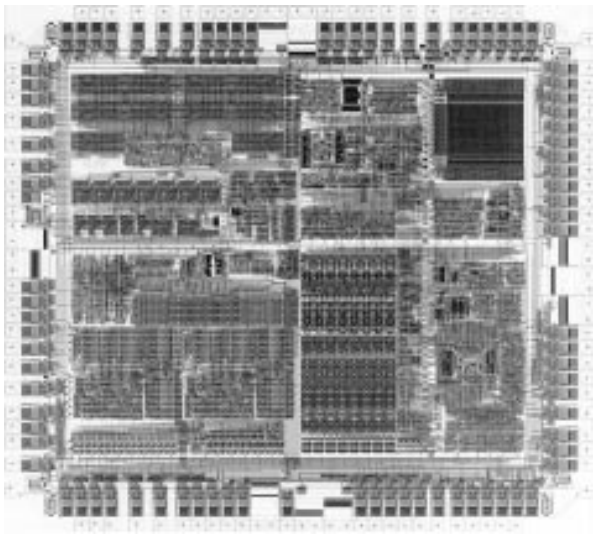

272433–1

*Other brands and names are the property of their respective owners.
Information in this document is provided in connection with Intel products. Intel assumes no liability whatsoever, including infringement of any patent or copyright, for sale and use of Intel products except as provided in Intel's Terms and Conditions of Sale for such products. Intel retains the right to make changes to these specifications at any time, without notice. Microcomputer Products may have minor variations to this specification known as errata.

June, 2002 **Order Number: 272433-005**

COPYRIGHT © INTEL CORPORATION, 2002

80C186EB/80C188EB and 80L186EB/80L188EB 16-Bit High-Integration Embedded Processors

CONTENTS

PAGE

INTRODUCTION 4

CORE ARCHITECTURE 4
Bus Interface Unit 4
Clock Generator 4

80C186EC PERIPHERAL ARCHITECTURE 5
Interrupt Control Unit 5
Timer/Counter Unit 5
Serial Communications Unit 7
Chip-Select Unit 7
I/O Port Unit 7
Refresh Control Unit 7
Power Management Unit 7
80C187 Interface (80C186EB Only) 7
ONCE Test Mode 7

PACKAGE INFORMATION 8
Prefix Identification 8
Pin Descriptions 8

80C186EB PINOUT 14

PACKAGE THERMAL SPECIFICATIONS 22

ELECTRICAL SPECIFICATIONS 23
Absolute Maximum Ratings 23

CONTENTS

PAGE

Recommended Connections 23

DC SPECIFICATIONS 24
I_{CC} versus Frequency and Voltage 27
PDTMR Pin Delay Calculation 27

AC SPECIFICATIONS 28
AC Characteristics—80C186EB25 28
AC Characteristics—80C186EB20/13 30
AC Characteristics—80L186EB16 32
Relative Timings 36
Serial Port Mode 0 Timings 37

AC TEST CONDITIONS 38

AC TIMING WAVEFORMS 38

DERATING CURVES 41

RESET 42


BUS CYCLE WAVEFORMS 45

EXECUTION TIMINGS 52

INSTRUCTION SET SUMMARY 53

ERRATA 59

REVISION HISTORY 59

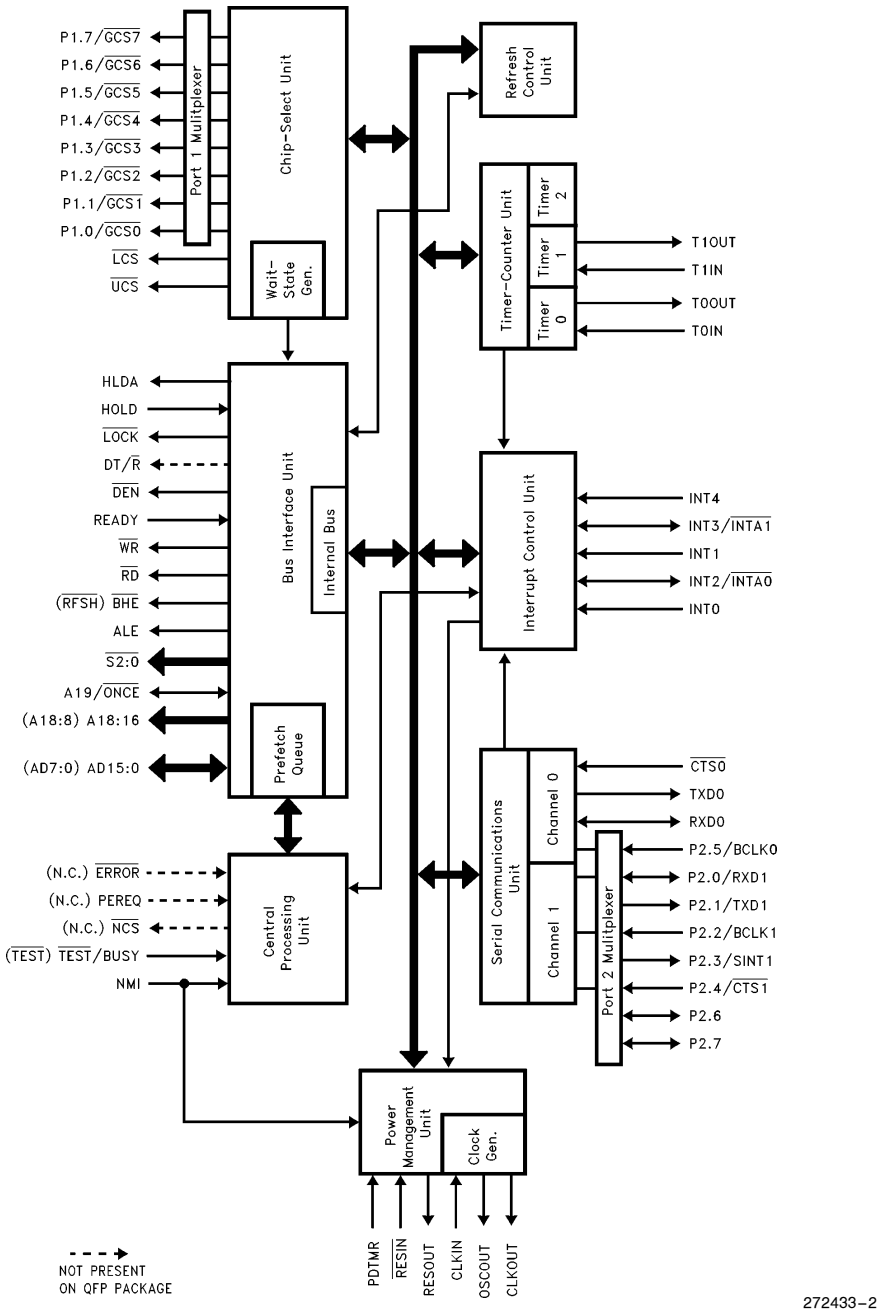

NOTE:
Pin names in parentheses apply to the 80C188EB/80L188EB

Figure 1. 80C186EB/80C188EB Block Diagram

INTRODUCTION

Unless specifically noted, all references to the 80C186EB apply to the 80C188EB, 80L186EB, and 80L188EB. References to pins that differ between the 80C186EB/80L186EB and the 80C188EB/80L188EB are given in parentheses. The ''L'' in the part number denotes low voltage operation. Physically and functionally, the ''C'' and ''L'' devices are identical.

The 80C186EB is the first product in a new generation of low-power, high-integration microprocessors. It enhances the existing 186 family by offering new features and new operating modes. The 80C186EB is object code compatible with the 80C186XL/80C188XL microprocessors.

The 80L186EB is the 3V version of the 80C186EB. The 80L186EB is functionally identical to the 80C186EB embedded processor. Current 80C186EB users can easily upgrade their designs to use the 80L186EB and benefit from the reduced power consumption inherent in 3V operation.

The feature set of the 80C186EB meets the needs of low power, space critical applications. Low-Power applications benefit from the static design of the CPU core and the integrated peripherals as well as low voltage operation. Minimum current consumption is achieved by providing a Powerdown mode that halts operation of the device, and freezes the clock circuits. Peripheral design enhancements ensure that non-initialized peripherals consume little current.

Space critical applications benefit from the integration of commonly used system peripherals. Two serial channels are provided for services such as diagnostics, inter-processor communication, modem interface, terminal display interface, and many others. A flexible chip select unit simplifies memory and peripheral interfacing. The interrupt unit provides sources for up to 129 external interrupts and will prioritize these interrupts with those generated from the on-chip peripherals. Three general purpose timer/counters and sixteen multiplexed I/O port pins round out the feature set of the 80C186EB.

Figure 1 shows a block diagram of the 80C186EB/80C188EB. The Execution Unit (EU) is an enhanced 8086 CPU core that includes: dedicated hardware to speed up effective address calculations, enhance execution speed for multiple-bit shift and rotate instructions and for multiply and divide instructions, string move instructions that operate at full bus bandwidth, ten new instruction, and fully static operation. The Bus Interface Unit (BIU) is the same as that found on the original 186 family products, except the queue status mode has been deleted and buffer interface control has been changed to ease system design timings. An independent internal bus is used to allow communication between the BIU and internal peripherals.

CORE ARCHITECTURE

Bus Interface Unit

The 80C186EB core incorporates a bus controller that generates local bus control signals. In addition, it employs a HOLD/HLDA protocol to share the local bus with other bus masters.

The bus controller is responsible for generating 20 bits of address, read and write strobes, bus cycle status information, and data (for write operations) information. It is also responsible for reading data off the local bus during a read operation. A READY input pin is provided to extend a bus cycle beyond the minimum four states (clocks).


The local bus controller also generates two control signals ($\overline{DEN}$ and DT/$\overline{R}$) when interfacing to external transceiver chips. (Both $\overline{DEN}$ and DT/$\overline{R}$ are available on the PLCC devices, only $\overline{DEN}$ is available on the QFP and SQFP devices.) This capability allows the addition of transceivers for simple buffering of the multiplexed address/data bus.

Clock Generator


The processor provides an on-chip clock generator for both internal and external clock generation. The clock generator features a crystal oscillator, a divide-by-two counter, and two low-power operating modes.

The oscillator circuit is designed to be used with either a **parallel resonant** fundamental or third-overtone mode crystal network. Alternatively, the oscillator circuit may be driven from an external clock source. Figure 2 shows the various operating modes of the oscillator circuit.

The crystal or clock frequency chosen must be twice the required processor operating frequency due to the internal divide-by-two counter. This counter is used to drive all internal phase clocks and the external CLKOUT signal. CLKOUT is a 50% duty cycle processor clock and can be used to drive other system components. All AC timings are referenced to CLKOUT.



(A) Crystal Connection

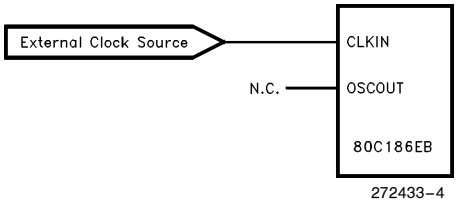

(B) Clock Connection

NOTE:
The L_1C_1 network is **only** required when using a third-overtone crystal.

Figure 2. Clock Configurations

The following parameters are recommended when choosing a crystal:

Temperature Range:	Application Specific
ESR (Equivalent Series Resistance):	40Ω max
C0 (Shunt Capacitance of Crystal):	7.0 pF max
C_L (Load Capacitance):	20 pF ± 2 pF
Drive Level:	1 mW max

80C186EB PERIPHERAL ARCHITECTURE

The 80C186EB has integrated several common system peripherals with a CPU core to create a compact, yet powerful system. The integrated peripherals are designed to be flexible and provide logical interconnections between supporting units (e.g., the interrupt control unit supports interrupt requests from the timer/counters or serial channels).

The list of integrated peripherals includes:

- 7-Input Interrupt Control Unit
- 3-Channel Timer/Counter Unit
- 2-Channel Serial Communications Unit
- 10-Output Chip-Select Unit
- I/O Port Unit
- Refresh Control Unit
- Power Management Unit

The registers associated with each integrated peripheral are contained within a 128 x 16 register file called the Peripheral Control Block (PCB). The PCB can be located in either memory or I/O space on any 256 Byte address boundary.

Figure 3 provides a list of the registers associated with the PCB. The Register Bit Summary at the end of this specification individually lists all of the registers and identifies each of their programming attributes.

Interrupt Control Unit

The 80C186EB can receive interrupts from a number of sources, both internal and external. The interrupt control unit serves to merge these requests on a priority basis, for individual service by the CPU. Each interrupt source can be independently masked by the Interrupt Control Unit (ICU) or all interrupts can be globally masked by the CPU.

Internal interrupt sources include the Timers and Serial channel 0. External interrupt sources come from the five input pins INT4:0. The NMI interrupt pin is not controlled by the ICU and is passed directly to the CPU. Although the Timer and Serial channel each have only one request input to the ICU, separate vector types are generated to service individual interrupts within the Timer and Serial channel units.

Timer/Counter Unit

The 80C186EB Timer/Counter Unit (TCU) provides three 16-bit programmable timers. Two of these are highly flexible and are connected to external pins for control or clocking. A third timer is not connected to any external pins and can only be clocked internally. However, it can be used to clock the other two timer channels. The TCU can be used to count external events, time external events, generate non-repetitive waveforms, generate timed interrupts. etc.

PCB Offset	Function
00H	Reserved
02H	End Of Interrupt
04H	Poll
06H	Poll Status
08H	Interrupt Mask
0AH	Priority Mask
0CH	In-Service
0EH	Interrupt Request
10H	Interrupt Status
12H	Timer Control
14H	Serial Control
16H	INT4 Control
18H	INT0 Control
1AH	INT1 Control
1CH	INT2 Control
1EH	INT3 Control
20H	Reserved
22H	Reserved
24H	Reserved
26H	Reserved
28H	Reserved
2AH	Reserved
2CH	Reserved
2EH	Reserved
30H	Timer0 Count
32H	Timer0 Compare A
34H	Timer0 Compare B
36H	Timer0 Control
38H	Timer1 Count
3AH	Timer1 Compare A
3CH	Timer1 Compare B
3EH	Timer1 Control

PCB Offset	Function
40H	Timer2 Count
42H	Timer2 Compare
44H	Reserved
46H	Timer2 Control
48H	Reserved
4AH	Reserved
4CH	Reserved
4EH	Reserved
50H	Port 1 Direction
52H	Port 1 Pin
54H	Port 1 Control
56H	Port 1 Latch
58H	Port 2 Direction
5AH	Port 2 Pin
5CH	Port 2 Control
5EH	Port 2 Latch
60H	Serial0 Baud
62H	Serial0 Count
64H	Serial0 Control
66H	Serial0 Status
68H	Serial0 RBUF
6AH	Serial0 TBUF
6CH	Reserved
6EH	Reserved
70H	Serial1 Baud
72H	Serial1 Count
74H	Serial1 Control
76H	Serial1 Status
78H	Serial1 RBUF
7AH	Serial1 TBUF
7CH	Reserved
7EH	Reserved

PCB Offset	Function
80H	GCS0 Start
82H	GCS0 Stop
84H	GCS1 Start
86H	GCS1 Stop
88H	GCS2 Start
8AH	GCS2 Stop
8CH	GCS3 Start
8EH	GCS3 Stop
90H	GCS4 Start
92H	GCS4 Stop
94H	GCS5 Start
96H	GCS5 Stop
98H	GCS6 Start
9AH	GCS6 Stop
9CH	GCS7 Start
9EH	GCS7 Stop
A0H	LCS Start
A2H	LCS Stop
A4H	UCS Start
A6H	UCS Stop
A8H	Relocation
AAH	Reserved
ACH	Reserved
AEH	Reserved
B0H	Refresh Base
B2H	Refresh Time
B4H	Refresh Control
B6H	Reserved
B8H	Power Control
BAH	Reserved
BCH	Step ID
BEH	Reserved

PCB Offset	Function
C0H	Reserved
C2H	Reserved
C4H	Reserved
C6H	Reserved
C8H	Reserved
CAH	Reserved
CCH	Reserved
CEH	Reserved
D0H	Reserved
D2H	Reserved
D4H	Reserved
D6H	Reserved
D8H	Reserved
DAH	Reserved
DCH	Reserved
DEH	Reserved
E0H	Reserved
E2H	Reserved
E4H	Reserved
E6H	Reserved
E8H	Reserved
EAH	Reserved
ECH	Reserved
EEH	Reserved
F0H	Reserved
F2H	Reserved
F4H	Reserved
F6H	Reserved
F8H	Reserved
FAH	Reserved
FCH	Reserved
FEH	Reserved

Figure 3. Peripheral Control Block Registers

Serial Communications Unit

The Serial Control Unit (SCU) of the 80C186EB contains two independent channels. Each channel is identical in operation except that only channel 0 is supported by the integrated interrupt controller (channel 1 has an external interrupt pin). Each channel has its own baud rate generator that is independent of the Timer/Counter Unit, and can be internally or externally clocked at up to one half the 80C186EB operating frequency.

Independent baud rate generators are provided for each of the serial channels. For the asynchronous modes, the generator supplies an 8x baud clock to both the receive and transmit register logic. A 1x baud clock is provided in the synchronous mode.

Chip-Select Unit

The 80C186EB Chip-Select Unit (CSU) integrates logic which provides up to ten programmable chip-selects to access both memories and peripherals. In addition, each chip-select can be programmed to automatically insert additional clocks (wait-states) into the current bus cycle and automatically terminate a bus cycle independent of the condition of the READY input pin.

I/O Port Unit

The I/O Port Unit (IPU) on the 80C186EB supports two 8-bit channels of input, output, or input/output operation. Port 1 is multiplexed with the chip select pins and is output only. Most of Port 2 is multiplexed with the serial channel pins. Port 2 pins are limited to either an output or input function depending on the operation of the serial pin it is multiplexed with.

Refresh Control Unit

The Refresh Control Unit (RCU) automatically generates a periodic memory read bus cycle to keep dynamic or pseudo-static memory refreshed. A 9-bit counter controls the number of clocks between refresh requests.

A 12-bit address generator is maintained by the RCU and is presented on the A12:1 address lines during the refresh bus cycle. Address bits A19:13 are programmable to allow the refresh address block to be located on any 8 Kbyte boundary.

Power Management Unit

The 80C186EB Power Management Unit (PMU) is provided to control the power consumption of the device. The PMU provides three power modes: Active, Idle, and Powerdown.

Active Mode indicates that all units on the 80C186EB are functional and the device consumes maximum power (depending on the level of peripheral operation). Idle Mode freezes the clocks of the Execution and Bus units at a logic zero state (all peripherals continue to operate normally).

The Powerdown mode freezes all internal clocks at a logic zero level and disables the crystal oscillator. All internal registers hold their values provided V_{CC} is maintained. Current consumption is reduced to just transistor junction leakage.

80C187 Interface (80C186EB Only)

The 80C186EB (PLCC package only) supports the direct connection of the 80C187 Numerics Coprocessor.

ONCE Test Mode

To facilitate testing and inspection of devices when fixed into a target system, the 80C186EB has a test mode available which forces all output and input/output pins to be placed in the high-impedance state. ONCE stands for "ON Circuit Emulation". The ONCE mode is selected by forcing the A19/$\overline{\text{ONCE}}$ pin LOW (0) during a processor reset (this pin is weakly held to a HIGH (1) level) while $\overline{\text{RESIN}}$ is active.

PACKAGE INFORMATION

This section describes the pins, pinouts, and thermal characteristics for the 80C186EB in the Plastic Leaded Chip Carrier (PLCC) package, Shrink Quad Flat Pack (SQFP), and Quad Flat Pack (QFP) package. For complete package specifications and information, see the Intel Packaging Outlines and Dimensions Guide (Order Number: 231369).

Prefix Identification

With the extended temperature range, operational characteristics are guaranteed over the temperature range corresponding to −40°C to +85°C ambient. Package types are identified by a two-letter prefix to the part number. The prefixes are listed in Table 1.

Table 1. Prefix Identification

Prefix	Note	Package Type	Temperature Type
TN		PLCC	Extended
TS		QFP (EIAJ)	Extended
SB	1	SQFP	Extended/Commercial
N	1	PLCC	Commercial
S	1	QFP (EIAJ)	Commercial

NOTE:
1. The 5V 25 MHz and 3V 16 MHz versions are only available in commercial temperature range corresponding to 0°C to +70°C ambient.

Pin Descriptions

Each pin or logical set of pins is described in Table 3. There are three columns for each entry in the Pin Description Table.

The **Pin Name** column contains a mnemonic that describes the pin function. Negation of the signal name (for example, $\overline{\text{RESIN}}$) denotes a signal that is active low.

The **Pin Type** column contains two kinds of information. The first symbol indicates whether a pin is power (P), ground (G), input only (I), output only (O) or input/output (I/O). Some pins have multiplexed functions (for example, A19/S6). Additional symbols indicate additional characteristics for each pin. Table 2 lists all the possible symbols for this column.

The **Input Type** column indicates the type of input (Asynchronous or Synchronous).

Asynchronous pins require that setup and hold times be met only in order to guarantee *recognition* at a particular clock edge. Synchronous pins require that setup and hold times be met to guarantee proper *operation.* For example, missing the setup or hold time for the SRDY pin (a synchronous input) will result in a system failure or lockup. Input pins may also be edge- or level-sensitive. The possible characteristics for input pins are S(E), S(L), A(E) and A(L).

The **Output States** column indicates the output state as a function of the device operating mode. Output states are dependent upon the current activity of the processor. There are four operational states that are different from regular operation: bus hold, reset, Idle Mode and Powerdown Mode. Appropriate characteristics for these states are also indicated in this column, with the legend for all possible characteristics in Table 2.

The **Pin Description** column contains a text description of each pin.

As an example, consider AD15:0. I/O signifies the pins are bidirectional. S(L) signifies that the input function is synchronous and level-sensitive. H(Z) signifies that, as outputs, the pins are high-impedance upon acknowledgement of bus hold. R(Z) signifies that the pins float during reset. P(X) signifies that the pins retain their states during Powerdown Mode.

Table 2. Pin Description Nomenclature

Symbol	Description
P	Power Pin (Apply $+V_{CC}$ Voltage)
G	Ground (Connect to V_{SS})
I	Input Only Pin
O	Output Only Pin
I/O	Input/Output Pin
S(E)	Synchronous, Edge Sensitive
S(L)	Synchronous, Level Sensitive
A(E)	Asynchronous, Edge Sensitive
A(L)	Asynchronous, Level Sensitive
H(1)	Output Driven to V_{CC} during Bus Hold
H(0)	Output Driven to V_{SS} during Bus Hold
H(Z)	Output Floats during Bus Hold
H(Q)	Output Remains Active during Bus Hold
H(X)	Output Retains Current State during Bus Hold
R(WH)	Output Weakly Held at V_{CC} during Reset
R(1)	Output Driven to V_{CC} during Reset
R(0)	Output Driven to V_{SS} during Reset
R(Z)	Output Floats during Reset
R(Q)	Output Remains Active during Reset
R(X)	Output Retains Current State during Reset
I(1)	Output Driven to V_{CC} during Idle Mode
I(0)	Output Driven to V_{SS} during Idle Mode
I(Z)	Output Floats during Idle Mode
I(Q)	Output Remains Active during Idle Mode
I(X)	Output Retains Current State during Idle Mode
P(1)	Output Driven to V_{CC} during Powerdown Mode
P(0)	Output Driven to V_{SS} during Powerdown Mode
P(Z)	Output Floats during Powerdown Mode
P(Q)	Output Remains Active during Powerdown Mode
P(X)	Output Retains Current State during Powerdown Mode

Table 3. Pin Descriptions

Pin Name	Pin Type	Input Type	Output States	Description
V_{CC}	P	—	—	**POWER** connections consist of four pins which must be shorted externally to a V_{CC} board plane.
V_{SS}	G	—	—	**GROUND** connections consist of six pins which must be shorted externally to a V_{SS} board plane.
CLKIN	I	A(E)	—	**CLocK INput** is an input for an external clock. An external oscillator operating at two times the required processor operating frequency can be connected to CLKIN. For crystal operation, CLKIN (along with OSCOUT) are the crystal connections to an internal Pierce oscillator.
OSCOUT	O	—	H(Q) R(Q) P(Q)	**OSCillator OUTput** is only used when using a crystal to generate the external clock. OSCOUT (along with CLKIN) are the crystal connections to an internal Pierce oscillator. This pin is not to be used as 2X clock output for non-crystal applications (i.e., this pin is N.C. for non-crystal applications). OSCOUT does not float in ONCE mode.
CLKOUT	O	—	H(Q) R(Q) P(Q)	**CLocK OUTput** provides a timing reference for inputs and outputs of the processor, and is one-half the input clock (CLKIN) frequency. CLKOUT has a 50% duty cycle and transistions every falling edge of CLKIN.
$\overline{RESIN}$	I	A(L)	—	**RESet IN** causes the processor to immediately terminate any bus cycle in progress and assume an initialized state. All pins will be driven to a known state, and RESOUT will also be driven active. The rising edge (low-to-high) transition synchronizes CLKOUT with CLKIN before the processor begins fetching opcodes at memory location 0FFFF0H.
RESOUT	O	—	H(0) R(1) P(0)	**RESet OUTput** that indicates the processor is currently in the reset state. RESOUT will remain active as long as $\overline{RESIN}$ remains active.
PDTMR	I/O	A(L)	H(WH) R(Z) P(1)	**Power-Down TiMeR** pin (normally connected to an external capacitor) that determines the amount of time the processor waits after an exit from power down before resuming normal operation. The duration of time required will depend on the startup characteristics of the crystal oscillator.
NMI	I	A(E)	—	**Non-Maskable Interrupt** input causes a TYPE-2 interrupt to be serviced by the CPU. NMI is latched internally.
$\overline{TEST}$/BUSY ($\overline{TEST}$)	I	A(E)	—	**TEST** is used during the execution of the WAIT instruction to suspend CPU operation until the pin is sampled active (LOW). $\overline{TEST}$ is alternately known as BUSY when interfacing with an 80C187 numerics coprocessor (80C186EB only).
AD15:0 (AD7:0)	I/O	S(L)	H(Z) R(Z) P(X)	These pins provide a multiplexed **Address** and **Data** bus. During the address phase of the bus cycle, address bits 0 through 15 (0 through 7 on the 80C188EB) are presented on the bus and can be latched using ALE. 8- or 16-bit data information is transferred during the data phase of the bus cycle.

NOTE:
Pin names in parentheses apply to the 80C188EB/80L188EB.

Table 3. Pin Descriptions (Continued)

Pin Name	Pin Type	Input Type	Output States	Description
A18:16 A19/$\overline{\text{ONCE}}$ (A15:A8) (A18:16) (A19/ONCE)	I/O	A(L)	H(Z) R(WH) P(X)	These pins provide multiplexed **Address** during the address phase of the bus cycle. Address bits 16 through 19 are presented on these pins and can be latched using ALE. These pins are driven to a logic 0 during the data phase of the bus cycle. On the 80C188EB, A15–A8 provide valid address information for the entire bus cycle. During a processor reset ($\overline{\text{RESIN}}$ active), A19/$\overline{\text{ONCE}}$ is used to enable ONCE mode. A18:16 must not be driven low during reset or improper operation may result.
$\overline{\text{S2:0}}$	O	—	H(Z) R(Z) P(1)	Bus cycle **Status** are encoded on these pins to provide bus transaction information. $\overline{\text{S2:0}}$ are encoded as follows: $\overline{\text{S2}}$ $\overline{\text{S1}}$ $\overline{\text{S0}}$ — **Bus Cycle Initiated** 0 0 0 — Interrupt Acknowledge 0 0 1 — Read I/O 0 1 0 — Write I/O 0 1 1 — Processor HALT 1 0 0 — Queue Instruction Fetch 1 0 1 — Read Memory 1 1 0 — Write Memory 1 1 1 — Passive (no bus activity)
ALE	O	—	H(0) R(0) P(0)	**Address Latch Enable** output is used to strobe address information into a transparent type latch during the address phase of the bus cycle.
$\overline{\text{BHE}}$ ($\overline{\text{RFSH}}$)	O	—	H(Z) R(Z) P(X)	**Byte High Enable** output to indicate that the bus cycle in progress is transferring data over the upper half of the data bus. $\overline{\text{BHE}}$ and A0 have the following logical encoding **A0** — $\overline{\text{BHE}}$ — **Encoding** (for the 80C186EB/80L186EB only) 0 — 0 — Word Transfer 0 — 1 — Even Byte Transfer 1 — 0 — Odd Byte Transfer 1 — 1 — Refresh Operation On the 80C188EB/80L188EB, $\overline{\text{RFSH}}$ is asserted low to indicate a refresh bus cycle.
$\overline{\text{RD}}$	O	—	H(Z) R(Z) P(1)	**ReaD** output signals that the accessed memory or I/O device must drive data information onto the data bus.
$\overline{\text{WR}}$	O	—	H(Z) R(Z) P(1)	**WRite** output signals that data available on the data bus are to be written into the accessed memory or I/O device.
READY	I	A(L) S(L)	—	**READY** input to signal the completion of a bus cycle. READY must be active to terminate any bus cycle, unless it is ignored by correctly programming the Chip-Select Unit.
$\overline{\text{DEN}}$	O	—	H(Z) R(Z) P(1)	**Data ENable** output to control the enable of bi-directional transceivers in a buffered system. $\overline{\text{DEN}}$ is active only when data is to be transferred on the bus.

NOTE:
Pin names in parentheses apply to the 80C188EB/80L188EB.

Table 3. Pin Descriptions (Continued)

Pin Name	Pin Type	Input Type	Output States	Description
DT/$\overline{R}$	O	—	H(Z) R(Z) P(X)	**Data Transmit/Receive** output controls the direction of a bi-directional buffer in a buffered system. DT/$\overline{R}$ is only available for the PLCC package.
$\overline{LOCK}$	O	—	H(Z) R(WH) P(1)	**LOCK** output indicates that the bus cycle in progress is not to be interrupted. The processor will not service other bus requests (such as HOLD) while $\overline{LOCK}$ is active. This pin is configured as a weakly held high input while $\overline{RESIN}$ is active and must not be driven low.
HOLD	I	A(L)	—	**HOLD** request input to signal that an external bus master wishes to gain control of the local bus. The processor will relinquish control of the local bus between instruction boundaries not conditioned by a LOCK prefix.
HLDA	O	—	H(1) R(0) P(0)	**HoLD Acknowledge** output to indicate that the processor has relinquished control of the local bus. When HLDA is asserted, the processor will (or has) floated its data bus and control signals allowing another bus master to drive the signals directly.
$\overline{NCS}$ (N.C.)	O	—	H(1) R(1) P(1)	**Numerics Coprocessor Select** output is generated when accessing a numerics coprocessor. $\overline{NCS}$ is not provided on the QFP or SQFP packages. This signal does not exist on the 80C188EB/80L188EB.
$\overline{ERROR}$ (N.C.)	I	A(L)	—	**ERROR** input that indicates the last numerics coprocessor operation resulted in an exception condition. An interrupt TYPE 16 is generated if $\overline{ERROR}$ is sampled active at the beginning of a numerics operation. $\overline{ERROR}$ is not provided on the QFP or SQFP packages. This signal does not exist on the 80C188EB/80L188EB.
PEREQ (N.C.)	I	A(L)	—	**CoProcessor REQuest** signals that a data transfer between an External Numerics Coprocessor and Memory is pending. PEREQ is not provided on the QFP or SQFP packages. This signal does not exist on the 80C188EB/80L188EB.
$\overline{UCS}$	O	—	H(1) R(1) P(1)	**Upper Chip Select** will go active whenever the address of a memory or I/O bus cycle is within the address limitations programmed by the user. After reset, $\overline{UCS}$ is configured to be active for memory accesses between 0FFC00H and 0FFFFFH.
$\overline{LCS}$	O	—	H(1) R(1) P(1)	**Lower Chip Select** will go active whenever the address of a memory bus cycle is within the address limitations programmed by the user. $\overline{LCS}$ is inactive after a reset.
P1.0/$\overline{GCS0}$ P1.1/$\overline{GCS1}$ P1.2/$\overline{GCS2}$ P1.3/$\overline{GCS3}$ P1.4/$\overline{GCS4}$ P1.5/$\overline{GCS5}$ P1.6/$\overline{GCS6}$ P1.7/$\overline{GCS7}$	O	—	H(X)/H(1) R(1) P(X)/P(1)	These pins provide a multiplexed function. If enabled, each pin can provide a **Generic Chip Select** output which will go active whenever the address of a memory or I/O bus cycle is within the address limitations programmed by the user. When not programmed as a Chip-Select, each pin may be used as a general purpose output **Port.** As an output port pin, the value of the pin can be read internally.

NOTE:
Pin names in parentheses apply to the 80C188EB/80L188EB.

Table 3. Pin Descriptions (Continued)

Pin Name	Pin Type	Input Type	Output States	Description
T0OUT T1OUT	O	—	H(Q) R(1) P(Q)	**Timer OUTput** pins can be programmed to provide a single clock or continuous waveform generation, depending on the timer mode selected.
T0IN T1IN	I	A(L) A(E)	—	**Timer INput** is used either as clock or control signals, depending on the timer mode selected.
INT0 INT1 INT4	I	A(E,L)	—	Maskable **INTerrupt** input will cause a vector to a specific Type interrupt routine. To allow interrupt expansion, INT0 and/or INT1 can be used with $\overline{\text{INTA0}}$ and $\overline{\text{INTA1}}$ to interface with an external slave controller.
INT2/$\overline{\text{INTA0}}$ INT3/$\overline{\text{INTA1}}$	I/O	A(E,L)	H(1) R(Z) P(1)	These pins provide a multiplexed function. As inputs, they provide a maskable **INTerrupt** that will cause the CPU to vector to a specific Type interrupt routine. As outputs, each is programmatically controlled to provide an INTERRUPT ACKNOWLEDGE handshake signal to allow interrupt expansion.
P2.7 P2.6	I/O	A(L)	H(X) R(Z) P(X)	BI-DIRECTIONAL, open-drain **Port** pins.
$\overline{\text{CTSO}}$ P2.4/$\overline{\text{CTS1}}$	I	A(L)	—	**Clear-To-Send** input is used to prevent the transmission of serial data on their respective TXD signal pin. $\overline{\text{CTS1}}$ is multiplexed with an input only port function.
TXD0 P2.1/TXD1	O	—	H(X)/H(Q) R(1) P(X)/P(Q)	**Transmit Data** output provides serial data information. TXD1 is multiplexed with an output only **Port** function. During synchronous serial communications, TXD will function as a clock output.
RXD0 P2.0/RXD1	I/O	A(L)	R(Z) H(Q) P(X)	**Receive Data** input accepts serial data information. RXD1 is multiplexed with an input only **Port** function. During synchronous serial communications, RXD is bi-directional and will become an output for transmission or data (TXD becomes the clock).
P2.5/BCLK0 P2.2/BCLK1	I	A(L)/A(E)	—	**Baud CLocK** input can be used as an alternate clock source for each of the integrated serial channels. BCLKx is multiplexed with an input only **Port** function, and cannot exceed a clock rate greater than one-half the operating frequency of the processor.
P2.3/SINT1	O	—	H(X)/H(Q) R(0) P(X)/P(X)	**Serial INTerrupt** output will go active to indicate serial channel 1 requires service. SINT1 is multiplexed with an output only **Port** function.

NOTE:
Pin names in parentheses apply to the 80C188EB/80L188EB.

80C186EB PINOUT

Tables 4 and 5 list the 80C186EB/80C188EB pin names with package location for the 84-pin Plastic Leaded Chip Carrier (PLCC) component. Figure 5 depicts the complete 80C186EB/80C188EB pinout (PLCC package) as viewed from the top side of the component (i.e., contacts facing down).

Tables 6 and 7 list the 80C186EB/80C188EB pin names with package location for the 80-pin Quad Flat Pack (QFP) component. Figure 6 depicts the complete 80C186EB/80C188EB (QFP package) as viewed from the top side of the component (i.e., contacts facing down).

Tables 8 and 9 list the 80186EB/80188EB pin names with package location for the 80-pin Shrink Quad Flat Pack (SQFP) component. Figure 7 depicts the complete 80C186EB/80C188EB (SQFP package) as viewed from the top side of the component (i.e., contacts facing down).

Table 4. PLCC Pin Names with Package Location

Address/Data Bus	
Name	**Location**
AD0	61
AD1	66
AD2	68
AD3	70
AD4	72
AD5	74
AD6	76
AD7	78
AD8 (A8)	62
AD9 (A9)	67
AD10 (A10)	69
AD11 (A11)	71
AD12 (A12)	73
AD13 (A13)	75
AD14 (A14)	77
AD15 (A15)	79
A16	80
A17	81
A18	82
A19/$\overline{\text{ONCE}}$	83

Bus Control	
Name	**Location**
ALE	6
$\overline{\text{BHE}}$ ($\overline{\text{RFSH}}$)	7
$\overline{\text{S0}}$	10
$\overline{\text{S1}}$	9
$\overline{\text{S2}}$	8
$\overline{\text{RD}}$	4
$\overline{\text{WR}}$	5
READY	18
$\overline{\text{DEN}}$	11
DT/$\overline{\text{R}}$	16
$\overline{\text{LOCK}}$	15
HOLD	13
HLDA	12

Power	
Name	**Location**
V_{SS}	2, 22, 43 63, 65, 84
V_{CC}	1, 23 42, 64

Processor Control	
Name	**Location**
$\overline{\text{RESIN}}$	37
RESOUT	38
CLKIN	41
OSCOUT	40
CLKOUT	44
$\overline{\text{TEST}}$/BUSY	14
$\overline{\text{NCS}}$ (N.C.)	60
PEREQ (N.C.)	39
$\overline{\text{ERROR}}$ (N.C.)	3
PDTMR	36
NMI	17
INT0	31
INT1	32
INT2/$\overline{\text{INTA0}}$	33
INT3/$\overline{\text{INTA1}}$	34
INT4	35


I/O	
Name	**Location**
$\overline{\text{UCS}}$	30
$\overline{\text{LCS}}$	29
P1.0/$\overline{\text{GCS0}}$	28
P1.1/$\overline{\text{GCS1}}$	27
P1.2/$\overline{\text{GCS2}}$	26
P1.3/$\overline{\text{GCS3}}$	25
P1.4/$\overline{\text{GCS4}}$	24
P1.5/$\overline{\text{GCS5}}$	21
P1.6/$\overline{\text{GCS6}}$	20
P1.7/$\overline{\text{GCS7}}$	19
T0OUT	45
T0IN	46
T1OUT	47
T1IN	48
RXD0	53
TXD0	52
P2.5/BCLK0	54
$\overline{\text{CTS0}}$	51
P2.0/RXD1	57
P2.1/TXD1	58
P2.2/BCLK1	59
P2.3/SINT1	55
P2.4/$\overline{\text{CTS1}}$	56
P2.6	50
P2.7	49

NOTE:
Pin names in parentheses apply to the 80C188EB/80L188EB.

Table 5. PLCC Package Locations with Pin Name

Location	Name	Location	Name	Location	Name	Location	Name
1	V_{CC}	22	V_{SS}	43	V_{SS}	64	V_{CC}
2	V_{SS}	23	V_{CC}	44	CLKOUT	65	V_{SS}
3	$\overline{\text{ERROR}}$ (N.C.)	24	P1.4/$\overline{\text{GCS4}}$	45	T0OUT	66	AD1
4	$\overline{\text{RD}}$	25	P1.3/$\overline{\text{GCS3}}$	46	T0IN	67	AD9 (A9)
5	$\overline{\text{WR}}$	26	P1.2/$\overline{\text{GCS2}}$	47	T1OUT	68	AD2
6	ALE	27	P1.1/$\overline{\text{GCS1}}$	48	T1IN	69	AD10 (A10)
7	$\overline{\text{BHE}}$ ($\overline{\text{RFSH}}$)	28	P1.0/$\overline{\text{GCS0}}$	49	P2.7	70	AD3
8	$\overline{\text{S2}}$	29	$\overline{\text{LCS}}$	50	P2.6	71	AD11 (A11)
9	$\overline{\text{S1}}$	30	$\overline{\text{UCS}}$	51	$\overline{\text{CTS0}}$	72	AD4
10	$\overline{\text{S0}}$	31	INT0	52	TXD0	73	AD12 (A12)
11	$\overline{\text{DEN}}$	32	INT1	53	RXD0	74	AD5
12	HLDA	33	INT2/$\overline{\text{INTA0}}$	54	P2.5/BCLK0	75	AD13 (A13)
13	HOLD	34	INT3/$\overline{\text{INTA1}}$	55	P2.3/SINT1	76	AD6
14	$\overline{\text{TEST}}$/BUSY	35	INT4	56	P2.4/$\overline{\text{CTS1}}$	77	AD14 (A14)
15	$\overline{\text{LOCK}}$	36	PDTMR	57	P2.0/RXD1	78	AD7
16	DT/$\overline{\text{R}}$	37	$\overline{\text{RESIN}}$	58	P2.1/TXD1	79	AD15 (A15)
17	NMI	38	RESOUT	59	P2.2/BCLK1	80	A16
18	READY	39	PEREQ (N.C.)	60	$\overline{\text{NCS}}$ (N.C.)	81	A17
19	P1.7/$\overline{\text{GCS7}}$	40	OSCOUT	61	AD0	82	A18
20	P1.6/$\overline{\text{GCS6}}$	41	CLKIN	62	AD8 (A8)	83	A19/$\overline{\text{ONCE}}$
21	P1.5/$\overline{\text{GCS5}}$	42	V_{CC}	63	V_{SS}	84	V_{SS}

NOTE:
Pin names in parentheses apply to the 80C188EB/80L188EB.

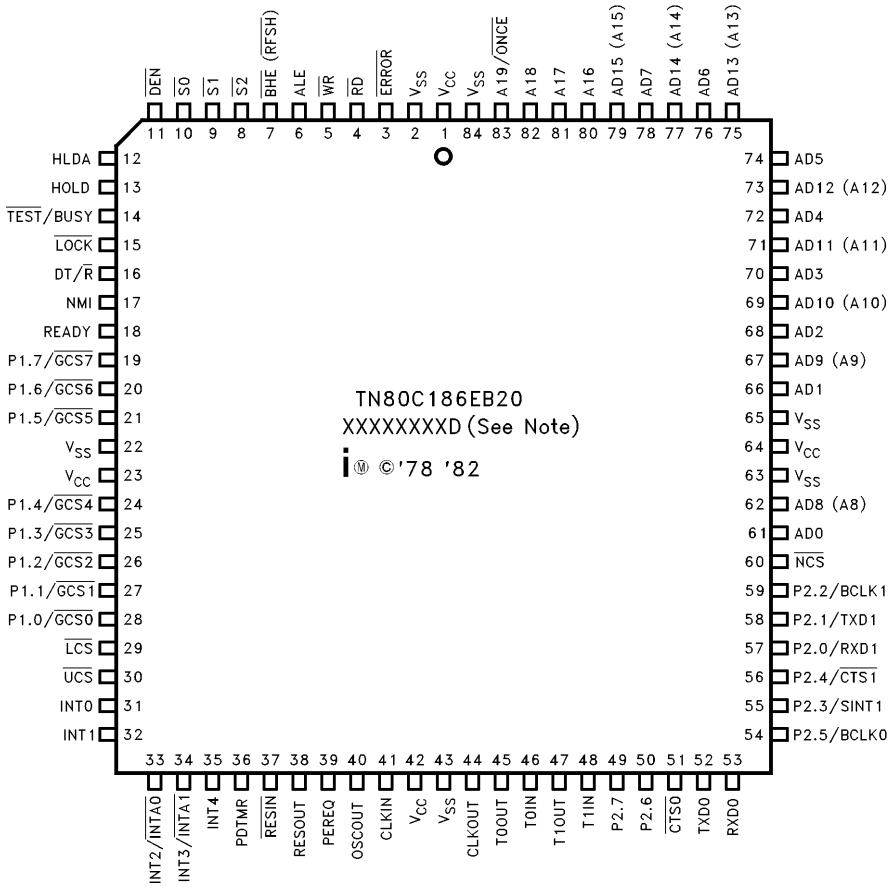

NOTE:
This is the FPO number location (indicated by X's).
Pin names in parentheses apply to the 80C188EB/80L188EB.

Figure 4. 84-Pin Plastic Leaded Chip Carrier Pinout Diagram

Table 6. QFP Pin Name with Package Location

Address/Data Bus	
Name	**Location**
AD0	10
AD1	15
AD2	17
AD3	19
AD4	21
AD5	23
AD6	25
AD7	27
AD8 (A8)	11
AD9 (A9)	16
AD10 (A10)	18
AD11 (A11)	20
AD12 (A12)	22
AD13 (A13)	24
AD14 (A14)	26
AD15 (A15)	28
A16	29
A17	30
A18	31
A19/$\overline{\text{ONCE}}$	32

Bus Control	
Name	**Location**
ALE	38
$\overline{\text{BHE}}$ ($\overline{\text{RFSH}}$)	39
$\overline{\text{S0}}$	42
$\overline{\text{S1}}$	41
$\overline{\text{S2}}$	40
$\overline{\text{RD}}$	36
$\overline{\text{WR}}$	37
READY	49
$\overline{\text{DEN}}$	43
$\overline{\text{LOCK}}$	47
HOLD	45
HLDA	44

Power	
Name	**Location**
V_{SS}	12, 14, 33
	35, 53, 73
V_{CC}	13, 34
	54, 72

Processor Control	
Name	**Location**
$\overline{\text{RESIN}}$	68
RESOUT	69
CLKIN	71
OSCOUT	70
CLKOUT	74
$\overline{\text{TEST}}$	46
PDTMR	67
NMI	48
INT0	62
INT1	63
INT2/$\overline{\text{INTA0}}$	64
INT3/$\overline{\text{INTA1}}$	65
INT4	66


I/O	
Name	**Location**
$\overline{\text{UCS}}$	61
$\overline{\text{LCS}}$	60
P1.0/$\overline{\text{GCS0}}$	59
P1.1/$\overline{\text{GCS1}}$	58
P1.2/$\overline{\text{GCS2}}$	57
P1.3/$\overline{\text{GCS3}}$	56
P1.4/$\overline{\text{GCS4}}$	55
P1.5/$\overline{\text{GCS5}}$	52
P1.6/$\overline{\text{GCS6}}$	51
P1.7/$\overline{\text{GCS7}}$	50
T0OUT	75
T0IN	76
T1OUT	77
T1IN	78
RXD0	3
TXD0	2
P2.5/BCLK0	4
$\overline{\text{CTS0}}$	1
P2.0/RXD1	7
P2.1/TXD1	8
P2.2/BCLK1	9
P2.3/SINT1	5
P2.4/$\overline{\text{CTS1}}$	6
P2.6	80
P2.7	79

NOTE:
Pin names in parentheses apply to the 80C188EB/80L188EB.

Table 7. QFP Package Location with Pin Names

Location	Name	Location	Name	Location	Name	Location	Name
1	$\overline{CTS0}$	21	AD4	41	$\overline{S1}$	61	$\overline{UCS}$
2	TXD0	22	AD12 (A12)	42	$\overline{S0}$	62	INT0
3	RXD0	23	AD5	43	$\overline{DEN}$	63	INT1
4	P2.5/BCLK0	24	AD13 (A13)	44	HLDA	64	INT2/$\overline{INTA0}$
5	P2.3/SINT1	25	AD6	45	HOLD	65	INT3/$\overline{INTA1}$
6	P2.4/$\overline{CTS1}$	26	AD14 (A14)	46	$\overline{TEST}$	66	INT4
7	P2.0/RXD1	27	AD7	47	$\overline{LOCK}$	67	PDTMR
8	P2.1/TXD1	28	AD15 (A15)	48	NMI	68	$\overline{RESIN}$
9	P2.2/BCLK1	29	A16	49	READY	69	RESOUT
10	AD0	30	A17	50	P1.7/$\overline{GCS7}$	70	OSCOUT
11	AD8 (A8)	31	A18	51	P1.6/$\overline{GCS6}$	71	CLKIN
12	V_{SS}	32	A19/$\overline{ONCE}$	52	P1.5/$\overline{GCS5}$	72	V_{CC}
13	V_{CC}	33	V_{SS}	53	V_{SS}	73	V_{SS}
14	V_{SS}	34	V_{CC}	54	V_{CC}	74	CLKOUT
15	AD1	35	V_{SS}	55	P1.4/$\overline{GCS4}$	75	T0OUT
16	AD9 (A9)	36	$\overline{RD}$	56	P1.3/$\overline{GCS3}$	76	T0IN
17	AD2	37	$\overline{WR}$	57	P1.2/$\overline{GCS2}$	77	T1OUT
18	AD10 (A10)	38	ALE	58	P1.1/$\overline{GCS1}$	78	T1IN
19	AD3	39	$\overline{BHE}$ ($\overline{RFSH}$)	59	P1.0/$\overline{GCS0}$	79	P2.7
20	AD11 (A11)	40	$\overline{S2}$	60	$\overline{LCS}$	80	P2.6

NOTE:
Pin names in parentheses apply to the 80C188EB/80L188EB.

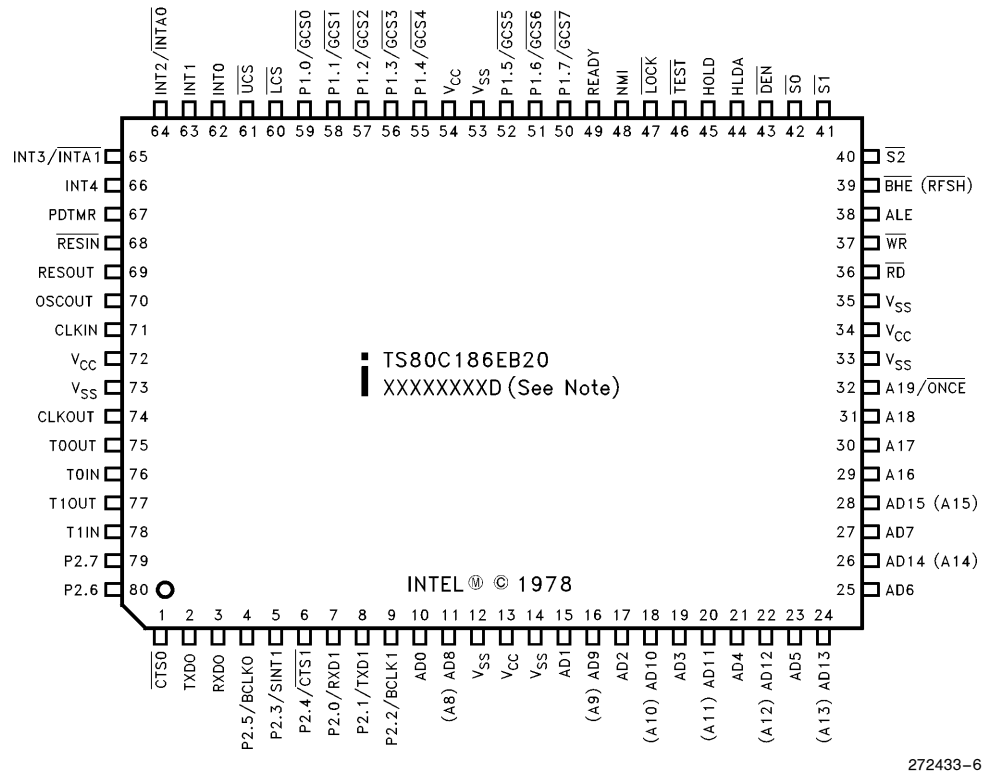

NOTE:
This is the FPO number location (indicated by X's).
Pin names in parentheses apply to the 80C188EB/80L188EB.

Figure 5. Quad Flat Pack Pinout Diagram

Table 8. SQFP Pin Functions with Location

AD Bus	
AD0	47
AD1	52
AD2	54
AD3	56
AD4	58
AD5	60
AD6	62
AD7	64
AD8 (A8)	48
AD9 (A9)	53
AD10 (A10)	55
AD11 (A11)	57
AD12 (A12)	59
AD13 (A13)	61
AD14 (A14)	63
AD15 (A15)	65
A16	66
A17	67
A18	68
A19/ONCE	69

Bus Control	
ALE	75
BHE# (RFSH#)	76
S0#	79
S1#	78
S2#	77
RD#	73
WR#	74
READY	6
DEN#	80
LOCK#	4
HOLD	2
HLDA	1

Processor Control	
RESIN#	25
RESOUT	26
CLKIN	28
OSCOUT	27
CLKOUT	31
TEST#/BUSY	3
NMI	5
INT0	19
INT1	20
INT2/INTA0#	21
INT3/INTA1#	22
INT4	23
PDTMR	24

Power and Ground	
V_{CC}	11
V_{CC}	29
V_{CC}	50
V_{CC}	71
V_{SS}	10
V_{SS}	30
V_{SS}	49
V_{SS}	51
V_{SS}	70
V_{SS}	72

I/O	
UCS#	18
LCS#	17
P1.0/GCS0#	16
P1.1/GCS1#	15
P1.2/GCS2#	14
P1.3/GCS3#	13
P1.4/GCS4#	12
P1.5/GCS5#	9
P1.6/GCS6#	8
P1.7/GCS7#	7
P2.0/RXD1	44
P2.1/TXD1	45
P2.2/BCLK1	46
P2.3/SINT1	42
P2.4/CTS1#	43
P2.5/BCLK0	41
P2.6	37
P2.7	36
CTS0#	38
TXD0	39
RXD0	40
T0IN	33
T1IN	35
T0OUT	32
T1OUT	34

Table 9. SQFP Pin Locations with Pin Names


1	HLDA
2	HOLD
3	TEST#
4	LOCK#
5	NMI
6	READY
7	P1.7/GCS7#
8	P1.6/GCS6#
9	P1.5/GCS5#
10	V_{SS}
11	V_{CC}
12	P1.4/GCS4#
13	P1.3/GCS3#
14	P1.2/GCS2#
15	P1.1/GCS1#
16	P1.0/GCS0#
17	LCS#
18	UCS#
19	INT0
20	INT1

21	INT1/INTA0#
22	INT3/INTA1#
23	INT4
24	PDTMR
25	RESIN#
26	RESOUT
27	OSCOUT
28	CLKIN
29	V_{CC}
30	V_{SS}
31	CLKOUT
32	T0OUT
33	T0IN
34	T1OUT
35	T1IN
36	P2.7
37	P2.6
38	CTS0#
39	TXD0
40	RXD0

41	P2.5/BCLK0
42	P2.3/SINT1
43	P2.4/CTS1#
44	P2.0/RXD1
45	P2.1/TXD1
46	P2.2/BCLK1
47	AD0
48	AD8 (A8)
49	V_{SS}
50	V_{CC}
51	V_{SS}
52	AD1
53	AD9 (A9)
54	AD2
55	AD10 (A10)
56	AD3
57	AD11 (A11)
58	AD4
59	AD12 (A12)
60	AD5

61	AD13 (A13)
62	AD6
63	AD14 (A14)
64	AD7
65	AD15 (A15)
66	A16
67	A17
68	A18
69	A19/ONCE
70	V_{SS}
71	V_{CC}
72	V_{SS}
73	RD#
74	WR#
75	ALE
76	BHE# (RFSH#)
77	S2#
78	S1#
79	S0#
80	DEN#

NOTE:
Pin names in parentheses apply to the 80C188EB/80L188EB.

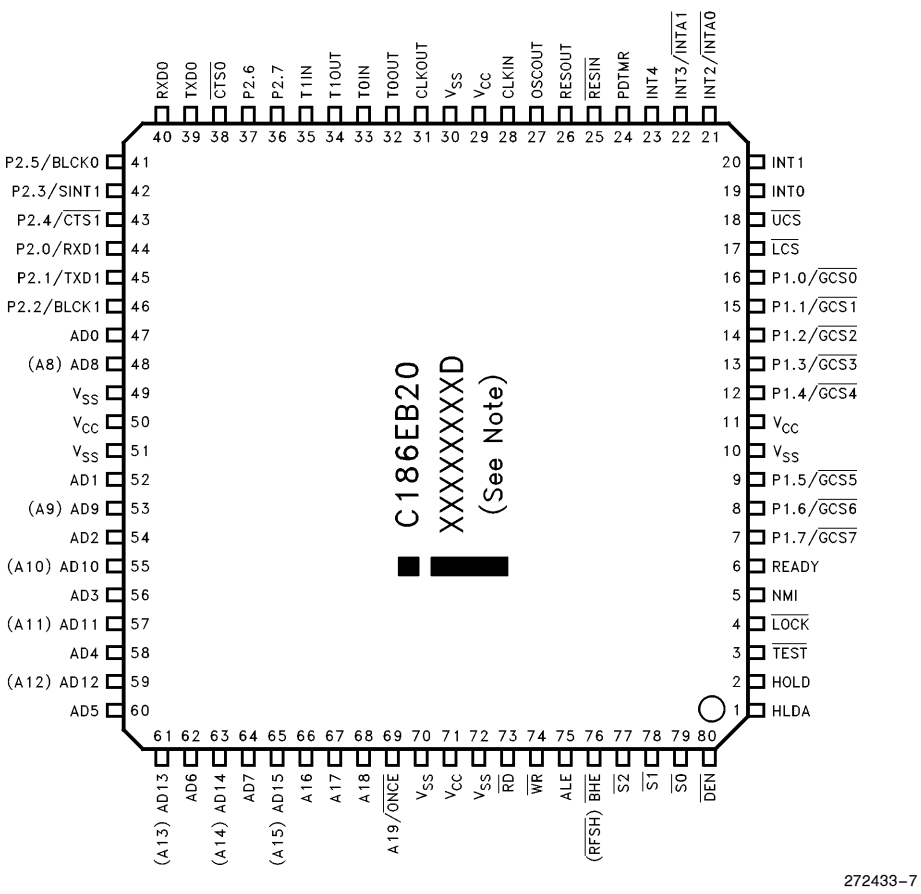

NOTE:
XXXXXXXXC indicates Intel FPO number.
Pin names in parentheses apply to the 80C188EB/80L188EB.

Figure 6. SQFP Package

PACKAGE THERMAL SPECIFICATIONS

The 80C186EB/80L186EB is specified for operation when T_C (the case temperature) is within the range of −40°C to +100°C (PLCC package) or −40°C to +114°C (QFP package). T_C may be measured in any environment to determine whether the processor is within the specified operating range. The case temperature must be measured at the center of the top surface.

T_A (the ambient temperature) can be calculated from θ_{CA} (thermal resistance from the case to ambient) with the following equation:

$$T_A = T_C - P^*\theta_{CA}$$

Typical values for θ_{CA} at various airflows are given in Table 10. P (the maximum power consumption, specified in watts) is calculated by using the maximum ICC as tabulated in the DC specifications and V_{CC} of 5.5V.

Table 10. Thermal Resistance (θ_{CA}) at Various Airflows (in °C/Watt)

	Airflow Linear ft/min (m/sec)					
	0 (0)	**200 (1.01)**	**400 (2.03)**	**600 (3.04)**	**800 (4.06)**	**1000 (5.07)**
θ_{CA} (PLCC)	30	24	21	19	17	16.5
θ_{CA} (QFP)	58	47	43	40	38	36
θ_{CA} (SQFP)	70	TBD	TBD	TBD	TBD	TBD

ELECTRICAL SPECIFICATIONS

NOTICE: This data sheet contains preliminary information on new products in production. It is valid for the devices indicated in the revision history. The specifications are subject to change without notice.

Absolute Maximum Ratings

Storage Temperature . . . . . −65°C to +150°C

Case Temp under Bias . . . . . −65°C to +120°C

Supply Voltage
with Respect to V_{SS} . . . . . −0.5V to + 6.5V

Voltage on other Pins
with Respect to V_{SS} . . . . . −0.5V to V_{CC} + 0.5V

**WARNING: Stressing the device beyond the "Absolute Maximum Ratings" may cause permanent damage. These are stress ratings only. Operation beyond the "Operating Conditions" is not recommended and extended exposure beyond the "Operating Conditions" may affect device reliability.*

Recommended Connections

Power and ground connections must be made to multiple V_{CC} and V_{SS} pins. Every 80C186EB-based circuit board should include separate power (V_{CC}) and ground (V_{SS}) planes. Every V_{CC} pin must be connected to the power plane, and every V_{SS} pin must be connected to the ground plane. Pins identified as "NC" must not be connected in the system. Liberal decoupling capacitance should be placed near the processor. The processor can cause transient power surges when its output buffers transition, particularly when connected to large capacitive loads.

Low inductance capacitors and interconnects are recommended for best high frequency electrical performance. Inductance is reduced by placing the decoupling capacitors as close as possible to the processor V_{CC} and V_{SS} package pins.

Always connect any unused input to an appropriate signal level. In particular, unused interrupt inputs (INT0:4) should be connected to V_{CC} through a pull-up resistor (in the range of 50 KΩ). **Leave any unused output pin or any NC pin unconnected.**

DC SPECIFICATIONS (80C186EB/80C188EB)

Symbol	Parameter	Min	Max	Units	Notes
V_{CC}	Supply Voltage	4.5	5.5	V	
V_{IL}	Input Low Voltage	−0.5	0.3 V_{CC}	V	
V_{IH}	Input High Voltage	0.7 V_{CC}	V_{CC} + 0.5	V	
V_{OL}	Output Low Voltage		0.45	V	I_{OL} = 3 mA (Min)
V_{OH}	Output High Voltage	V_{CC} − 0.5		V	I_{OH} = −2 mA (MIn)
V_{HYR}	Input Hysterisis on $\overline{RESIN}$	0.50		V	
I_{LI1}	Input Leakage Current for Pins: AD15:0 (AD7:0), READY, HOLD, $\overline{RESIN}$, CLKIN, $\overline{TEST}$, NMI, INT4:0, T0IN, T1IN, RXD0, $\overline{BCLK0}$, $\overline{CTS0}$, RXD1, $\overline{BCLK1}$, $\overline{CTS1}$, P2.6, P2.7		±15	μA	0V ≤ V_{IN} ≤ V_{CC}
I_{LI2}	Input Leakage Current for Pins: $\overline{ERROR}$, PEREQ	±0.275	±7	mA	0V ≤ V_{IN} < V_{CC}
I_{LI3}	Input Leakage Current for Pins: A19/$\overline{ONCE}$, A18:16, $\overline{LOCK}$	−0.275	−5.0	mA	V_{IN} = 0.7 V_{CC} (Note 1)
I_{LO}	Output Leakage Current		±15	μA	0.45 ≤ V_{OUT} ≤ V_{CC} (Note 2)
I_{CC}	Supply Current Cold (RESET) 80C186EB25		115	mA	(Notes 3, 7)
	80C186EB20		108	mA	(Note 3)
	80C186EB13		73	mA	(Note 3)
I_{ID}	Supply Current Idle 80C186EB25		91	mA	(Notes 4, 7)
	80C186EB20		76	mA	(Note 4)
	80C186EB13		48	mA	(Note 4)
I_{PD}	Supply Current Powerdown 80C186EB25		100	μA	(Notes 5, 7)
	80C186EB20		100	μA	(Note 5)
	80C186EB13		100	μA	(Note 5)
C_{IN}	Input Pin Capacitance	0	15	pF	T_F = 1 MHz
C_{OUT}	Output Pin Capacitance	0	15	pF	T_F = 1 MHz (Note 6)

NOTES:
1. These pins have an internal pull-up device that is active while $\overline{RESIN}$ is low and ONCE Mode is not active. Sourcing more current than specified (on any of these pins) may invoke a factory test mode.
2. Tested by outputs being floated by invoking ONCE Mode or by asserting HOLD.
3. Measured with the device in RESET and at worst case frequency, V_{CC}, and temperature with **ALL** outputs loaded as specified in AC Test Conditions, and all floating outputs driven to V_{CC} or GND.
4. Measured with the device in HALT (IDLE Mode active) and at worst case frequency, V_{CC}, and temperature with **ALL** outputs loaded as specified in AC Test Conditions, and all floating outputs driven to V_{CC} or GND.
5. Measured with the device in HALT (Powerdown Mode active) and at worst case frequency, V_{CC}, and temperature with **ALL** outputs loaded as specified in AC Test Conditions, and all floating outputs driven to V_{CC} or GND.
6. Output Capacitance is the capacitive load of a floating output pin.
7. Operating temperature for 25 MHz is 0°C to 70°C, V_{CC} = 5.0 ±10%.

DC SPECIFICATIONS (80L186EB16) (operating temperature, 0°C to 70°C)

Symbol	Parameter	Min	Max	Units	Notes
V_{CC}	Supply Voltage	3.0	5.5	V	
V_{IL}	Input Low Voltage	−0.5	0.3 V_{CC}	V	
V_{IH}	Input High Voltage	0.7 V_{CC}	V_{CC} + 0.5	V	
V_{OL}	Output Low Voltage		0.45	V	I_{OL} = 1.6 mA (Min) (Note 1)
V_{OH}	Output High Voltage	V_{CC} − 0.5		V	I_{OH} = −1 mA (Min) (Note 1)
V_{HYR}	Input Hysterisis on $\overline{RESIN}$	0.50		V	
I_{LI1}	Input Leakage Current for pins: AD15:0 (AD7:0), READY, HOLD, $\overline{RESIN}$, CLKIN, $\overline{TEST}$, NMI, INT4:0, T0IN, T1IN, RXD0, $\overline{BCLK0}$, $\overline{CTS0}$, RXD1, $\overline{BCLK1}$, $\overline{CTS1}$, SINT1, P2.6, P2.7		±15	μA	0V ≤ V_{IN} ≤ V_{CC}
I_{LI2}	Input Leakage Current for Pins: A19/$\overline{ONCE}$, A18:16, $\overline{LOCK}$	−0.275	−2	mA	V_{IN} = 0.7 V_{CC} (Note 2)
I_{LO}	Output Leakage Current		±15	μA	0.45 ≤ V_{OUT} ≤ V_{CC} (Note 3)
I_{CC3}	Supply Current (RESET, 3.3V) 80L186EB16		54	mA	(Note 4)
I_{ID3}	Supply Current Idle (3.3V) 80L186EB16		38	mA	(Note 5)
I_{PD3}	Supply Current Powerdown (3.3V) 80L186EB16		40	μA	(Note 6)
C_{IN}	Input Pin Capacitance	0	15	pF	T_F = 1 MHz
C_{OUT}	Output Pin Capacitance	0	15	pF	T_F = 1 MHz (Note 7)

NOTES:
1. I_{OL} and I_{OH} measured at V_{CC} = 3.0V.
2. These pins have an internal pull-up device that is active while $\overline{RESIN}$ is low and ONCE Mode is not active. Sourcing more current than specified (on any of these pins) may invoke a factory test mode.
3. Tested by outputs being floated by invoking ONCE Mode or by asserting HOLD.
4. Measured with the device in RESET and at worst case frequency, V_{CC}, and temperature with **ALL** outputs loaded as specified in AC Test Conditions, and all floating outputs driven to V_{CC} or GND.
5. Measured with the device in HALT (IDLE Mode active) and at worst case frequency, V_{CC}, and temperature with **ALL** outputs loaded as specified in AC Test Conditions, and all floating outputs driven to V_{CC} or GND.
6. Measured with the device in HALT (Powerdown Mode active) and at worst case frequency, V_{CC}, and temperature with **ALL** outputs loaded as specified in AC Test Conditions, and all floating outputs driven to V_{CC} or GND.
7. Output Capacitance is the capacitive load of a floating output pin.

DC SPECIFICATIONS (80L186EB13/80L188EB13

Symbol	Parameter	Min	Max	Units	Notes
V_{CC}	Supply Voltage	2.7	5.5	V	
V_{IL}	Input Low Voltage	−0.5	0.3 V_{CC}	V	
V_{IH}	Input High Voltage	0.7 V_{CC}	V_{CC} + 0.5	V	
V_{OL}	Output Low Voltage		0.45	V	I_{OL} = 1.6 mA (Min) (Note 1)
V_{OH}	Output High Voltage	V_{CC} − 0.5		V	I_{OH} = −1 mA (Min) (Note 1)
V_{HYR}	Input Hysterisis on $\overline{RESIN}$	0.50		V	
I_{LI1}	Input Leakage Current for pins: AD15:0 (AD7:0), READY, HOLD, $\overline{RESIN}$, CLKIN, $\overline{TEST}$, NMI, INT4:0, T0IN, T1IN, RXD0, $\overline{BCLK0}$, $\overline{CTS0}$, RXD1, $\overline{BCLK1}$, $\overline{CTS1}$, SINT1, P2.6, P2.7		±15	μA	0V ≤ V_{IN} ≤ V_{CC}
I_{LI2}	Input Leakage Current for Pins: A19/$\overline{ONCE}$, A18:16, $\overline{LOCK}$	−0.275	−2	mA	V_{IN} = 0.7 V_{CC} (Note 2)
I_{LO}	Output Leakage Current		±15	μA	0.45 ≤ V_{OUT} ≤ V_{CC} (Note 3)
I_{CC5}	Supply Current (RESET, 5.5V) 80L186EB13 80L186EB8		 73 45	 mA mA	 (Note 4) (Note 4)
I_{CC3}	Supply Current (RESET, 2.7V) 80L186EB13 80L186EB8		 36 22	 mA mA	 (Note 4) (Note 4)
I_{ID5}	Supply Current Idle (5.5V) 80L186EB13 80L186EB8		 48 31	 mA mA	 (Note 5) (Note 5)
I_{ID3}	Supply Current Idle (2.7V) 80L186EB13 80L186EB8		 24 15	 mA mA	 (Note 5) (Note 5)
I_{PD5}	Supply Current Powerdown (5.5V) 80L186EB13 80L186EB8		 100 100	 μA μA	 (Note 6) (Note 6)
I_{PD3}	Supply Current Powerdown (2.7V) 80L186EB13 80L186EB8		 30 30	 μA μA	 (Note 6) (Note 6)
C_{IN}	Input Pin Capacitance	0	15	pF	T_F = 1 MHz
C_{OUT}	Output Pin Capacitance	0	15	pF	T_F = 1 MHz (Note 7)

NOTES:
1. I_{OL} and I_{OH} measured at V_{CC} = 2.7V.
2. These pins have an internal pull-up device that is active while $\overline{RESIN}$ is low and ONCE Mode is not active. Sourcing more current than specified (on any of these pins) may invoke a factory test mode.
3. Tested by outputs being floated by invoking ONCE Mode or by asserting HOLD.
4. Measured with the device in RESET and at worst case frequency, V_{CC}, and temperature with **ALL** outputs loaded as specified in AC Test Conditions, and all floating outputs driven to V_{CC} or GND.
5. Measured with the device in HALT (IDLE Mode active) and at worst case frequency, V_{CC}, and temperature with **ALL** outputs loaded as specified in AC Test Conditions, and all floating outputs driven to V_{CC} or GND.
6. Measured with the device in HALT (Powerdown Mode active) and at worst case frequency, V_{CC}, and temperature with **ALL** outputs loaded as specified in AC Test Conditions, and all floating outputs driven to V_{CC} or GND.
7. Output Capacitance is the capacitive load of a floating output pin.

I_{CC} VERSUS FREQUENCY AND VOLTAGE

The current (I_{CC}) consumption of the processor is essentially composed of two components; I_{PD} and I_{CCS}.

I_{PD} is the **quiescent** current that represents internal device leakage, and is measured with all inputs or floating outputs at GND or V_{CC} (no clock applied to the device). I_{PD} is equal to the Powerdown current and is typically less than 50 μA.

I_{CCS} is the **switching** current used to charge and discharge parasitic device capacitance when changing logic levels. Since I_{CCS} is typically much greater than I_{PD}, I_{PD} can often be ignored when calculating I_{CC}.

I_{CCS} is related to the voltage and frequency at which the device is operating. It is given by the formula:

$$\text{Power} = V \times I = V^2 \times C_{DEV} \times f$$

$$\therefore I = I_{CC} = I_{CCS} = V \times C_{DEV} \times f$$

Where: V = Device operating voltage (V_{CC})

C_{DEV} = Device capacitance

f = Device operating frequency

$I_{CCS} = I_{CC}$ = Device current

Measuring C_{DEV} on a device like the 80C186EB would be difficult. Instead, C_{DEV} is calculated using the above formula by measuring I_{CC} at a known V_{CC} and frequency (see Table 11). Using this C_{DEV} value, I_{CC} can be calculated at any voltage and frequency within the specified operating range.

EXAMPLE: Calculate the typical I_{CC} when operating at 10 MHz, 4.8V.

$$I_{CC} = I_{CCS} = 4.8 \times 0.583 \times 10 \approx 28 \text{ mA}$$

PDTMR PIN DELAY CALCULATION

The PDTMR pin provides a delay between the assertion of NMI and the enabling of the internal clocks when exiting Powerdown. A delay is required only when using the on-chip oscillator to allow the crystal or resonator circuit time to stabilize.

NOTE:
The PDTMR pin function does not apply when $\overline{\text{RESIN}}$ is asserted (i.e., a device reset during Powerdown is similar to a cold reset and $\overline{\text{RESIN}}$ must remain active until after the oscillator has stabilized).

To calculate the value of capacitor required to provide a desired delay, use the equation:

$$440 \times t = C_{PD} \quad (5V, 25°C)$$

Where: t = desired delay in **seconds**

C_{PD} = capacitive load on PDTMR in **microfarads**

EXAMPLE: To get a delay of 300 μs, a capacitor value of $C_{PD} = 440 \times (300 \times 10^{-6}) = 0.132$ μF is required. Round up to standard (available) capacitive values.

NOTE:
The above equation applies to delay times greater than 10 μs and will compute the **TYPICAL** capacitance needed to achieve the desired delay. A delay variance of +50% or −25% can occur due to temperature, voltage, and device process extremes. In general, higher V_{CC} and/or lower temperature will decrease delay time, while lower V_{CC} and/or higher temperature will increase delay time.

Table 11. Device Capacitance (C_{DEV}) Values

Parameter	Typ	Max	Units	Notes
C_{DEV} (Device in Reset)	0.583	1.02	mA/V*MHz	1, 2
C_{DEV} (Device in Idle)	0.408	0.682	mA/V*MHz	1, 2

1. Max C_{DEV} is calculated at −40°C, all floating outputs driven to V_{CC} or GND, and all outputs loaded to 50 pF (including CLKOUT and OSCOUT).
2. Typical C_{DEV} is calculated at 25°C with all outputs loaded to 50 pF except CLKOUT and OSCOUT, which are not loaded.

AC SPECIFICATIONS

AC Characteristics—80C186EB25

Symbol	Parameter	25 MHz		Units	Notes
		Min	Max		
INPUT CLOCK					
T_F	CLKIN Frequency	0	50	MHz	1
T_C	CLKIN Period	20	∞	ns	1
T_{CH}	CLKIN High Time	8	∞	ns	1, 2
T_{CL}	CLKIN Low Time	8	∞	ns	1, 2
T_{CR}	CLKIN Rise Time	1	7	ns	1, 3
T_{CF}	CLKIN Fall Time	1	7	ns	1, 3
OUTPUT CLOCK					
T_{CD}	CLKIN to CLKOUT Delay	0	16	ns	1, 4
T	CLKOUT Period		$2*T_C$	ns	1
T_{PH}	CLKOUT High Time	(T/2) − 5	(T/2) + 5	ns	1
T_{PL}	CLKOUT Low Time	(T/2) − 5	(T/2) + 5	ns	1
T_{PR}	CLKOUT Rise Time	1	6	ns	1, 5
T_{PF}	CLKOUT Fall Time	1	6	ns	1, 5
OUTPUT DELAYS					
T_{CHOV1}	ALE, $\overline{S2:0}$, $\overline{DEN}$, DT/$\overline{R}$, $\overline{BHE}$ ($\overline{RFSH}$), $\overline{LOCK}$, A19:16	3	17	ns	1, 4, 6, 7
T_{CHOV2}	$\overline{GCS0:7}$, $\overline{LCS}$, $\overline{UCS}$, $\overline{NCS}$, $\overline{RD}$, $\overline{WR}$	3	20	ns	1, 4, 6, 8
T_{CLOV1}	$\overline{BHE}$ ($\overline{RFSH}$), $\overline{DEN}$, $\overline{LOCK}$, RESOUT, HLDA, T0OUT, T1OUT, A19:16	3	17	ns	1, 4, 6
T_{CLOV2}	$\overline{RD}$, $\overline{WR}$, $\overline{GCS7:0}$, $\overline{LCS}$, $\overline{UCS}$, AD15:0 (AD7:0, A15:8), $\overline{NCS}$, $\overline{INTA1:0}$, $\overline{S2:0}$	3	20	ns	1, 4, 6
T_{CHOF}	$\overline{RD}$, $\overline{WR}$, $\overline{BHE}$ ($\overline{RFSH}$), DT/$\overline{R}$, $\overline{LOCK}$, $\overline{S2:0}$, A19:16	0	20	ns	1
T_{CLOF}	$\overline{DEN}$, AD15:0 (AD7:0, A15:8)	0	20	ns	1

AC SPECIFICATIONS

AC Characteristics—80C186EB25 (Continued)

Symbol	Parameter	25 MHz		Units	Notes
		Min	Max		
SYNCHRONOUS INPUTS					
T_{CHIS}	$\overline{TEST}$, NMI, INT4:0, BCLK1:0, T1:0IN, READY, $\overline{CTS1:0}$, P2.6, P2.7	10		ns	1, 9
T_{CHIH}	$\overline{TEST}$, NMI, INT4:0, BCLK1:0, T1:0IN, READY, $\overline{CTS1:0}$	3		ns	1, 9
T_{CLIS}	AD15:0 (AD7:0), READY	10		ns	1, 10
T_{CLIH}	READY, AD15:0 (AD7:0)	3		ns	1, 10
T_{CLIS}	HOLD, PEREQ, $\overline{ERROR}$	10		ns	1, 9
T_{CLIH}	HOLD, PEREQ, $\overline{ERROR}$	3		ns	1, 9

NOTES:
1. See **AC Timing Waveforms**, for waveforms and definition.
2. Measure at V_{IH} for high time, V_{IL} for low time.
3. Only required to guarantee I_{CC}. Maximum limits are bounded by T_C, T_{CH} and T_{CL}.
4. Specified for a 50 pF load, see Figure 13 for capacitive derating information.
5. Specified for a 50 pF load, see Figure 14 for rise and fall times outside 50 pF.
6. See Figure 14 for rise and fall times.
7. T_{CHOV1} applies to $\overline{BHE}$ ($\overline{RFSH}$), $\overline{LOCK}$ and A19:16 only after a HOLD release.
8. T_{CHOV2} applies to $\overline{RD}$ and $\overline{WR}$ only after a HOLD release.
9. Setup and Hold are required to guarantee recognition.
10. Setup and Hold are required for proper operation.

AC SPECIFICATIONS

AC Characteristics—80C186EB20/80C186EB13

Symbol	Parameter	20 MHz		13 MHz		Units	Notes
		Min	Max	Min	Max		
INPUT CLOCK							
T_F	CLKIN Frequency	0	40	0	26	MHz	1
T_C	CLKIN Period	25	∞	38.5	∞	ns	1
T_{CH}	CLKIN High Time	10	∞	12	∞	ns	1, 2
T_{CL}	CLKIN Low Time	10	∞	12	∞	ns	1, 2
T_{CR}	CLKIN Rise Time	1	8	1	8	ns	1, 3
T_{CF}	CLKIN Fall Time	1	8	1	8	ns	1, 3
OUTPUT CLOCK							
T_{CD}	CLKIN to CLKOUT Delay	0	17	0	23	ns	1, 4
T	CLKOUT Period		$2*T_C$		$2*T_C$	ns	1
T_{PH}	CLKOUT High Time	(T/2) − 5	(T/2) + 5	(T/2) − 5	(T/2) + 5	ns	1
T_{PL}	CLKOUT Low Time	(T/2) − 5	(T/2) + 5	(T/2) − 5	(T/2) + 5	ns	1
T_{PR}	CLKOUT Rise Time	1	6	1	6	ns	1, 5
T_{PF}	CLKOUT Fall Time	1	6	1	6	ns	1, 5
OUTPUT DELAYS							
T_{CHOV1}	ALE, S2:0, DEN, DT/R, BHE (RFSH), LOCK, A19:16	3	22	3	25	ns	1, 4, 6, 7
T_{CHOV2}	GCS0:7, LCS, UCS, NCS, RD, WR	3	27	3	30	ns	1, 4, 6, 8
T_{CLOV1}	BHE (RFSH), DEN, LOCK, RESOUT, HLDA, T0OUT, T1OUT, A19:16	3	22	3	25	ns	1, 4, 6
T_{CLOV2}	RD, WR, GCS7:0, LCS, UCS, AD15:0 (AD7:0, A15:8), NCS, INTA1:0, S2:0	3	27	3	30	ns	1, 4, 6
T_{CHOF}	RD, WR, BHE (RFSH), DT/R, LOCK, S2:0, A19:16	0	25	0	25	ns	1
T_{CLOF}	DEN, AD15:0 (AD7:0, A15:8)	0	25	0	25	ns	1

AC SPECIFICATIONS

AC Characteristics—80C186EB20/80C186EB13 (Continued)

Symbol	Parameter	20 MHz		13 MHz		Units	Notes
		Min	Max	Min	Max		
SYNCHRONOUS INPUTS							
T_{CHIS}	$\overline{TEST}$, NMI, INT4:0, BCLK1:0, T1:0IN, READY, $\overline{CTS1:0}$, P2.6, P2.7	10		10		ns	1, 9
T_{CHIH}	$\overline{TEST}$, NMI, INT4:0, BCLK1:0, T1:0IN, READY, $\overline{CTS1:0}$	3		3		ns	1, 9
T_{CLIS}	AD15:0 (AD7:0), READY	10		10		ns	1, 10
T_{CLIH}	READY, AD15:0 (AD7:0)	3		3		ns	1, 10
T_{CLIS}	HOLD, PEREQ, $\overline{ERROR}$	10		10		ns	1, 9
T_{CLIH}	HOLD, PEREQ, $\overline{ERROR}$	3		3		ns	1, 9

NOTES:
1. See **AC Timing Waveforms**, for waveforms and definition.
2. Measure at V_{IH} for high time, V_{IL} for low time.
3. Only required to guarantee I_{CC}. Maximum limits are bounded by T_C, T_{CH} and T_{CL}.
4. Specified for a 50 pF load, see Figure 13 for capacitive derating information.
5. Specified for a 50 pF load, see Figure 14 for rise and fall times outside 50 pF.
6. See Figure 14 for rise and fall times.
7. T_{CHOV1} applies to $\overline{BHE}$ ($\overline{RFSH}$), $\overline{LOCK}$ and A19:16 only after a HOLD release.
8. T_{CHOV2} applies to $\overline{RD}$ and $\overline{WR}$ only after a HOLD release.
9. Setup and Hold are required to guarantee recognition.
10. Setup and Hold are required for proper operation.

AC SPECIFICATIONS

AC Characteristics—80L186EB16

Symbol	Parameter	16 MHz		Units	Notes
		Min	Max		
INPUT CLOCK					
T_F	CLKIN Frequency	0	32	MHz	1
T_C	CLKIN Period	31.25	∞	ns	1
T_{CH}	CLKIN High Time	13	∞	ns	1, 2
T_{CL}	CLKIN Low Time	13	∞	ns	1, 2
T_{CR}	CLKIN Rise Time	1	8	ns	1, 3
T_{CF}	CLKIN Fall Time	1	8	ns	1, 3
OUTPUT CLOCK					
T_{CD}	CLKIN to CLKOUT Delay	0	30	ns	1, 4
T	CLKOUT Period		$2*T_C$	ns	1
T_{PH}	CLKOUT High Time	(T/2) − 5	(T/2) + 5	ns	1
T_{PL}	CLKOUT Low Time	(T/2) − 5	(T/2) + 5	ns	1
T_{PR}	CLKOUT Rise Time	1	9	ns	1, 5
T_{PF}	CLKOUT Fall Time	1	9	ns	1, 5
OUTPUT DELAYS					
T_{CHOV1}	DT/$\overline{R}$, $\overline{LOCK}$, A19:16, $R_{\overline{FSH}}$	3	22	ns	1, 4, 6, 7
T_{CHOV2}	$\overline{GCS0:7}$, $\overline{LCS}$, $\overline{UCS}$, $\overline{NCS}$, $\overline{RD}$, $\overline{WR}$	3	27	ns	1, 4, 6, 8
T_{CHOV3}	$\overline{BHE}$, $\overline{DEN}$	3	25	ns	1, 4
T_{CHOV4}	ALE	3	30	ns	1, 4
T_{CHOV5}	$\overline{S2:0}$	3	33	ns	1, 4
T_{CLOV1}	$\overline{LOCK}$, RESOUT, HLDA, T0OUT, T1OUT, A19:16	3	22	ns	1, 4, 6
T_{CLOV2}	$\overline{RD}$, $\overline{WR}$, $\overline{GCS7:0}$, $\overline{LCS}$, $\overline{UCS}$, $\overline{NCS}$, $\overline{INTA1:0}$, AD15:0 (AD7:0, A15:8)	3	27	ns	1, 4, 6
T_{CHOF}	$\overline{RD}$, $\overline{WR}$, $\overline{BHE}$ ($\overline{RFSH}$), DT/$\overline{R}$, $\overline{LOCK}$, $\overline{S2:0}$, A19:16	0	25	ns	1
T_{CLOF}	$\overline{DEN}$, AD15:0 (AD7:0, A15:8)	0	25	ns	1
T_{CLOV3}	$\overline{BHE}$, $\overline{DEN}$	3	25	ns	1, 4, 6
T_{CLOV5}	$\overline{S2:0}$	3	33	ns	1, 4, 6

AC SPECIFICATIONS

AC Characteristics—80L186EB16 (Continued)

Symbol	Parameter	16 MHz		Units	Notes
		Min	Max		
SYNCHRONOUS INPUTS					
T_{CHIS}	$\overline{TEST}$, NMI, INT4:0, BCLK1:0, T1:0IN, READY, $\overline{CTS1:0}$, P2.6, P2.7	15		ns	1, 9
T_{CHIH}	$\overline{TEST}$, NMI, INT4:0, T1:0IN, BCLK1:0, READY, $\overline{CTS1:0}$	3		ns	1, 9
T_{CLIS}	AD15:0 (AD7:0), READY	15		ns	1, 10
T_{CLIH}	READY, AD15:0 (AD7:0)	3		ns	1, 10
T_{CLIS}	HOLD	15		ns	1, 9
T_{CLIH}	HOLD	3		ns	1, 9

NOTES:
1. See **AC Timing Waveforms**, for waveforms and definition.
2. Measure at V_{IH} for high time, V_{IL} for low time.
3. Only required to guarantee I_{CC}. Maximum limits are bounded by T_C, T_{CH} and T_{CL}.
4. Specified for a 50 pF load, see Figure 13 for capacitive derating information.
5. Specified for a 50 pF load, see Figure 14 for rise and fall times outside 50 pF.
6. See Figure 14 for rise and fall times.
7. T_{CHOV1} applies to $\overline{BHE}$ ($\overline{RFSH}$), $\overline{LOCK}$ and A19:16 only after a HOLD release.
8. T_{CHOV2} applies to $\overline{RD}$ and $\overline{WR}$ only after a HOLD release.
9. Setup and Hold are required to guarantee recognition.
10. Setup and Hold are required for proper operation.

AC SPECIFICATIONS

AC Characteristics—80L186EB13

Symbol	Parameter	13 MHz		8 MHz		Units	Notes
		Min	Max	No Longer	Available		
INPUT CLOCK							
T_r	CLKIN Frequency	0	26			MHz	1
T_C	CLKIN Period	38.5	%			ns	1
T_{CH}	CLKIN High Time	15	%			ns	1, 2
T_{CL}	CLKIN Low Time	15	%			ns	1, 2
T_{CR}	CLKIN Rise Time	1	8			ns	1, 3
T_{CF}	CLKIN Fall Time	1	8			ns	1, 3
OUTPUT CLOCK							
T_{CD}	CLKIN to CLKOUT Delay	0	10			ns	1, 4
T	CLKOUT Period		$2*T_C$			ns	1
T_{PH}	CLKOUT High Time	(T/2) b 5	(T/2) a5			ns	1
T_{PL}	CLKOUT Low Time	(T/2) b 5	(T/2) a 5			ns	1
T_{PR}	CLKOUT Rise Time	1	10			ns	1, 5
T_{PF}	CLKOUT Fall Time	1	10			ns	1, 5
OUTPUT DELAYS							
T_{CHOV1}	ALE, $\overline{S2\text{-}0}$, $\overline{DEN}$, DT/$\overline{R}$, $\overline{BHE}$ ($\overline{RFSH}$), $\overline{LOCK}$, A19:16	3	25			ns	1, 4, 6, 7
T_{CHOV2}	$\overline{GCS0:7}$, $\overline{LCS}$, $\overline{UCS}$, $\overline{NCS}$, $\overline{RD}$, $\overline{WR}$	3	30			ns	1, 4,6, 8
T_{CLOV1}	$\overline{BHE}$ ($\overline{RFSH}$), $\overline{DEN}$, $\overline{LOCK}$, RESOUT, HLDA, T0OUT, T1OUT, A19:16	3	25			ns	1, 4, 6
T_{CLOV2}	$\overline{S2:0}$, $\overline{RD}$, $\overline{WR}$, $\overline{GCS7:0}$, $\overline{LCS}$, $\overline{UCS}$, $\overline{NCS}$, $\overline{INTA1:0}$, AD15:0 (AD7:0, A15:8)	3	30			ns	1, 4, 6
T_{CHOF}	$\overline{RD}$, $\overline{WR}$, $\overline{BHE}$ ($\overline{RFSH}$), DT/$\overline{R}$, $\overline{LOCK}$, $\overline{S2:0}$, A19:16	0	30			ns	1
T_{CLOF}	$\overline{DEN}$, AD15:0 (AD7:0, A15:8)	0	30			ns	1

AC SPECIFICATIONS

AC Characteristics—80L186EB13/80L186EB8 (Continued)

Symbol	Parameter	13 MHz		8 MHz		Units	Notes
		Min	Max	Not	Available		
SYNCHRONOUS INPUTS							
T_{CHIS}	$\overline{TEST}$, NMI, INT4:0, BCLK1:0, T1:0IN, READY $\overline{CTS1:0}$, P2.6, P2.7	20				ns	1, 9
T_{CHIH}	$\overline{TEST}$, NMI, INT4:0, T1:0IN, BCLK1:0, READY, $\overline{CTS1:0}$	3				ns	1, 9
T_{CLIS}	AD15:0 (AD7:0), READY	20				ns	1, 10
T_{CLIH}	READY, AD15:0 (AD7:0)	3				ns	1, 10
T_{CLIS}	HOLD	20				ns	1, 9
T_{CLIH}	HOLD	3				ns	1, 9

NOTES:
1. See **AC Timing Waveforms**, for waveforms and definition.
2. Measured at V_{IH} for high time, V_{IL} for low time.
3. Only required to guarantee I_{CC}. Maximum limits are bounded by T_C, T_{CH} and T_{CL}.
4. Specified for a 50 pF load, see Figure 13 for capacitive derating information.
5. Specified for a 50 pF load, see Figure 14 for rise and fall times outside 50 pF.
6. See Figure 14 for rise and fall times.
7. T_{CHOV1} applies to $\overline{BHE}$ ($\overline{RFSH}$), $\overline{LOCK}$ and A19:16 only after a HOLD release.
8. T_{CHOV2} applies to $\overline{RD}$ and $\overline{WR}$ only after a HOLD release.
9. Setup and Hold are required to guarantee recognition.
10. Setup and Hold are required for proper operation.

AC SPECIFICATIONS (Continued)

Relative Timings (80C186EB25, 20, 13/80L186EB16, 13, 8)

Symbol	Parameter	Min	Max	Units	Notes
RELATIVE TIMINGS					
T_{LHLL}	ALE Rising to ALE Falling	T − 15		ns	
T_{AVLL}	Address Valid to ALE Falling	½T − 10		ns	
T_{PLLL}	Chip Selects Valid to ALE Falling	½T − 10		ns	1
T_{LLAX}	Address Hold from ALE Falling	½T − 10		ns	
T_{LLWL}	ALE Falling to $\overline{WR}$ Falling	½T − 15		ns	1
T_{LLRL}	ALE Falling to $\overline{RD}$ Falling	½T − 15		ns	1
T_{WHLH}	$\overline{WR}$ Rising to ALE Rising	½T − 10		ns	1
T_{AFRL}	Address Float to $\overline{RD}$ Falling	0		ns	
T_{RLRH}	$\overline{RD}$ Falling to $\overline{RD}$ Rising	(2*T) − 5		ns	2
T_{WLWH}	$\overline{WR}$ Falling to $\overline{WR}$ Rising	(2*T) − 5		ns	2
T_{RHAV}	$\overline{RD}$ Rising to Address Active	T − 15		ns	
T_{WHDX}	Output Data Hold after $\overline{WR}$ Rising	T − 15		ns	
T_{WHPH}	$\overline{WR}$ Rising to Chip Select Rising	½T − 10		ns	1
T_{RHPH}	$\overline{RD}$ Rising to Chip Select Rising	½T − 10		ns	1
T_{PHPL}	$\overline{CS}$ Inactive to $\overline{CS}$ Active	½T − 10		ns	1
T_{OVRH}	$\overline{ONCE}$ Active to $\overline{RESIN}$ Rising	T		ns	3
T_{RHOX}	$\overline{ONCE}$ Hold from $\overline{RESIN}$ Rising	T		ns	3

NOTES:
1. Assumes equal loading on both pins.
2. Can be extended using wait states.
3. Not tested

AC SPECIFICATIONS (Continued)

Serial Port Mode 0 Timings (80C186EB25, 20, 13/80L186EB16, 13, 8)

Symbol	Parameter	Min	Max	Unit	Notes
T_{XLXL}	TXD Clock Period	T (n + 1)		ns	1, 2
T_{XLXH}	TXD Clock Low to Clock High (n > 1)	2T − 35	2T + 35	ns	1
T_{XLXH}	TXD Clock Low to Clock High (n = 1)	T − 35	T + 35	ns	1
T_{XHXL}	TXD Clock High to Clock Low (n > 1)	(n − 1) T − 35	(n − 1) T + 35	ns	1, 2
T_{XHXL}	TXD Clock High to Clock Low (n = 1)	T − 35	T + 35	ns	1
T_{QVXH}	RXD Output Data Setup to TXD Clock High (n > 1)	(n − 1) T − 35		ns	1, 2
T_{QVXH}	RXD Output Data Setup to TXD Clock High (n = 1)	T − 35		ns	1
T_{XHQX}	RXD Output Data Hold after TXD Clock High (n > 1)	2T − 35		ns	1
T_{XHQX}	RXD Output Data Hold after TXD Clock High (n = 1)	T − 35		ns	1
T_{XHQZ}	RXD Output Data Float after Last TXD Clock High		T + 20	ns	1
T_{DVXH}	RXD Input Data Setup to TXD Clock High	T + 20		ns	1
T_{XHDX}	RXD Input Data Hold after TXD Clock High	0		ns	1

NOTES:
1. See Figure 12 for waveforms.
2. n is the value of the BxCMP register ignoring the ICLK Bit (i.e., ICLK = 0).

AC TEST CONDITIONS

The AC specifications are tested with the 50 pF load shown in Figure 7. See the Derating Curves section to see how timings vary with load capacitance.

Specifications are measured at the $V_{CC}/2$ crossing point, unless otherwise specified. See AC Timing Waveforms, for AC specification definitions, test pins, and illustrations.

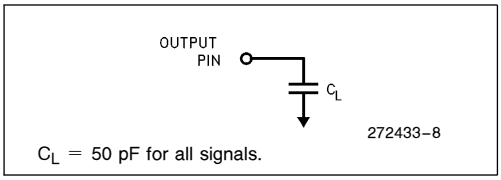


Figure 7. AC Test Load

AC TIMING WAVEFORMS


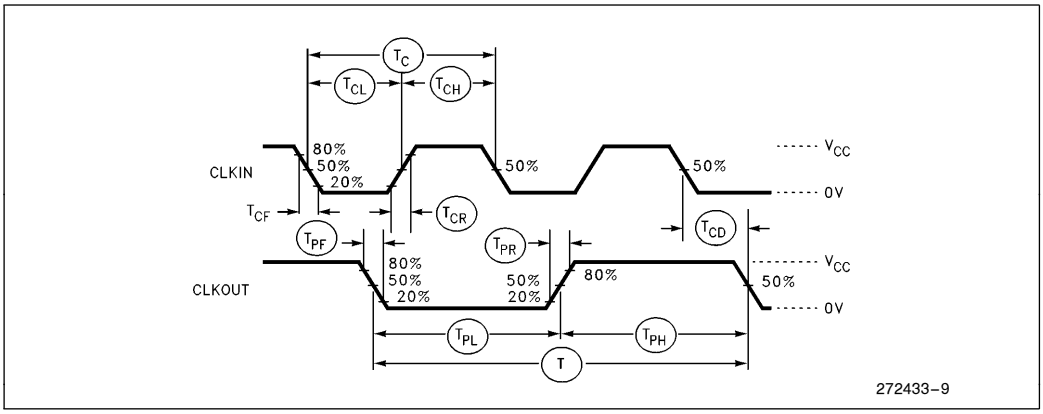


Figure 8. Input and Output Clock Waveform

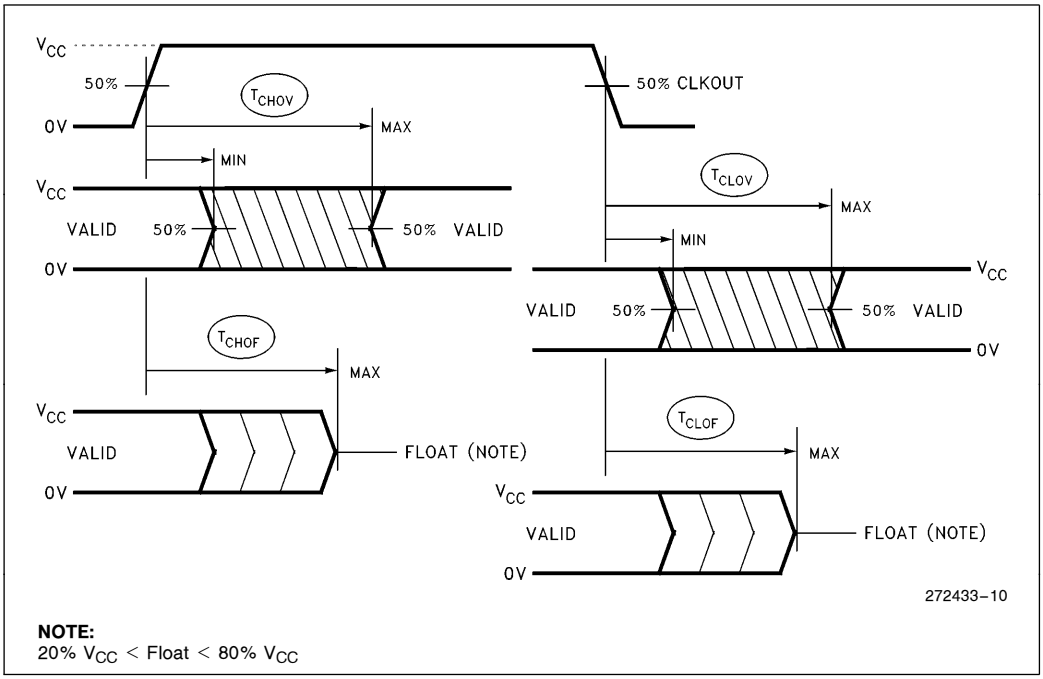

NOTE:
20% V_{CC} < Float < 80% V_{CC}

Figure 9. Output Delay and Float Waveform


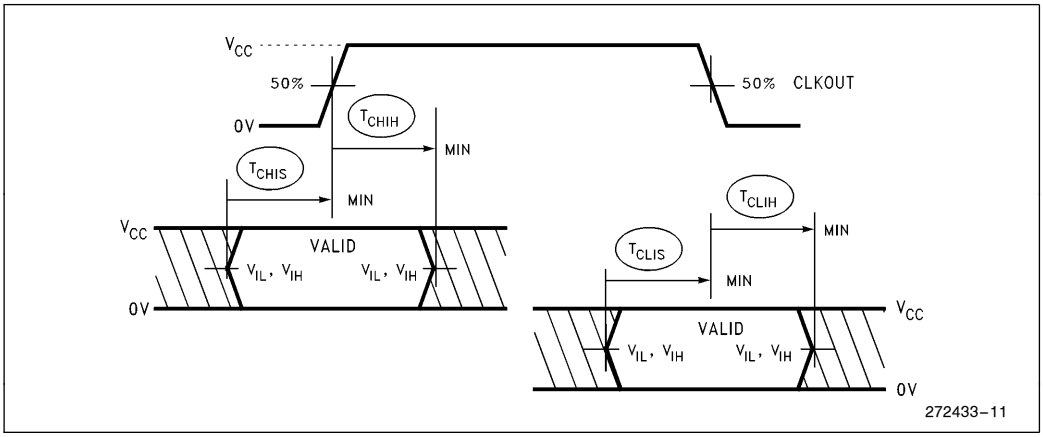


Figure 10. Input Setup and Hold

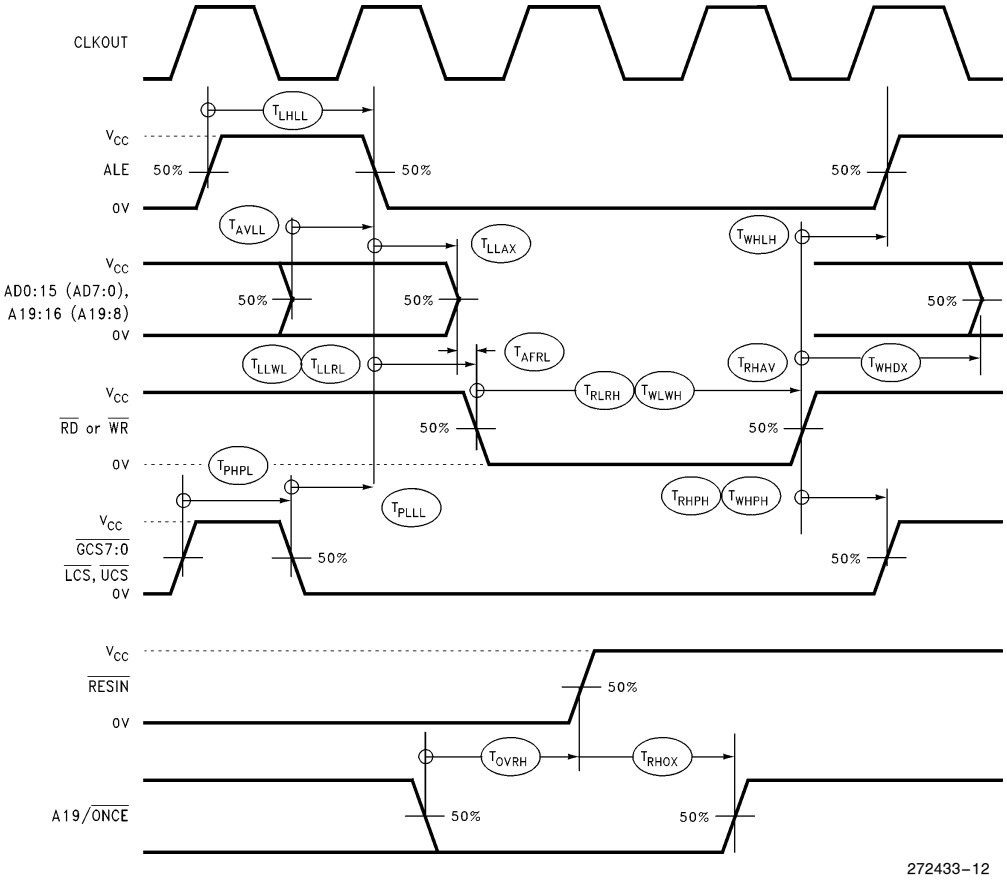

NOTE:
Pin names in parentheses apply to 80C188EB/80L188EB

Figure 11. Relative Signal Waveform

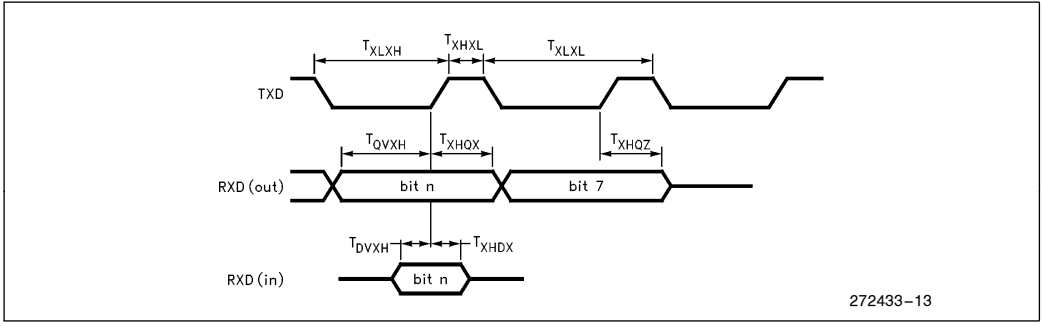


Figure 12. Serial Port Mode 0 Waveform

DERATING CURVES

TYPICAL OUTPUT DELAY VARIATIONS VERSUS LOAD CAPACITANCE

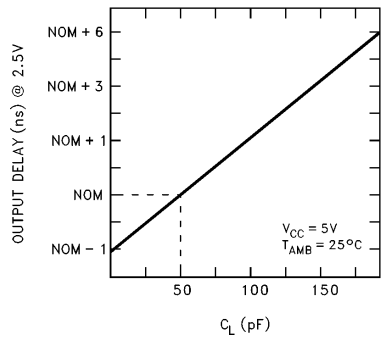


Figure 13

TYPICAL RISE AND FALL VARIATIONS VERSUS LOAD CAPACITANCE




Figure 14


RESET

The processor will perform a reset operation any time the RESIN pin active. The RESIN pin is actually synchronized before it is presented internally, which means that the clock must be operating before a reset can take effect. From a power-on state, RESIN must be held active (low) in order to guarantee correct initialization of the processor. **Failure to provide RESIN while the device is powering up will result in unspecified operation of the device.**

Figure 14 shows the correct reset sequence when first applying power to the processor. An external clock connected to CLKIN must not exceed the V_{CC} threshold being applied to the processor. This is normally not a problem if the clock driver is supplied with the same V_{CC} that supplies the processor. When attaching a crystal to the device, RESIN must remain active until both V_{CC} and CLKOUT are stable (the length of time is application specific and depends on the startup characteristics of the crystal circuit). The RESIN pin is designed to operate correctly using an RC reset circuit, but the designer must ensure that the ramp time for V_{CC} is not so long that RESIN is never really sampled at a logic low level when V_{CC} reaches minimum operating conditions.


Figure 16 shows the timing sequence when RESIN is applied after V_{CC} is stable and the device has been operating. Note that a reset will terminate all activity and return the processor to a known operating state. Any bus operation that is in progress at the time RESIN is asserted will terminate immediately (note that most control signals will be driven to their inactive state first before floating).

While RESIN is active, bus signals LOCK, A19/ONCE, and A18:16 are configured as inputs and weakly held high by internal pullup transistors. Only 19/ONCE can be overdriven to a low and is used to enable ONCE Mode. Forcing LOCK or A18:16 low at any time while RESIN is low is prohibited and will cause unspecified device operation.

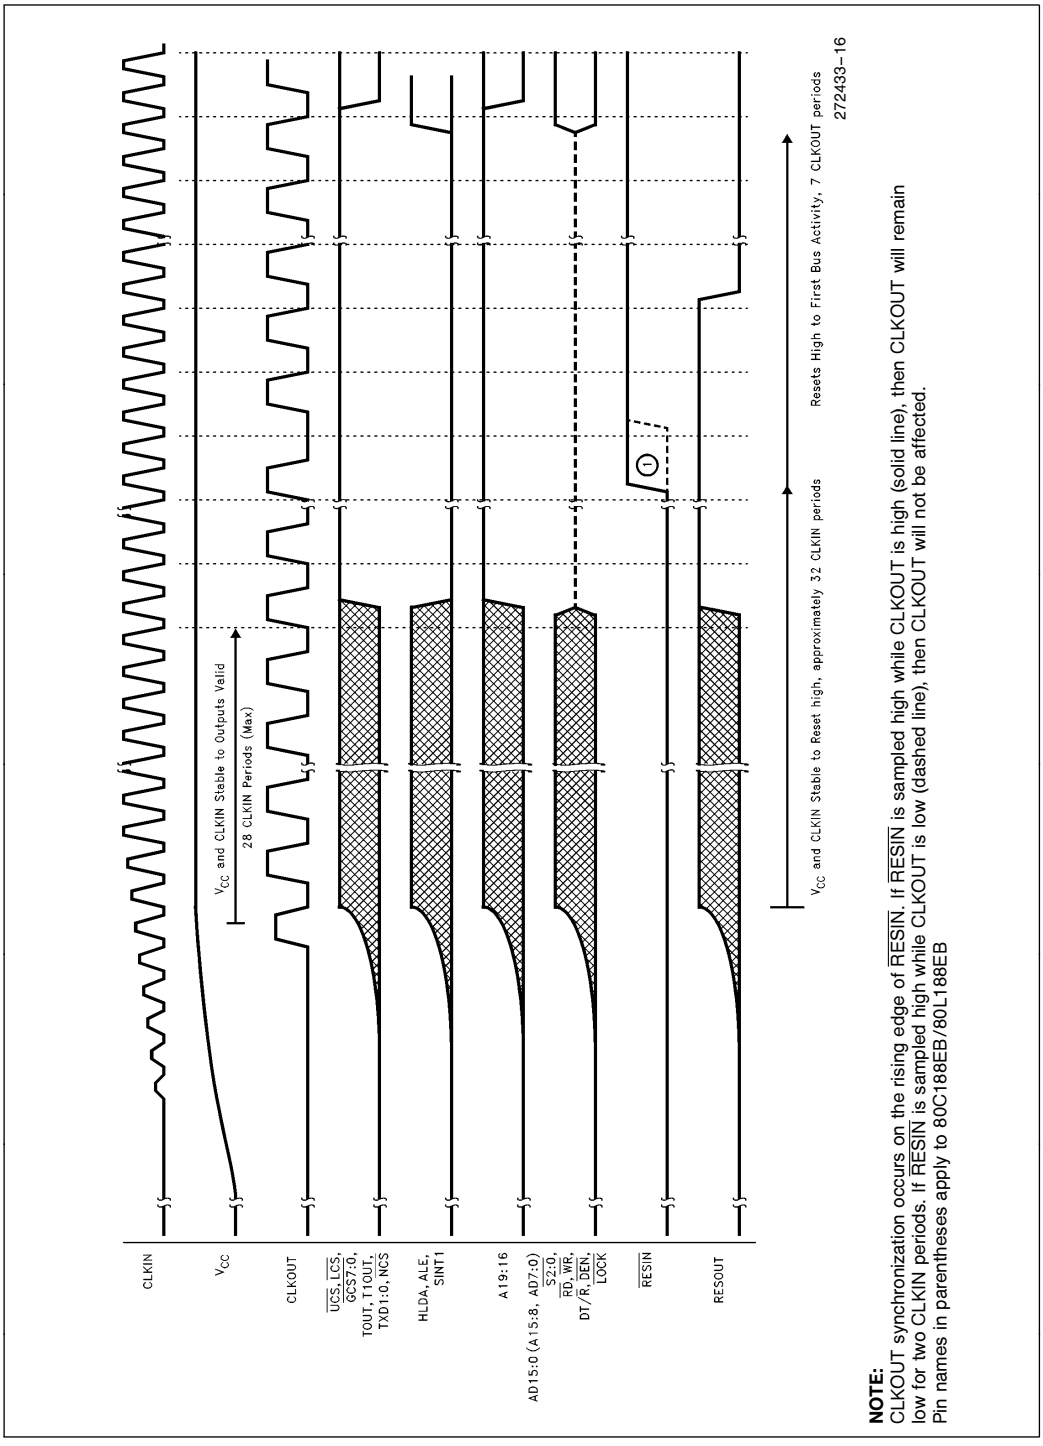

NOTE:
CLKOUT synchronization occurs on the rising edge of $\overline{RESIN}$. If $\overline{RESIN}$ is sampled high while CLKOUT is high (solid line), then CLKOUT will remain low for two CLKIN periods. If $\overline{RESIN}$ is sampled high while CLKOUT is low (dashed line), then CLKOUT will not be affected.
Pin names in parentheses apply to 80C188EB/80L188EB

Figure 15. Cold Reset Waveforms

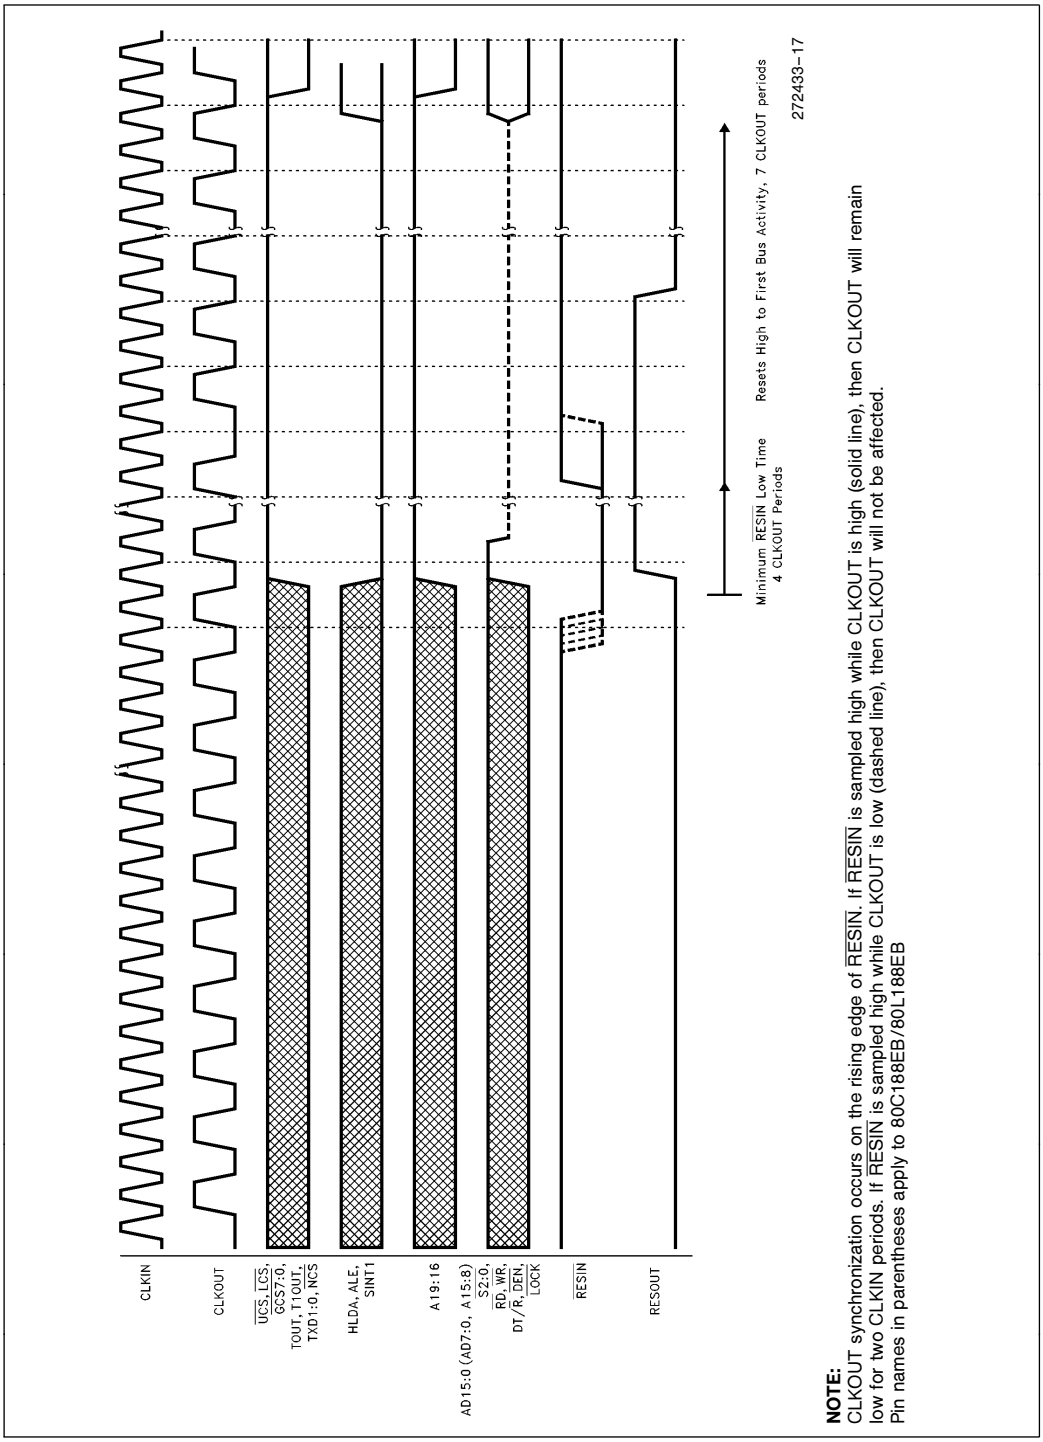


NOTE:
CLKOUT synchronization occurs on the rising edge of $\overline{\text{RESIN}}$. If $\overline{\text{RESIN}}$ is sampled high while CLKOUT is high (solid line), then CLKOUT will remain low for two CLKIN periods. If $\overline{\text{RESIN}}$ is sampled high while CLKOUT is low (dashed line), then CLKOUT will not be affected.
Pin names in parentheses apply to 80C188EB/80L188EB

Figure 16. Warm Reset Waveforms


BUS CYCLE WAVEFORMS

Figures 17 through 23 present the various bus cycles that are generated by the processor. What is shown in the figure is the relationship of the various bus signals to CLKOUT. These figures along with the information present in **AC Specifications** allow the user to determine all the critical timing analysis needed for a given application.

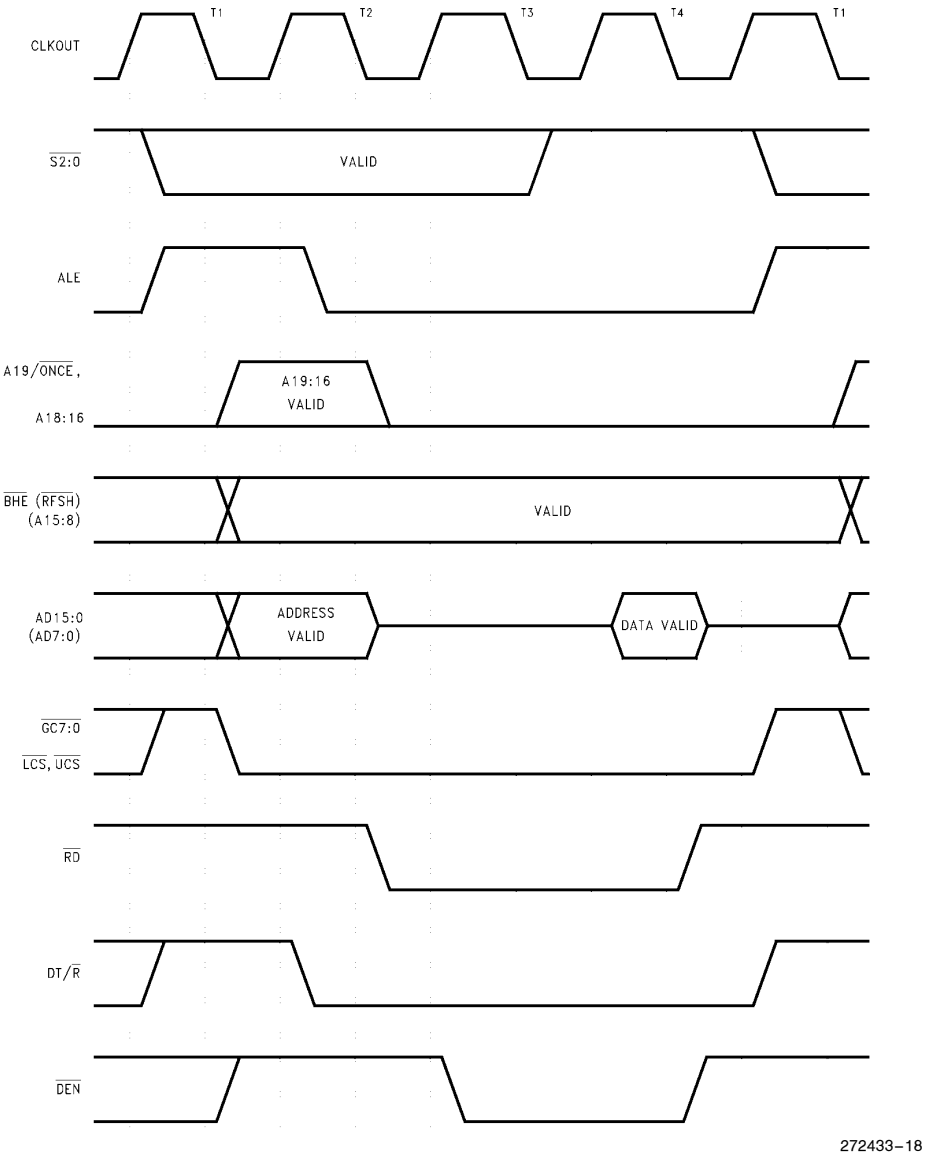


NOTE:
Pin names in parentheses apply to 80C188EB/80L188EB

Figure 17. Read, Fetch, and Refresh Cycle Waveforms

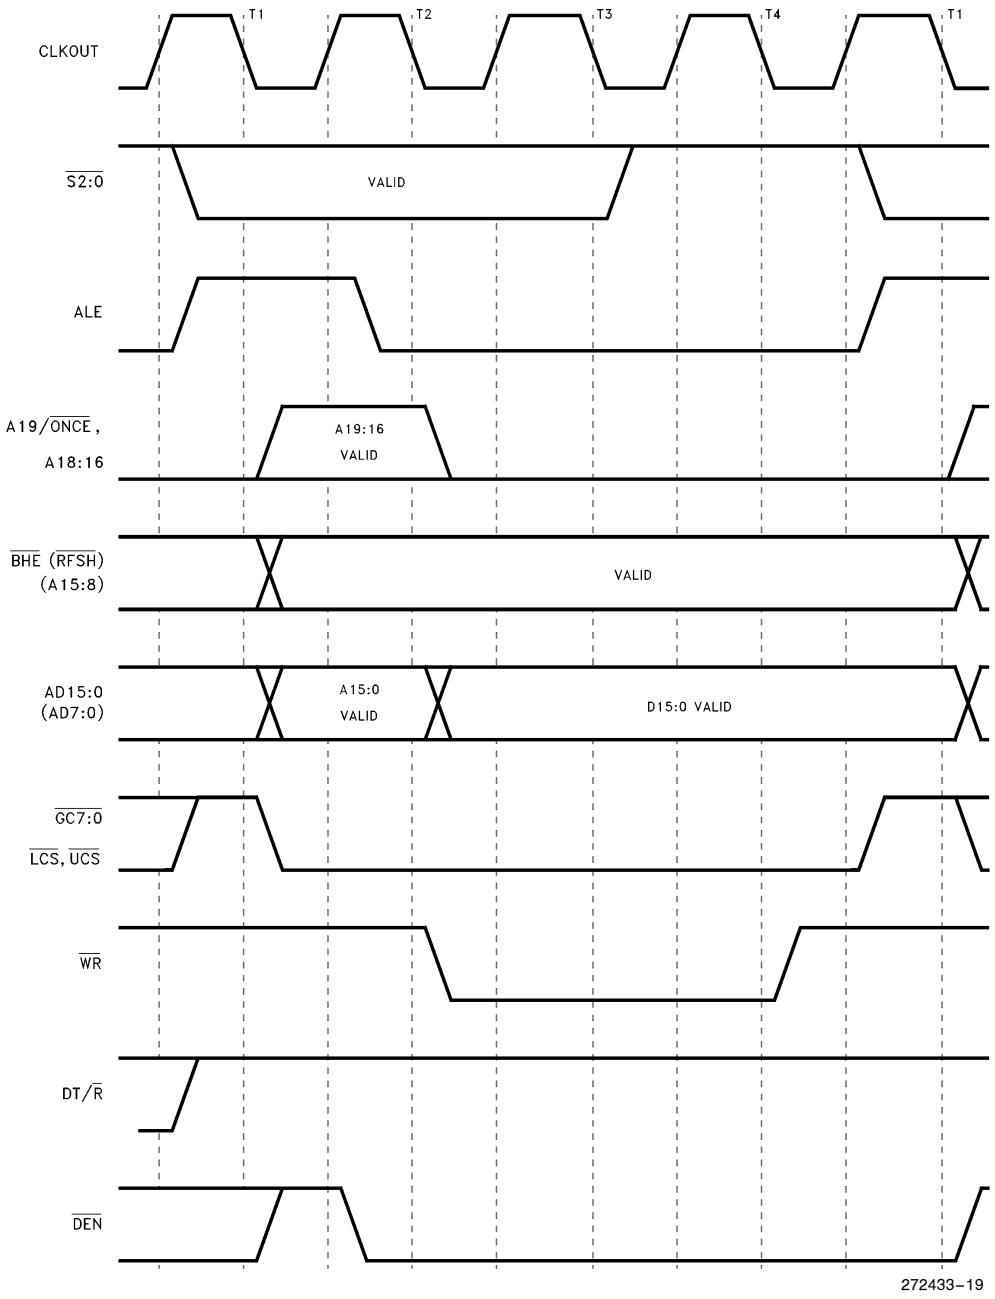


NOTE:
Pin names in parentheses apply to 80C188EB/80L188EB

Figure 18. Write Cycle Waveforms

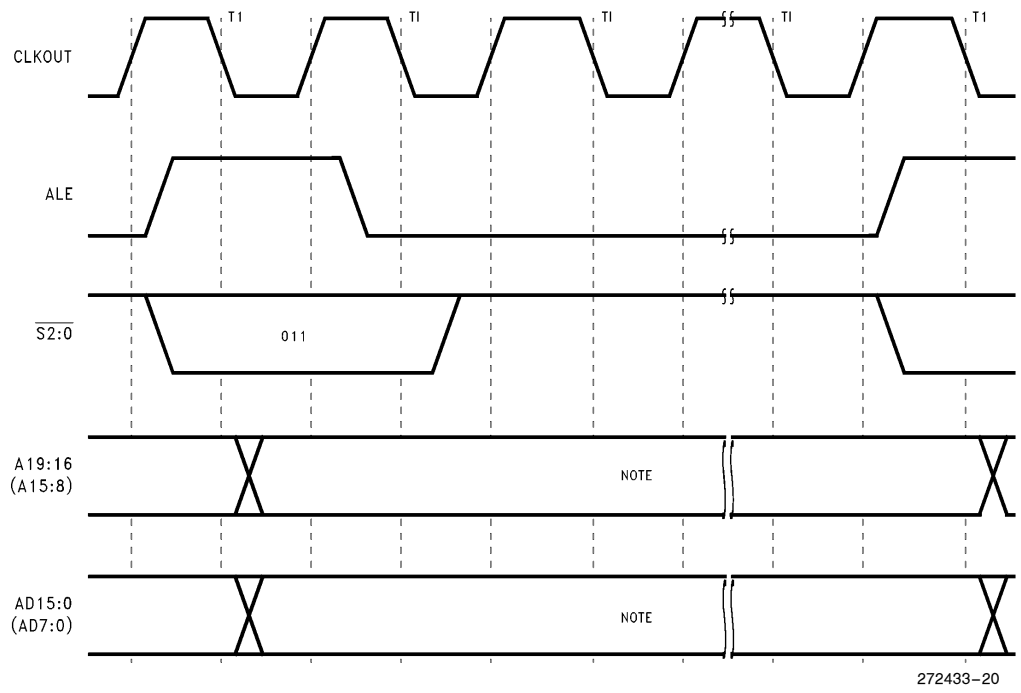


NOTE:
The address driven is typically the location of the next instruction prefetch. Under a majority of instruction sequences the AD15:0 (AD7:0) bus will float, while the A19:16 (A19:8) bus remains driven and all bus control signals are driven to their inactive state.
Pin names in parentheses apply to 80C188EB/80L188EB

Figure 19. Halt Cycle Waveforms

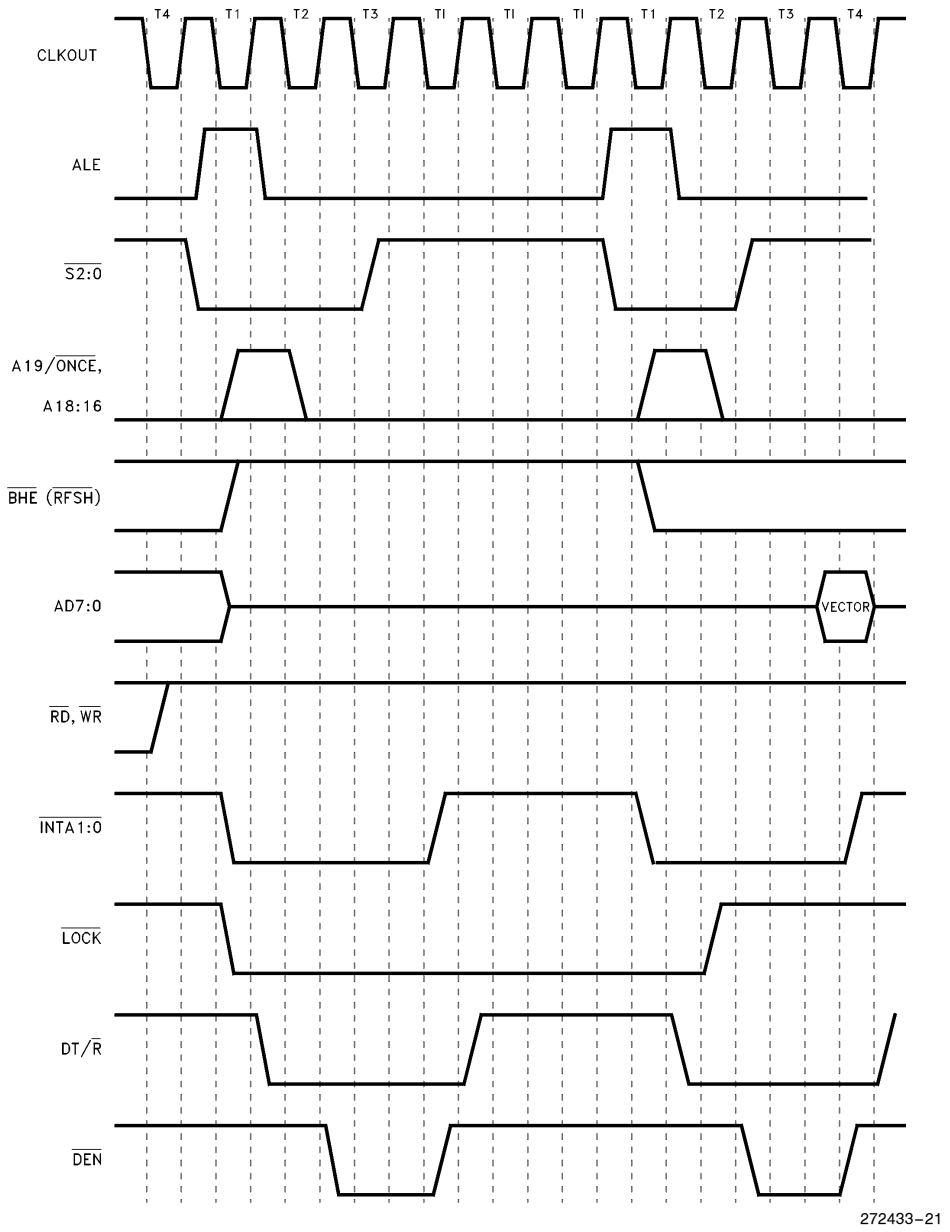


NOTE:
Pin names in parentheses apply to 80C188EB/80L188EB

Figure 20. Interrupt Acknowledge Cycle Waveform

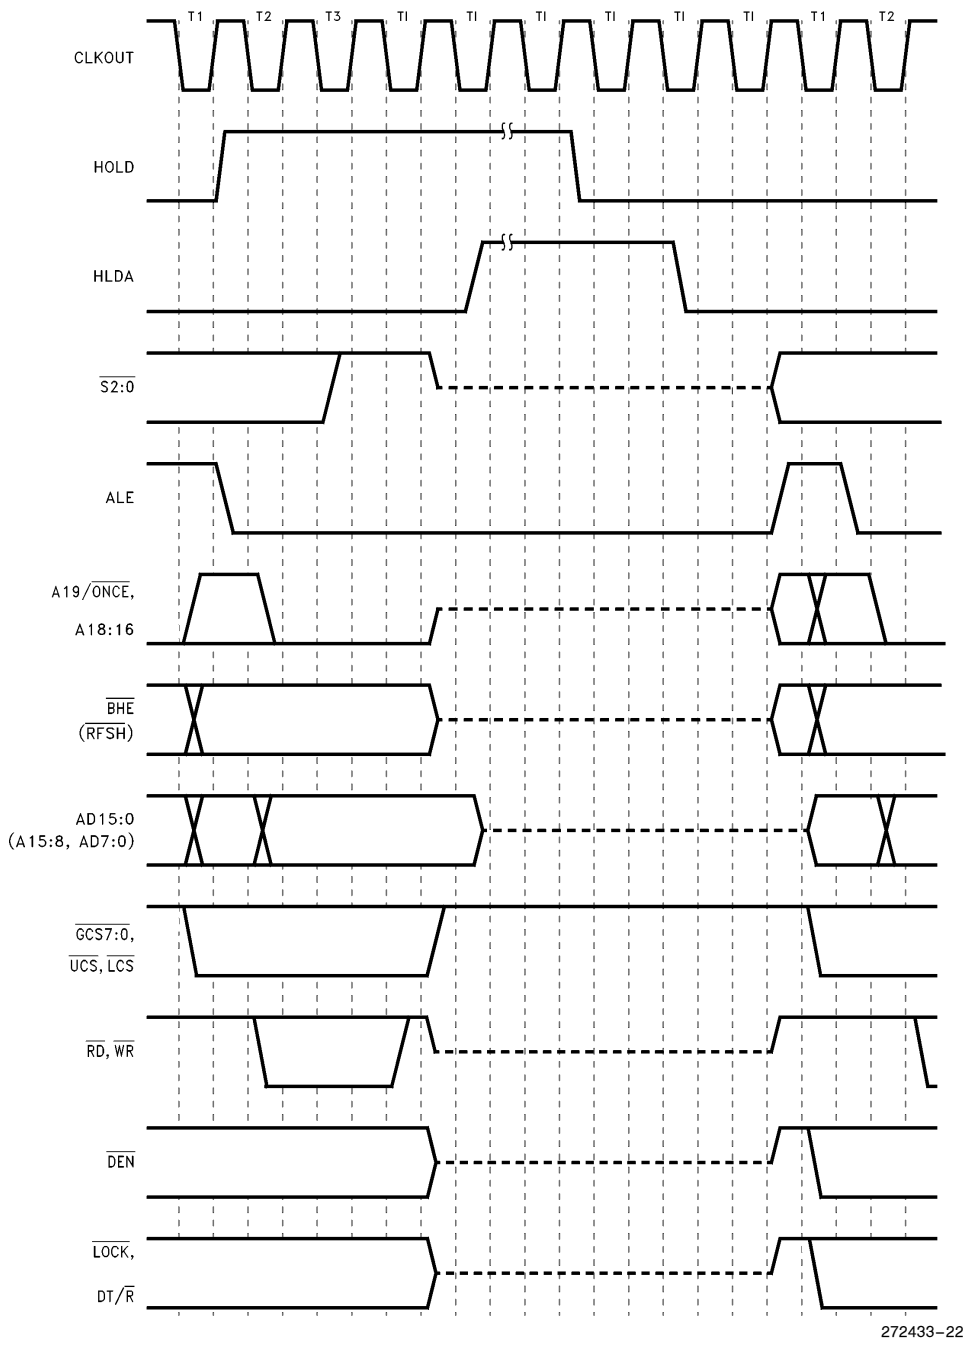


NOTE:
Pin names in parentheses apply to 80C188EB/80L188EB

Figure 21. HOLD/HLDA Waveforms

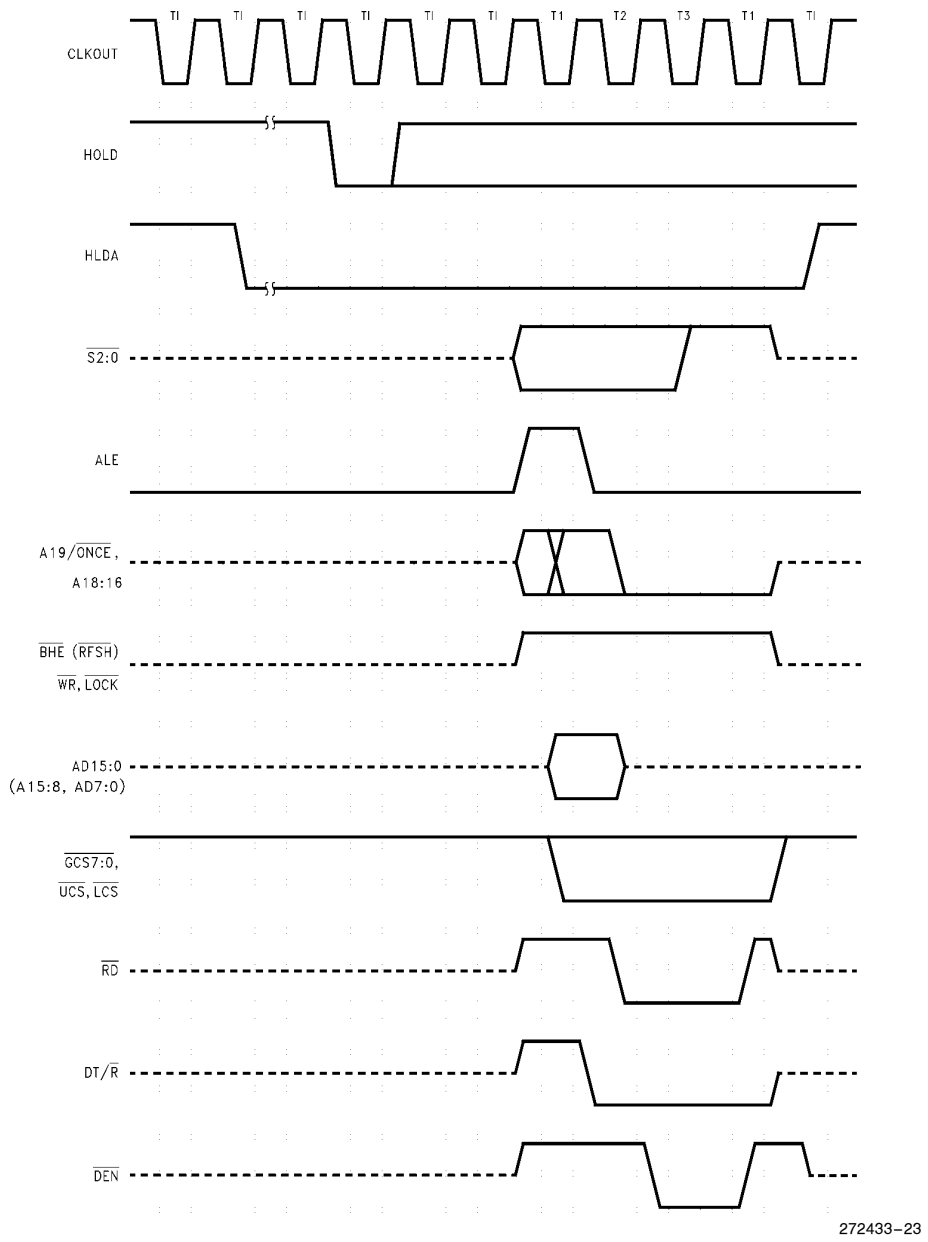

NOTES:
1. READY must be low by either edge to cause a wait state.
2. Lighter lines indicate READ cycles, darker lines indicate WRITE cycles.
Pin names in parentheses apply to 80C188EB/80L188EB

Figure 22. Refresh during Hold Acknowledge

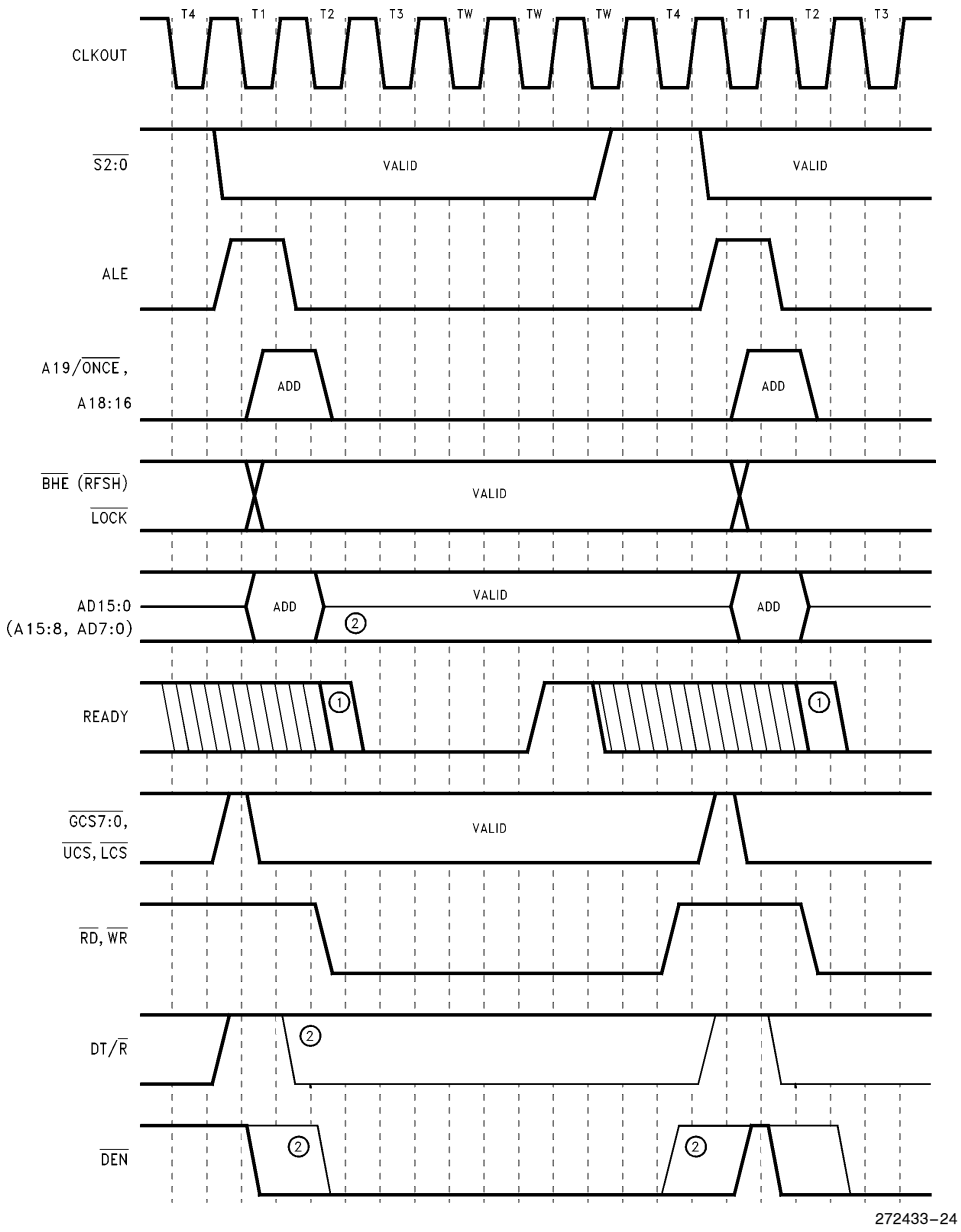

NOTES:
1. READY must be low by either edge to cause a wait state.
2. Lighter lines indicate READ cycles, darker lines indicate WRITE cycles.
Pin names in parentheses apply to 80C188EB/80L188EB

Figure 23. Ready Waveforms

EXECUTION TIMINGS

A determination of program execution timing must consider the bus cycles necessary to prefetch instructions as well as the number of execution unit cycles necessary to execute instructions. The following instruction timings represent the **minimum** execution time in clock cycles for each instruction. The timings given are based on the following assumptions:

- The opcode, along with any data or displacement required for execution of a particular instruction, has been prefetched and resides in the queue at the time it is needed.
- No wait states or bus HOLDs occur.
- All word-data is located on even-address boundaries (80C186EB only).

All jumps and calls include the time required to fetch the opcode of the next instruction at the destination address.

All instructions which involve memory accesses can require one or two additional clocks above the minimum timings shown due to the asynchronous handshake between the bus interface unit (BIU) and execution unit.

With a 16-bit BIU, the 80C186EB has sufficient bus performance to ensure that an adequate number of prefetched bytes will reside in the queue (6 bytes) most of the time. Therefore, actual program execution time will not be substantially greater than that derived from adding the instruction timings shown.

The 80C188EB 8-bit BIU is limited in its performance relative to the execution unit. A sufficient number of prefetched bytes may not reside in the prefetch queue (4 bytes) much of the time. Therefore, actual program execution time will be substantially greater than that derived from adding the instruction timings shown.

INSTRUCTION SET SUMMARY

Function	Format				80C186EB Clock Cycles	80C188EB Clock Cycles	Comments
DATA TRANSFER							
MOV = Move:							
Register to Register/Memory	1 0 0 0 1 0 0 w	mod reg r/m			2/12	2/12*	
Register/memory to register	1 0 0 0 1 0 1 w	mod reg r/m			2/9	2/9*	
Immediate to register/memory	1 1 0 0 0 1 1 w	mod 000 r/m	data	data if w = 1	12/13	12/13	8/16-bit
Immediate to register	1 0 1 1 w reg	data	data if w = 1		3/4	3/4	8/16-bit
Memory to accumulator	1 0 1 0 0 0 0 w	addr-low	addr-high		8	8*	
Accumulator to memory	1 0 1 0 0 0 1 w	addr-low	addr-high		9	9*	
Register/memory to segment register	1 0 0 0 1 1 1 0	mod 0 reg r/m			2/9	2/13	
Segment register to register/memory	1 0 0 0 1 1 0 0	mod 0 reg r/m			2/11	2/15	
PUSH = Push:							
Memory	1 1 1 1 1 1 1 1	mod 1 1 0 r/m			16	20	
Register	0 1 0 1 0 reg				10	14	
Segment register	0 0 0 reg 1 1 0				9	13	
Immediate	0 1 1 0 1 0 s 0	data	data if s = 0		10	14	
PUSHA = Push All	0 1 1 0 0 0 0 0				36	68	
POP = Pop:							
Memory	1 0 0 0 1 1 1 1	mod 0 0 0 r/m			20	24	
Register	0 1 0 1 1 reg				10	14	
Segment register	0 0 0 reg 1 1 1	(reg≠01)			8	12	
POPA = Pop All	0 1 1 0 0 0 0 1				51	83	
XCHG = Exchange:							
Register/memory with register	1 0 0 0 0 1 1 w	mod reg r/m			4/17	4/17*	
Register with accumulator	1 0 0 1 0 reg				3	3	
IN = Input from:							
Fixed port	1 1 1 0 0 1 0 w	port			10	10*	
Variable port	1 1 1 0 1 1 0 w				8	8*	
OUT = Output to:							
Fixed port	1 1 1 0 0 1 1 w	port			9	9*	
Variable port	1 1 1 0 1 1 1 w				7	7*	
XLAT = Translate byte to AL	1 1 0 1 0 1 1 1				11	15	
LEA = Load EA to register	1 0 0 0 1 1 0 1	mod reg r/m			6	6	
LDS = Load pointer to DS	1 1 0 0 0 1 0 1	mod reg r/m	(mod≠11)		18	26	
LES = Load pointer to ES	1 1 0 0 0 1 0 0	mod reg r/m	(mod≠11)		18	26	
LAHF = Load AH with flags	1 0 0 1 1 1 1 1				2	2	
SAHF = Store AH into flags	1 0 0 1 1 1 1 0				3	3	
PUSHF = Push flags	1 0 0 1 1 1 0 0				9	13	
POPF = Pop flags	1 0 0 1 1 1 0 1				8	12	

Shaded areas indicate instructions not available in 8086/8088 microsystems.

NOTE:
*Clock cycles shown for byte transfers. For word operations, add 4 clock cycles for all memory transfers.

INSTRUCTION SET SUMMARY (Continued)

Function	Format	80C186EB Clock Cycles	80C188EB Clock Cycles	Comments
DATA TRANSFER (Continued)				
SEGMENT = Segment Override:				
CS	00101110	2	2	
SS	00110110	2	2	
DS	00111110	2	2	
ES	00100110	2	2	
ARITHMETIC				
ADD = Add:				
Reg/memory with register to either	000000dw | mod reg r/m	3/10	3/10*	
Immediate to register/memory	100000sw | mod 000 r/m | data | data if s w=01	4/16	4/16*	
Immediate to accumulator	0000010w | data | data if w=1	3/4	3/4	8/16-bit
ADC = Add with carry:				
Reg/memory with register to either	000100dw | mod reg r/m	3/10	3/10*	
Immediate to register/memory	100000sw | mod 010 r/m | data | data if s w=01	4/16	4/16*	
Immediate to accumulator	0001010w | data | data if w=1	3/4	3/4	8/16-bit
INC = Increment:				
Register/memory	1111111w | mod 000 r/m	3/15	3/15*	
Register	01000 reg	3	3	
SUB = Subtract:				
Reg/memory and register to either	001010dw | mod reg r/m	3/10	3/10*	
Immediate from register/memory	100000sw | mod 101 r/m | data | data if s w=01	4/16	4/16*	
Immediate from accumulator	0010110w | data | data if w=1	3/4	3/4	8/16-bit
SBB = Subtract with borrow:				
Reg/memory and register to either	000110dw | mod reg r/m	3/10	3/10*	
Immediate from register/memory	100000sw | mod 011 r/m | data | data if s w=01	4/16	4/16*	
Immediate from accumulator	0001110w | data | data if w=1	3/4	3/4*	8/16-bit
DEC = Decrement				
Register/memory	1111111w | mod 001 r/m	3/15	3/15*	
Register	01001 reg	3	3	
CMP = Compare:				
Register/memory with register	0011101w | mod reg r/m	3/10	3/10*	
Register with register/memory	0011100w | mod reg r/m	3/10	3/10*	
Immediate with register/memory	100000sw | mod 111 r/m | data | data if s w=01	3/10	3/10*	
Immediate with accumulator	0011110w | data | data if w=1	3/4	3/4	8/16-bit
NEG = Change sign register/memory	1111011w | mod 011 r/m	3/10	3/10*	
AAA = ASCII adjust for add	00110111	8	8	
DAA = Decimal adjust for add	00100111	4	4	
AAS = ASCII adjust for subtract	00111111	7	7	
DAS = Decimal adjust for subtract	00101111	4	4	
MUL = Multiply (unsigned):	1111011w | mod 100 r/m			
Register-Byte		26–28	26–28	
Register-Word		35–37	35–37	
Memory-Byte		32–34	32–34	
Memory-Word		41–43	41–43*	

Shaded areas indicate instructions not available in 8086/8088 microsystems.

NOTE:
*Clock cycles shown for byte transfers. For word operations, add 4 clock cycles for all memory transfers.

INSTRUCTION SET SUMMARY (Continued)

Function	Format	80C186EB Clock Cycles	80C188EB Clock Cycles	Comments
ARITHMETIC (Continued)				
IMUL = Integer multiply (signed):	1 1 1 1 0 1 1 w | mod 1 0 1 r/m			
Register-Byte		25–28	25–28	
Register-Word		34–37	34–37	
Memory-Byte		31–34	31–34	
Memory-Word		40–43	40–43*	
IMUL = Integer Immediate multiply (signed)	0 1 1 0 1 0 s 1 | mod reg r/m | data | data if s = 0	22–25/ 29–32	22–25/ 29–32	
DIV = Divide (unsigned):	1 1 1 1 0 1 1 w | mod 1 1 0 r/m			
Register-Byte		29	29	
Register-Word		38	38	
Memory-Byte		35	35	
Memory-Word		44	44*	
IDIV = Integer divide (signed):	1 1 1 1 0 1 1 w | mod 1 1 1 r/m			
Register-Byte		44–52	44–52	
Register-Word		53–61	53–61	
Memory-Byte		50–58	50–58	
Memory-Word		59–67	59–67*	
AAM = ASCII adjust for multiply	1 1 0 1 0 1 0 0 | 0 0 0 0 1 0 1 0	19	19	
AAD = ASCII adjust for divide	1 1 0 1 0 1 0 1 | 0 0 0 0 1 0 1 0	15	15	
CBW = Convert byte to word	1 0 0 1 1 0 0 0	2	2	
CWD = Convert word to double word	1 0 0 1 1 0 0 1	4	4	
LOGIC				
Shift/Rotate Instructions:				
Register/Memory by 1	1 1 0 1 0 0 0 w | mod TTT r/m	2/15	2/15	
Register/Memory by CL	1 1 0 1 0 0 1 w | mod TTT r/m	5+n/17+n	5+n/17+n	
Register/Memory by Count	1 1 0 0 0 0 0 w | mod TTT r/m | count	5+n/17+n	5+n/17+n	
	TTT Instruction 0 0 0 ROL 0 0 1 ROR 0 1 0 RCL 0 1 1 RCR 1 0 0 SHL/SAL 1 0 1 SHR 1 1 1 SAR			
AND = **And:**				
Reg/memory and register to either	0 0 1 0 0 0 d w | mod reg r/m	3/10	3/10*	
Immediate to register/memory	1 0 0 0 0 0 0 w | mod 1 0 0 r/m | data | data if w = 1	4/16	4/16*	
Immediate to accumulator	0 0 1 0 0 1 0 w | data | data if w = 1	3/4	3/4*	8/16-bit
TEST = **And function to flags, no result:**				
Register/memory and register	1 0 0 0 0 1 0 w | mod reg r/m	3/10	3/10*	
Immediate data and register/memory	1 1 1 1 0 1 1 w | mod 0 0 0 r/m | data | data if w = 1	4/10	4/10*	
Immediate data and accumulator	1 0 1 0 1 0 0 w | data | data if w = 1	3/4	3/4	8/16-bit
OR = **Or:**				
Reg/memory and register to either	0 0 0 0 1 0 d w | mod reg r/m	3/10	3/10*	
Immediate to register/memory	1 0 0 0 0 0 0 w | mod 0 0 1 r/m | data | data if w = 1	4/16	4/16*	
Immediate to accumulator	0 0 0 0 1 1 0 w | data | data if w = 1	3/4	3/4*	8/16-bit

Shaded areas indicate instructions not available in 8086/8088 microsystems.

NOTE:
*Clock cycles shown for byte transfers. For word operations, add 4 clock cycles for all memory transfers.

INSTRUCTION SET SUMMARY (Continued)

Function	Format	80C186EB Clock Cycles	80C188EB Clock Cycles	Comments
LOGIC (Continued)				
XOR = **Exclusive or:**				
Reg/memory and register to either	0 0 1 1 0 0 d w | mod reg r/m	3/10	3/10*	
Immediate to register/memory	1 0 0 0 0 0 0 w | mod 1 1 0 r/m | data | data if w = 1	4/16	4/16*	
Immediate to accumulator	0 0 1 1 0 1 0 w | data | data if w = 1	3/4	3/4	8/16-bit
NOT = Invert register/memory	1 1 1 1 0 1 1 w | mod 0 1 0 r/m	3/10	3/10*	
STRING MANIPULATION				
MOVS = Move byte/word	1 0 1 0 0 1 0 w	14	14*	
CMPS = Compare byte/word	1 0 1 0 0 1 1 w	22	22*	
SCAS = Scan byte/word	1 0 1 0 1 1 1 w	15	15*	
LODS = Load byte/wd to AL/AX	1 0 1 0 1 1 0 w	12	12*	
STOS = Store byte/wd from AL/AX	1 0 1 0 1 0 1 w	10	10*	
INS = Input byte/wd from DX port	0 1 1 0 1 1 0 w	14	14	
OUTS = Output byte/wd to DX port	0 1 1 0 1 1 1 w	14	14	
Repeated by count in CX (REP/REPE/REPZ/REPNE/REPNZ)				
MOVS = Move string	1 1 1 1 0 0 1 0 | 1 0 1 0 0 1 0 w	8+8n	8+8n*	
CMPS = Compare string	1 1 1 1 0 0 1 z | 1 0 1 0 0 1 1 w	5+22n	5+22n*	
SCAS = Scan string	1 1 1 1 0 0 1 z | 1 0 1 0 1 1 1 w	5+15n	5+15n*	
LODS = Load string	1 1 1 1 0 0 1 0 | 1 0 1 0 1 1 0 w	6+11n	6+11n*	
STOS = Store string	1 1 1 1 0 0 1 0 | 1 0 1 0 1 0 1 w	6+9n	6+9n*	
INS = Input string	1 1 1 1 0 0 1 0 | 0 1 1 0 1 1 0 w	8+8n	8+8n*	
OUTS = Output string	1 1 1 1 0 0 1 0 | 0 1 1 0 1 1 1 w	8+8n	8+8n*	
CONTROL TRANSFER				
CALL = **Call:**				
Direct within segment	1 1 1 0 1 0 0 0 | disp-low | disp-high	15	19	
Register/memory indirect within segment	1 1 1 1 1 1 1 1 | mod 0 1 0 r/m	13/19	17/27	
Direct intersegment	1 0 0 1 1 0 1 0 | segment offset | segment selector	23	31	
Indirect intersegment	1 1 1 1 1 1 1 1 | mod 0 1 1 r/m (mod ≠ 11)	38	54	
JMP = **Unconditional jump:**				
Short/long	1 1 1 0 1 0 1 1 | disp-low	14	14	
Direct within segment	1 1 1 0 1 0 0 1 | disp-low | disp-high	14	14	
Register/memory indirect within segment	1 1 1 1 1 1 1 1 | mod 1 0 0 r/m	11/17	11/21	
Direct intersegment	1 1 1 0 1 0 1 0 | segment offset | segment selector	14	14	
Indirect intersegment	1 1 1 1 1 1 1 1 | mod 1 0 1 r/m (mod ≠ 11)	26	34	

Shaded areas indicate instructions not available in 8086/8088 microsystems.

NOTE:
*Clock cycles shown for byte transfers. For word operations, add 4 clock cycles for all memory transfers.

INSTRUCTION SET SUMMARY (Continued)

Function	Format	80C186EB Clock Cycles	80C188EB Clock Cycles	Comments
CONTROL TRANSFER (Continued)				
RET = **Return from CALL:**				
Within segment	11000011	16	20	
Within seg adding immed to SP	11000010 data-low data-high	18	22	
Intersegment	11001011	22	30	
Intersegment adding immediate to SP	11001010 data-low data-high	25	33	
JE/JZ = Jump on equal/zero	01110100 disp	4/13	4/13	JMP not taken/JMP taken
JL/JNGE = Jump on less/not greater or equal	01111100 disp	4/13	4/13	
JLE/JNG = Jump on less or equal/not greater	01111110 disp	4/13	4/13	
JB/JNAE = Jump on below/not above or equal	01110010 disp	4/13	4/13	
JBE/JNA = Jump on below or equal/not above	01110110 disp	4/13	4/13	
JP/JPE = Jump on parity/parity even	01111010 disp	4/13	4/13	
JO = Jump on overflow	01110 000 disp	4/13	4/13	
JS = Jump on sign	01111000 disp	4/13	4/13	
JNE/JNZ = Jump on not equal/not zero	01110101 disp	4/13	4/13	
JNL/JGE = Jump on not less/greater or equal	01111101 disp	4/13	4/13	
JNLE/JG = Jump on not less or equal/greater	01111111 disp	4/13	4/13	
JNB/JAE = Jump on not below/above or equal	01110011 disp	4/13	4/13	
JNBE/JA = Jump on not below or equal/above	01110111 disp	4/13	4/13	
JNP/JPO = Jump on not par/par odd	01111011 disp	4/13	4/13	
JNO = Jump on not overflow	01110001 disp	4/13	4/13	
JNS = Jump on not sign	01111001 disp	4/13	4/13	
JCXZ = Jump on CX zero	11100011 disp	5/15	5/15	
LOOP = Loop CX times	11100010 disp	6/16	6/16	LOOP not taken/LOOP taken
LOOPZ/LOOPE = Loop while zero/equal	11100001 disp	6/16	6/16	
LOOPNZ/LOOPNE = Loop while not zero/equal	11100000 disp	6/16	6/16	
ENTER = Enter Procedure	11001000 data-low data-high L			
L = 0		15	19	
L = 1		25	29	
L > 1		22+16(n−1)	26+20(n−1)	
LEAVE = Leave Procedure	11001001	8	8	
INT = **Interrupt:**				
Type specified	11001101 type	47	47	
Type 3	11001100	45	45	if INT. taken/ if INT. not taken
INTO = Interrupt on overflow	11001110	48/4	48/4	
IRET = Interrupt return	11001111	28	28	
BOUND = Detect value out of range	01100010 mod reg r/m	33–35	33–35	

Shaded areas indicate instructions not available in 8086/8088 microsystems.

NOTE:
*Clock cycles shown for byte transfers. For word operations, add 4 clock cycles for all memory transfers.

INSTRUCTION SET SUMMARY (Continued)

Function	Format	80C186EB Clock Cycles	80C188EB Clock Cycles	Comments
PROCESSOR CONTROL				
CLC = Clear carry	11111000	2	2	
CMC = Complement carry	11110101	2	2	
STC = Set carry	11111001	2	2	
CLD = Clear direction	11111100	2	2	
STD = Set direction	11111101	2	2	
CLI = Clear interrupt	11111010	2	2	
STI = Set interrupt	11111011	2	2	
HLT = Halt	11110100	2	2	
WAIT = Wait	10011011	6	6	if $\overline{TEST}$ = 0
LOCK = Bus lock prefix	11110000	2	2	
NOP = No Operation	10010000	3	3	
	(TTT LLL are opcode to processor extension)			

Shaded areas indicate instructions not available in 8086/8088 microsystems.

NOTE:
*Clock cycles shown for byte transfers. For word operations, add 4 clock cycles for all memory transfers.

FOOTNOTES

The Effective Address (EA) of the memory operand is computed according to the mod and r/m fields:

if mod = 11 then r/m is treated as a REG field
if mod = 00 then DISP = 0*, disp-low and disp-high are absent
if mod = 01 then DISP = disp-low sign-extended to 16-bits, disp-high is absent
if mod = 10 then DISP = disp-high: disp-low
if r/m = 000 then EA = (BX) + (SI) + DISP
if r/m = 001 then EA = (BX) + (DI) + DISP
if r/m = 010 then EA = (BP) + (SI) + DISP
if r/m = 011 then EA = (BP) + (DI) + DISP
if r/m = 100 then EA = (SI) + DISP
if r/m = 101 then EA = (DI) + DISP
if r/m = 110 then EA = (BP) + DISP*
if r/m = 111 then EA = (BX) + DISP

DISP follows 2nd byte of instruction (before data if required)

*except if mod = 00 and r/m = 110 then EA = disp-high: disp-low.

EA calculation time is 4 clock cycles for all modes, and is included in the execution times given whenever appropriate.

Segment Override Prefix

0	0	1	reg	1	1	0

reg is assigned according to the following:

reg	Segment Register
00	ES
01	CS
10	SS
11	DS

REG is assigned according to the following table:

16-Bit (w = 1)	8-Bit (w = 0)
000 AX	000 AL
001 CX	001 CL
010 DX	010 DL
011 BX	011 BL
100 SP	100 AH
101 BP	101 CH
110 SI	110 DH
111 DI	111 BH

The physical addresses of all operands addressed by the BP register are computed using the SS segment register. The physical addresses of the destination operands of the string primitive operations (those addressed by the DI register) are computed using the ES segment, which may not be overridden.

ERRATA

An 80C186EB/80L186EB with a STEPID value of 0001H has the following known errata. A device with a STEPID of 0001H can be visually identified by the **presence** of an **"A"** alpha character next to the FPO number. The FPO number location is shown in Figures 4, 5 and 6.

1. A19/$\overline{\text{ONCE}}$ is not latched by the rising edge of $\overline{\text{RESIN}}$. A19/$\overline{\text{ONCE}}$ must remain active (LOW) at all times to remain in the ONCE Mode. Removing A19/$\overline{\text{ONCE}}$ after $\overline{\text{RESIN}}$ is high will return all output pins to a driving state, however, the 80C186EB will remain in a reset state.
2. During interrupt acknowledge (INTA) bus cycles, the bus controller will ignore the state of the READY pin if the previous bus cycle ignored the state of the READY pin. This errata can only occur if the Chip-Select Unit is being used. All active chip-selects must be programmed to use READY (RDY bit must be programmed to a 1) if wait-states are required for INTA bus cycles.
3. CLKOUT will transition off the **rising** edge of CLKIN rather than the falling edge of CLKIN. This does not affect any bus timings other than T_{CD}.
4. $\overline{\text{RESIN}}$ has a hysterisis of only 130 mV. It is recommended that $\overline{\text{RESIN}}$ be driven by a Schmitt triggered device to avoid processor lockup during reset using an RC circuit.
5. SINT1 will only go active for one clock period when a receive or transmit interrupt is pending (i.e., it does not remain active until the S1STS register is read). If SINT1 is to be connected to any of the processor interrupt lines (INT0–INT4), then it must be latched by user logic.

An 80C186EB/80L186EB with a STEPID value of 0001H or 0002H has the following known errata. A device with a STEPID of 0002H can be visually identified by noting the presence of a ''B'', ''C'', ''D'', or ''E'' alpha character next to the FPO number. The FPO number location is shown in Figures 4, 5 and 6.

1. An internal condition with the interrupt controller can cause no acknowledge cycle on the $\overline{\text{INTA1}}$ line in response to INT1. This errata only occurs when Interrupt 1 is configured in cascade mode and a higher priority interrupt exists. This errata will not occur consistantly, it is dependent on interrupt timing.

REVISION HISTORY

This data sheet replaces the following data sheets:

270803-004	80C186EB
270885-003	80C188EB
270921-003	80L186EB
270920-003	80L188EB
272311-001	SB80C188EB/SB80L188EB
272312-001	SB80C186EB/SB80L186EB