


Series 310 / 410

PCB connectors 2.54 mm
Single row / double row
Surface mount

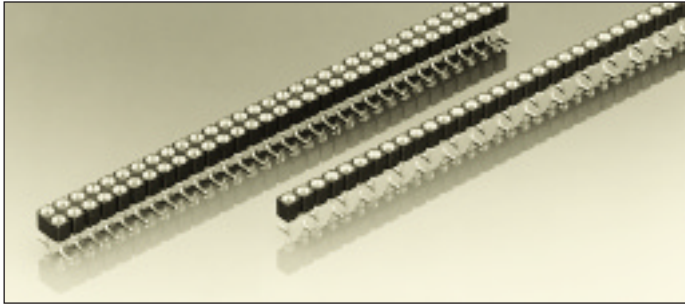

Receptacles, surface mount

Accept pins $\varnothing$ 0.40–0.56 mm




For corresponding pin connectors see pages 43 to 46

Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
97	5 μ m Sn Pb	Goldflash	
99	5 μ m Sn Pb	5 μ m Sn Pb	

Ordering information


Replace **xx** with the number of poles, e.g. 410-91-2xx-41-105
for a double row version with 8 pins per row becomes:
410-91-216-41-105

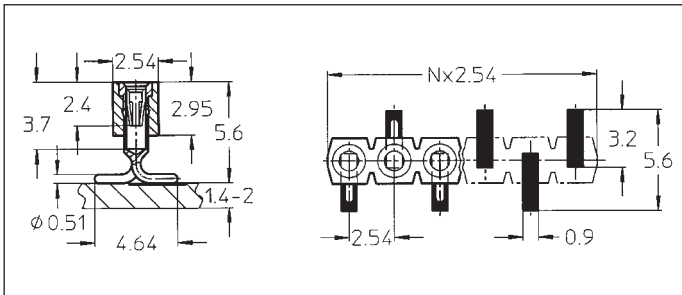

310-91-1xx-41-105
310-93-1xx-41-105
310-97-1xx-41-105
310-99-1xx-41-105

SMD receptacle: single row,
perpendicular mount


Availability from: 3 to 64 contacts
Standard number of contacts 5,
6, 8, 10, 14, 16, 20, 21, 25, 30,
32, 48, 56, 60, 64

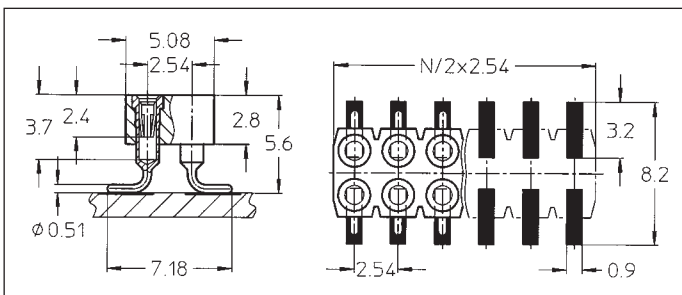

410-91-2xx-41-105
410-93-2xx-41-105
410-97-2xx-41-105
410-99-2xx-41-105

SMD receptacle: double row,
perpendicular mount

Availability from: 4 to 72 contacts
Standard number of contacts 40,
44, 56, 64, 72

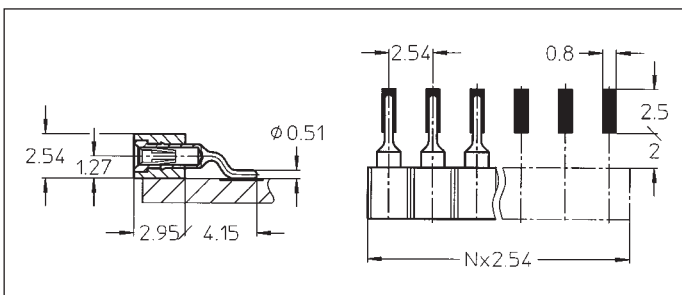

310-91-1xx-41-205
310-93-1xx-41-205
310-97-1xx-41-205
310-99-1xx-41-205

SMD receptacle: single row,
parallel mount

Availability from: 1 to 64 contacts
Standard number of contacts 5,
6, 8, 10, 14, 16, 20, 21, 25, 30,
32, 48, 56, 60, 64