


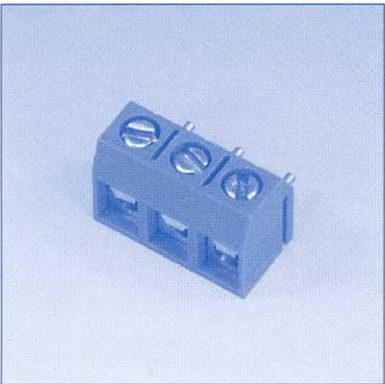

Application and Features:

- Standard sizes are 2 and 3 way-block, but every number of contact can be combined, by simply plugging them together and can be ordered as required.
- With wire guard for wire protection (for that the screw doesn't press directly on the wire)

Technical Data:

Material


- HOUSING: NYLON UL 94 V-0.
- Metal Housing: Brass (Cu Zn) Cu, Tin plated.
- Wire guard: Stainless steel.
- Screw: Steel galvanized and chromated, M2.6

Electrical:

- Current rating: 10 Amps/way max.
- Contact resistance: 20m Ω (Max).
- Insulation resistance: 5000M Ω /1000V.
- Withstanding Voltage: 1500VAC (1min). test time= 60sec/1pcs.
- Operation Voltage: 300 VAC.
- Wire Range: 14-22 AWG.

Mechanical:

- Torque: 4 Kg. cm (Max).
- Operating temperature: -55°C to +105°C
- Solderability: 95 % coverage (min). test temperature= 230°C±10°C. test time= 3sec ± 0.5sec.

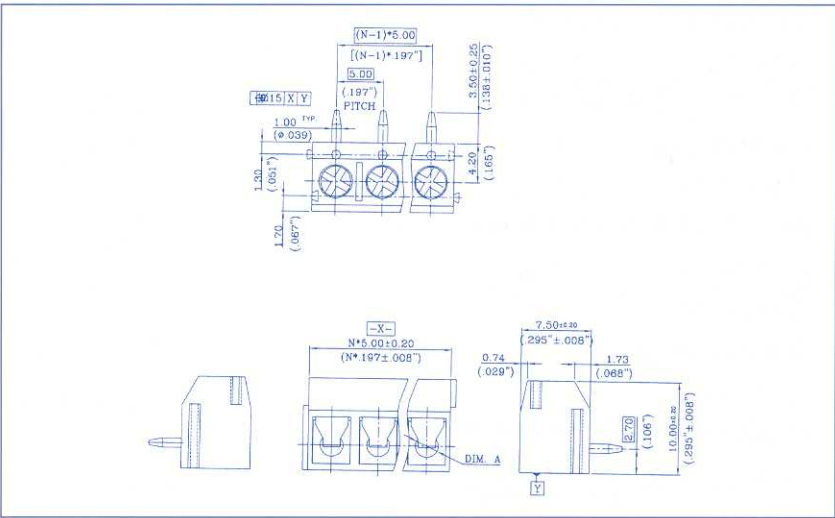

Notes: Please replace 'X' with appropriate coding listed in the tables below

311 - XXX - XX02 - 00X0									
Number of contact		Pitch		Wire Guard		Color		Screw Type	
02-24 po etc.	02	5.00mm/.197"	1	With	0	Black	0	" - "	0
	03	10.00mm/.394"	2	Without	1	Green	5	" + "	1
		5.08mm/.200"	A			Blue	6		
		10.16mm/.400"	B						