


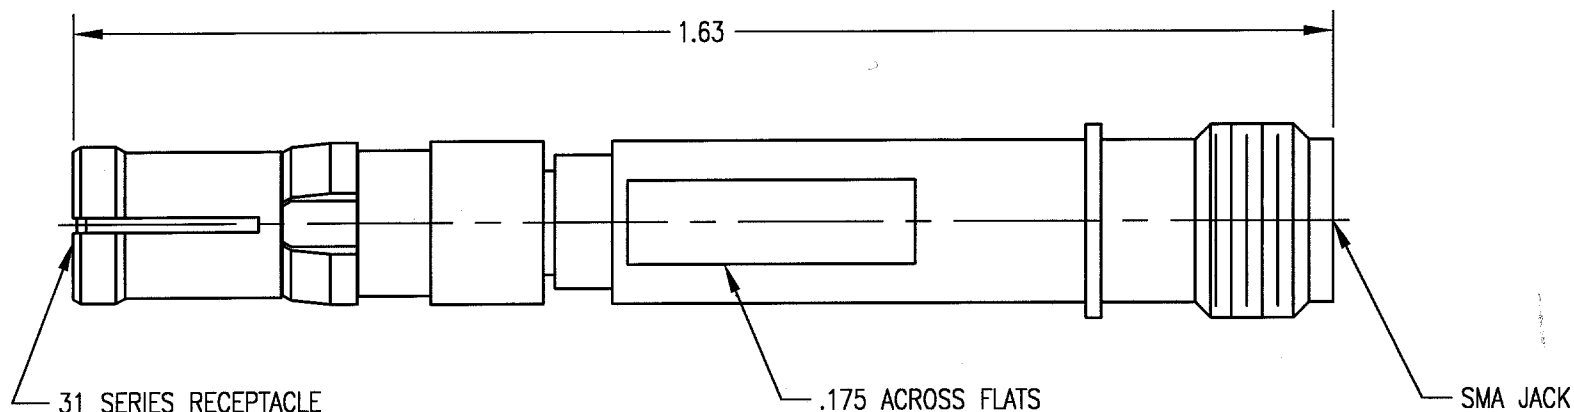

NOTES:

1. MATERIALS:

SMA BODY: BRASS PER ASTM B16
CLIP RING: BERYLLIUM COPPER PER ASTM B194
ALL OTHER METAL PARTS: BERYLLIUM COPPER PER ASTM B196
INSULATOR: TEFLON PER ASTM D1710

2. FINISH:

CLIP RING: .000100 MIN. NICKEL PER QQ-N-290 OVER
COPPER FLASH
ALL OTHER METAL PARTS: .000030 MIN. GOLD PER MIL-G-45204
OVER .000050 MIN. NICKEL PER QQ-N-290

EFFECTIVE FEBRUARY 19, 1999 THIS
DRAWING BECAME THE PROPERTY
OF WINCHESTER ELECTRONICS DIV.
400 PARK RD., WATERTOWN, CT 06795
LITTON SYSTEMS, INCORPORATED.

UNLESS OTHERWISE SPECIFIED
TOLERANCES: 3 PLACE DECIMALS $\pm .005$ 2 PLACE DECIMALS $\pm .010$
FRACTIONS $\pm 1/64$ ANGLE $\pm 2^\circ$
ALL DIMENSIONS PRIOR TO PLATING
CHAMFER 1ST THREAD 45° TO ROOT DIAMETER
REMOVE ALL BURRS AND SHARP EDGES
ALL DIAMETERS TO BE CONCENTRIC WITHIN .003 TIR
SURFACE FINISH SHALL BE 63 MICROINCHES MAXIMUM
DIMENSIONS IN INCHES DO NOT SCALE PRINT

SALES DRAWING



RETCONN

A SUBSIDIARY OF SPM
199 W. PEARL ROAD TORRINGTON, CT. 06790
TEL. (860) 489-1220 FAX (860) 496-7307

TITLE					
31 SERIES RECEPTACLE TO SMA JACK ADAPTER					
DRAWN	KJT	DATE	12/11/97	CHECKED	SCALE
APPR.	KJT	DWG. NO.	311-351-1000G	REV.	B

REV.	DESCRIPTION OF CHANGE	DATE	DRN	APPR
B	RELEASED PER NPR 646	12/11/97	KJT	PP
REVISIONS				