This document was generated on 05/19/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0039036060

Status: Active

Overview: standard_093

Description: 2.36mm (.093") Diameter Standard .093" Pin and Socket Plug Housing With Positive Latch, UL 94V-2, Panel Mount, 6 Circuits



Series image - Reference only

Documents:

3D Model
Drawing (PDF)
Product Specification PS-3191-001 (PDF)
RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
TUV	R72081037
UL	E29179

General

Product Family	Crimp Housings
Series	3191
Comments	Polarized to Mating Part
Overview	standard_093
Product Name	Standard .093"

Physical

Breakaway	No
Circuits (maximum)	6
Circuits Detail	2x3
Color - Resin	Natural
Flammability	94V-2
Gender	Dual
Glow-Wire Compliant	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Nylon
Number of Rows	2
Packaging Type	Bag
Panel Mount	Yes
Pitch - Mating Interface (in)	0.264 In
Pitch - Mating Interface (mm)	6.71 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Electrical

Current - Maximum per Contact	9A

Material Info

Old Part Number	3191-06P

Reference - Drawing Numbers

Packaging Specification	SPK-3191-001
Product Specification	PS-3191-001
Sales Drawing	SD-3191-06P-*

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free Status
Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
3191Series


Mates With
3191 Pin and Socket Recptacle, 5219 Vertical PCB Header


Use With
1189 Crimp Terminals, 1190 Crimp Terminals, 1380 Male Crimp Terminals, 1381 Female Crimp Terminals, 1433 Crimp Terminals, 1434 Male Crimp Terminals, 2605 , 2606 , 1973 , 2151 , 2273 , 2870 , 2871 , 4272 , Lin

This document was generated on 05/19/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

DWG. NO. SD-3191-06P-*

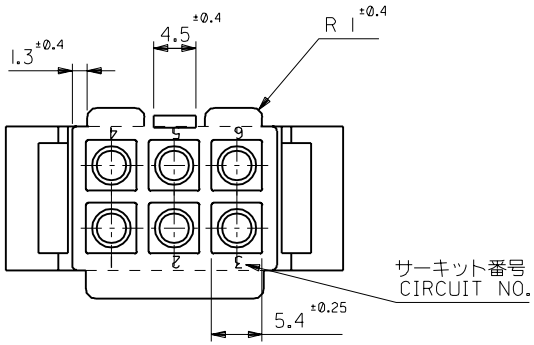


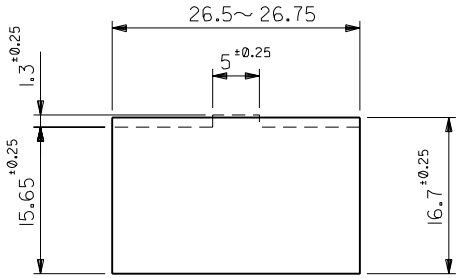

パネル取付穴推奨寸法（厚さ2．0最大）
ハウジングの装着はパネル穴打抜き方向より行うこと
RECOMMENDED PANEL HOLE DIMENSION(THK. 2.0 MAX.)
ATTACH THE HOUSING FROM THE DIRECTION OF
PANEL HOLE PUNCHED OUT.

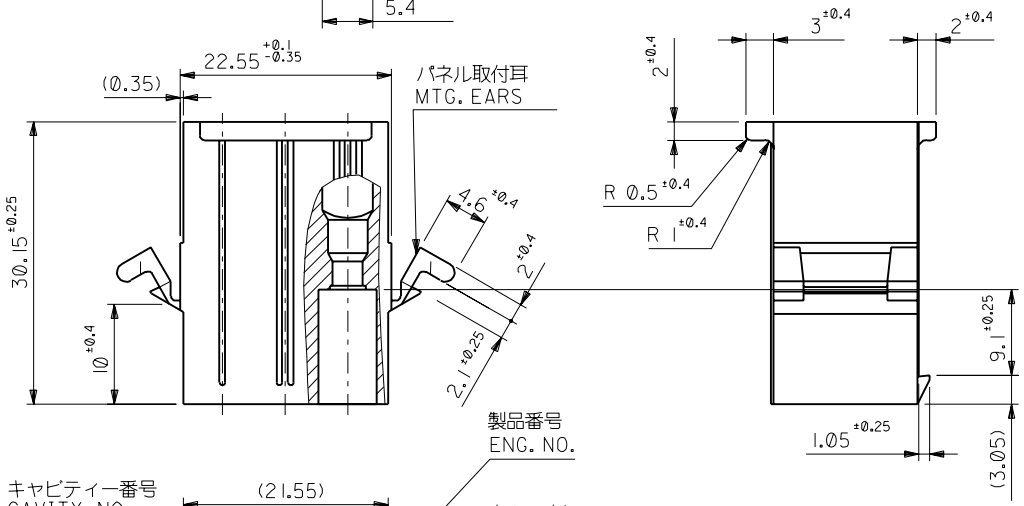

注記
NOTE
（　）内寸法は参考値
DIMENSIONS IN ( ) ARE REFERENCE

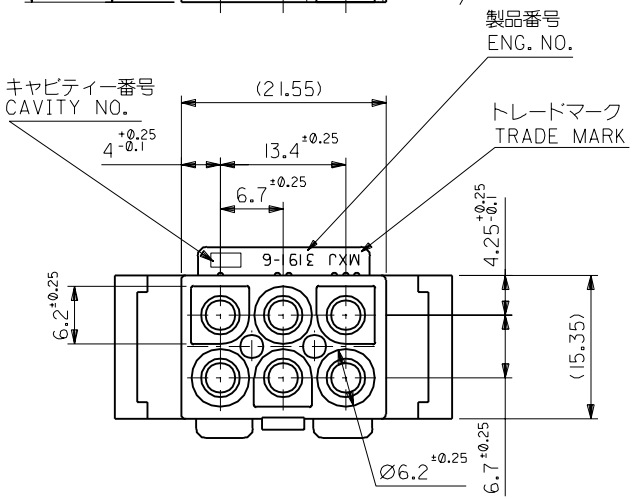

39-03-6061	3191-06P-201	NYLON66	94V-0
39-03-6060	3191-06P	NYLON66	94V-2
EDP. NO.	ENG. NO.	MATERIAL	UL

一般公差 GENERAL TOLERANCES	
角度 ANGLE	±3°
30 以上 OVER	±0.3
10 以上 OVER 30 未満 UNDER	±0.25
10 未満 UNDER	±0.2

記号 LTR	変更内容 REVISION RECORD	DR. CHK.	日付 DATE
J	再作図 REDRAWN (JC70316)	h.i M.F	'96/06/24

材料 MATERIAL 表参照 SEE CHART
仕上げ FINISH
適用電線範囲 WIRE RANGE
被覆外径 INS. RANGE

DRAWN BY '96/06/24 H.IIJIMA
CHK'D BY '96/06/24 M.FUKUSHIMA
APP'D BY '96/06/24 M.ENOMOTO
尺度 SCALE 2 : 1

MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社

REVISE ONLY ON CAD SYSTEM

TITLE 名称
6 CKT. PLUG HS'G. (.093 DIA. TERMINAL)

DWG. NO. SD-3191-06P-*
REV J

3191.S24

:MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス（株）の所有する情報を含むもので当社の許可なく複製を禁止する。

EN-0IC(032)MXJ-32