SOT-23 Formed SMD Package


CMBTA55
CMBTA56

SILICON EPITAXIAL TRANSISTORS


P–N–P transistor

Marking
CMBTA55 = 2H
CMBTA56 = 2G

Pin configuration
1 = BASE
2 = EMITTER
3 = COLLECTOR



PACKAGE OUTLINE DETAILS
ALL DIMENSIONS IN mm

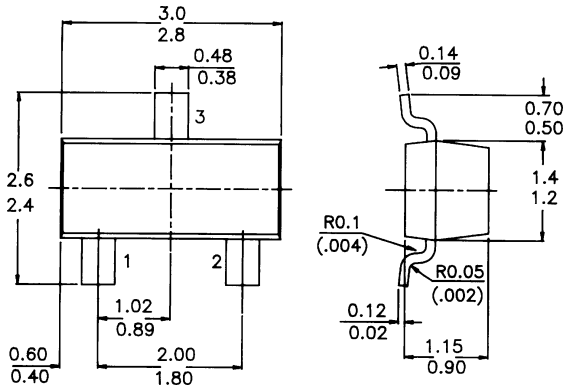

ABSOLUTE MAXIMUM RATINGS

			CMBTA55	*A56*	
Collector–base voltage (open emitter)	$-V_{CBO}$	*max.*	*60*	*80*	*V*
Collector–emitter voltage (open base)	$-V_{CEO}$	*max.*	*60*	*80*	*V*
Emitter–base voltage (open collector)	$-V_{EBO}$	*max.*	*4*	*V*	
Collector current (d.c.)	$-I_C$	*max.*	*500*		*mA*
Total power dissipation up to T_{amb} = 25 °C	P_{tot}		*250*		mW
D.C. current gain					
$-I_C$ = 100 mA; $-V_{CE}$ = 1 V	h_{FE}	*min.*	*100*		
Transition frequency at f = 100 MHz					
$-I_C$ = 100 mA; $-V_{CE}$ = 1 V	f_T	*min.*	*50*		MHz
Collector–emitter saturation voltage					
$-I_C$ = 100 mA; I_B = 10 mA	V_{CEsat}	*max.*	*0.25*		*V*

RATINGS *(at T_A = 25°C unless otherwise specified)*
Limiting values

			CMBTA55	A56	
Collector–base voltage (open emitter)	$-V_{CBO}$	*max.*	*60*	*80*	*V*
Collector–emitter voltage (open base)	$-V_{CEO}$	*max.*	*60*	*80*	*V*
Emitter–base voltage (open collector)	$-V_{EBO}$	*max.*	*4*		*V*
Collector current (d.c.)	$-I_C$	*max.*	*500*		*mA*
Total power dissipation up to T_{amb} = 25 °C	P_{tot}	*max.*	*250*		mW
Storage temperature	T_{stg}		*–55 to +150*		*° C*
Junction temperature	T_j	*max.*	*150*		*° C*

THERMAL CHARACTERISTICS
$T_j = P\ (R_{th\ j–t} + R_{th\ t–s} + R_{th\ s–a}) + T_{amb}$
Thermal resistance

from junction to ambient	$R_{th\ j–a}$		*500*	K/W

CHARACTERISTICS *(at T_A = 25°C unless otherwise specified)*

			CMBTA55	A56	
Collector–emitter breakdown voltage					
$-I_C$ = 1 mA; I_B = 0	$-V_{(BR)CEO}$	*min.*	*60*	*80*	*V*
Emitter–base breakdown voltage					
$-I_C$ = 0; I_E = 100 µA	$-V_{(BR)EBO}$	*min.*	*4*		*V*
Collector cut–off current					
$-V_{CE}$ = 60 V; I_B = 0	$-I_{CEO}$	*max.*	*0.1*		*µA*
$-V_{CB}$ = 60 V; I_E = 0	$-I_{CBO}$	*max.*	*0.1*	-	*µA*
$-V_{CB}$ = 80 V; I_E = 0	$-I_{CBO}$	*max.*		*0.1*	*µA*
Saturation voltages					
$-I_C$ = 100 mA; $-I_B$ = 10 mA	$-V_{CEsat}$	*max.*	*0.25*		*V*
Base–emitter On voltage					
$-I_C$ = 100 mA; $-V_{CE}$ = 1 V	$-V_{BE(on)}$	*max.*	*1.2*		*V*
D.C. current gain					
$-I_C$ = 10 mA; $-V_{CE}$ = 1 V	h_{FE}	*min.*	*100*		
$-I_C$ = 100 mA; $-V_{CE}$ = 1 V	h_{FE}	*min.*	*100*		
Transition frequency at f = 100 MHz					
$-I_C$ = 100 mA; $-V_{CE}$ = 1 V	f_T	*min.*	*50*		MHz

Customer Notes

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished on the CDIL Web Site/ CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.

CDIL is a registered Trademark of
Continental Device India Limited
C-120 Naraina Industrial Area, New Delhi 110 028, India.
Telephone + 91-11-2579 6150, 5141 1112 Fax + 91-11-2579 5290, 5141 1119
email@cdil.com www.cdilsemi.com