
Pomona®

Model 3230
Size B Aluminum Box With Cover
BNC Female/Female

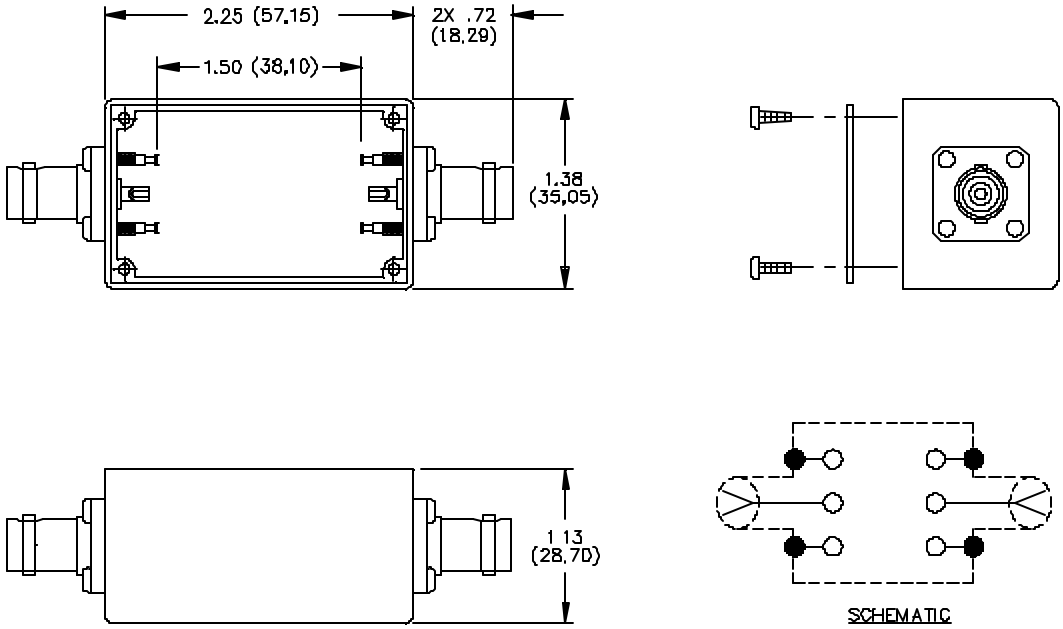

MATERIALS:

Connector: BNC (F)
Body: Tarnish Resistant Plating, Gold Plated Beryllium Copper,
Solder Turret Terminal Screws: Steel
Shielded Housing: Die cast aluminum alloy A380 or A384.
Finish: Blue paint per Federal Standard 595 #25109 over Phosphoric Etch
Cover: .040 thick aluminum 1100-H14
Finish: Clear anodized
Screws: 4 each #2-32 x ¼" Pan Head self-tapping. Steel.

RATINGS:

Operating Voltage: Inner conductor/Shield: 500 VRMS Max.
Operating Temperature: -55ºC to +150ºC
Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 3230

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

Pomona*ACCESS* **90165** (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com