


1		2	3	4	5	6	7
E		D		C		B	
版次 REV		更改单号 Revise No		制图绘图 DESCRIPTION		日期 Date	
A							
B							
C							



深圳市首韩科技有限公司		名称	Denomination:	轻触开关	
		型号	Part no.:	TACT SWITCH	
未注公差	General tolerance	设计	Design:	TS6611B3JTP 250gf 022	
X.	±0.20	X° .	±1°	单位	mm
X.	±0.15	X° .	±0.5°	幅	DIN
X.	±0.05	XX° .	±0.1°	页码	Sheet of
.XX	±0.05	XX° .	±0.1°	版次	REV
1	按钮	备 注	XXX° ± .XXX° ±	批准	罗孝金
序号	名称	数量	材料	镀层/颜色	A/O
1		2		3	6
				4	7

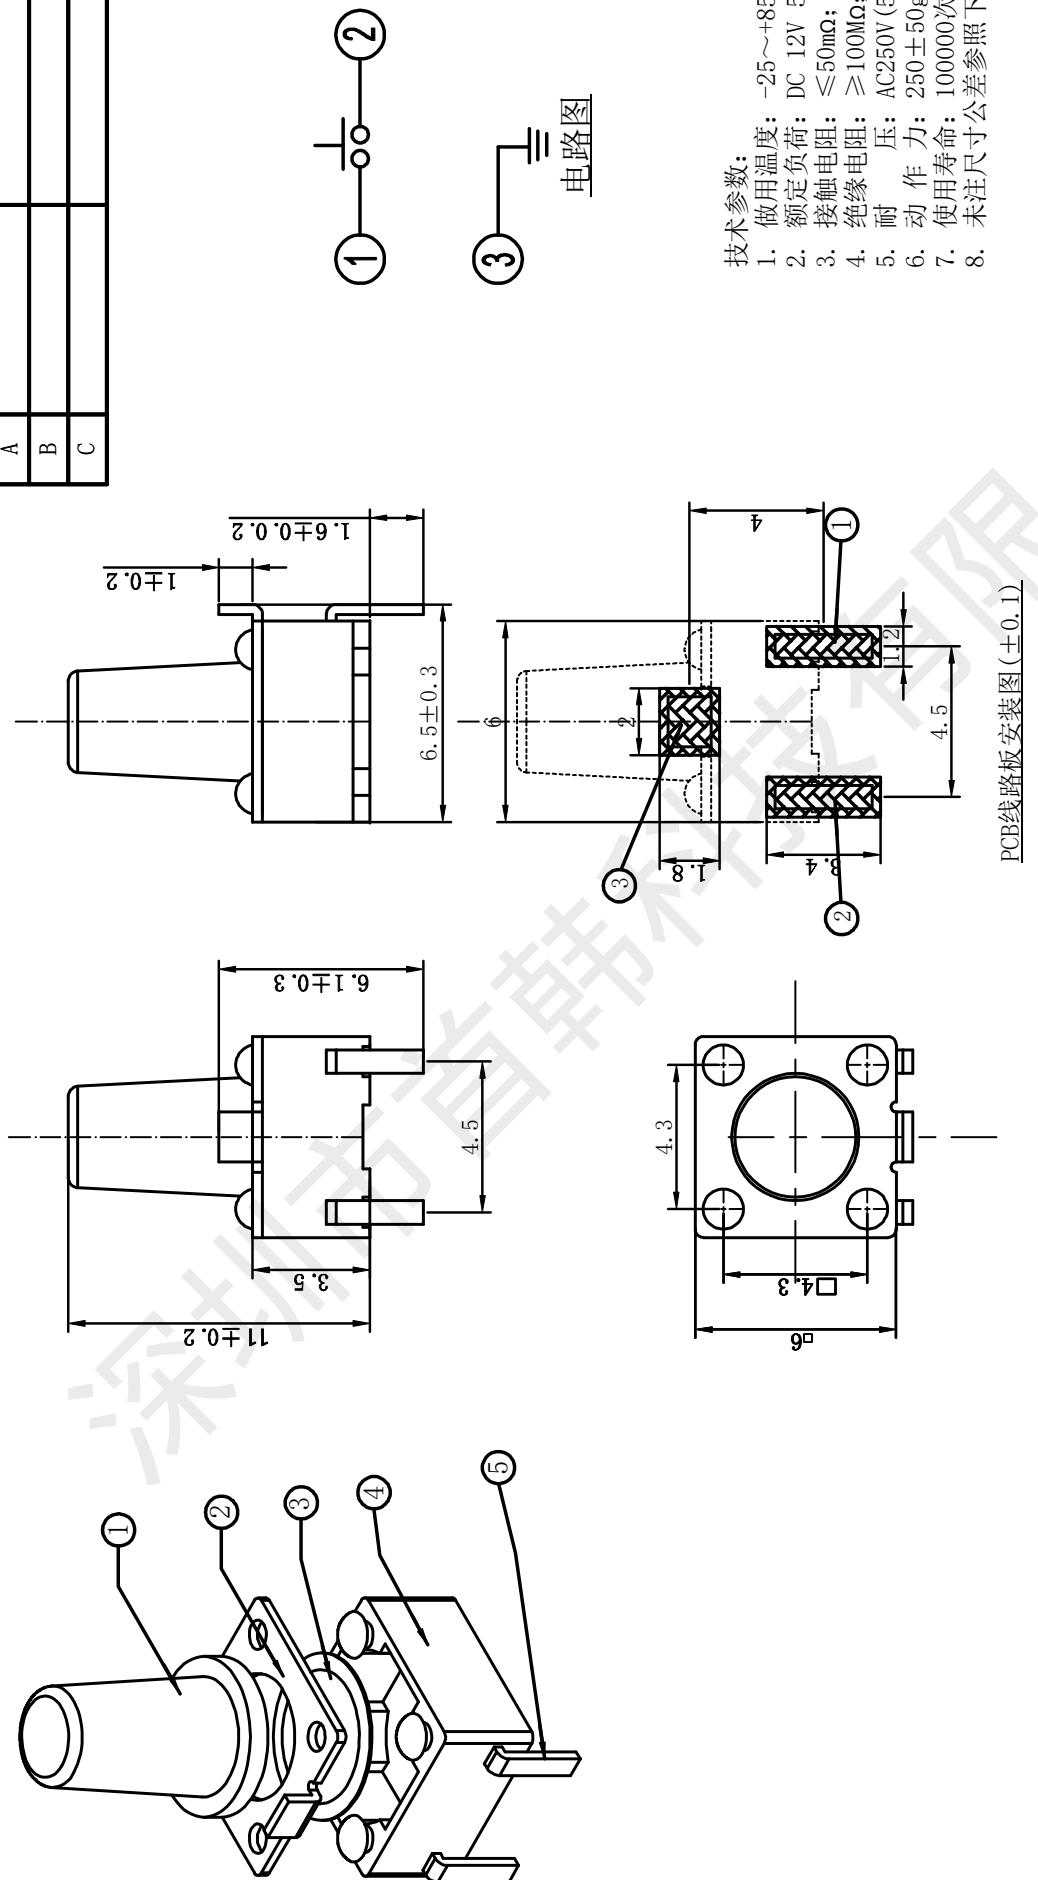

深圳市首韩科技有限公司

SHENZHEN SHOUHAN TECHNOLOGY CO., LTD

Tel: 0755-27597601 Fax: 0755-27597491

承 认 书

SPECIFICATION FOR APPROVAL

客 户 Customer:

产品名称 Project:

轻触开关

规格型号 Part No:

TS6611B3JTP 250gf 022

贵公司承认印 Approal signatures

料 号/Part No.	签 章/Signatures

日期 Date:

拟制/Drawn	李春风	
审核/Check	钟华华	
批准/Approved	罗孝金	



产品规格书

PRODUCT SPECIFICATION

SIRLES		系列:FLIP SWITCHES(轻触开关)	
MODEL		型号: TS6611B3JTP	
1.RATING		额定值:50mA 12V DC	
2.CONSTRUTION DIMENSION 结构尺寸		Apply to the appended drawing:符合附加图纸	
3.APPEARANCE 外观		Have no remarkable damage,crack and rust etc:无明显损伤,裂纹,锈迹等.	
4.CONTACTLOOP 接触回路		Monople loop:单通单极回路	
ITEM 专案	TEST CONDITION 测试条件	SPECIFICATION 规格	
5.CAPABILITY OF ELECTRIC 电气性能			
5A 绝缘电阻	INSULATION RESISTANCE Measurements shall be made following Application of DC500V potential across terminals and across terminals and frame for 1minute,在端子之间和端子与壳之间加 DC500V 条件下,持续 1 分钟测量.	100MΩ min 100 兆欧以上.	
5B 耐电压	WITHSTAND VILTAGE AC250V、50HZ、1 min (immin(interrupting current≤500uA). AC250V、50HZ、1 分钟(漏电流 500uA)	There shall be no breakdown 无击穿现象出现。	
5C 接触电路	CONTACT CIRCUIT Addition 1.5-2 time force on the top of the keystrok and press the switch,DC50V100mA 在按键顶端上等于作用力 1.5-2 倍的力按动开关,DC50V,10Ma.	50mΩ Max (50mΩ 以下)	
5D 开关接触点抖动	SWITCH CONNECTION FLASH Addition DC5V on the two side of switch,at a speed of 3-5time a sec.to press the switch.在开关的两端加 DC5V 的电压,以 3-5 次/秒的速度按动开关.	The flash time between open not more than 10ms. 开关在接通和断开时的接点抖动时间不大于 10 ms.	
6.MECHANICAL EFFICIENCY 机械性能			
6A 按键强度	CONTACT STRENGTH The contact shall be capable of a force of 5N for 5 seconds in any directions.沿开关动作方向可承受静能压力 5N, 保持 5 秒钟.	Switch electric andmechanical efficiency does not break 无损开关电气或者机械性能	
6B	CONTACT JOURNEY		按键行程 0.25±0.1
6C 驱动力	DRIVE FORCE Being measure at across spring piece and across keystoke forergometer.用测力计在按键与弹片之间测量.	按键的开关驱动力为: 250±50gf	

6D	CONNECTION STRENGTH 接线端强度	A force of 1N being applying in any directions of the switch connection part.. 在接线端的作用方向施加 1N 的力.	Switch mechanical efficiency does not break. 无损开关机械性能.
6E	MECHANICAL LIFE 机械寿命	Operatin at a rate of 30-50 cycles a minute. 以 30-50 次/分的驱动速度操作.	Life:100000cycles 寿命:100000 次

7. ENVIRONMENT----RESISTANT EFFICIENCY 耐环境性能

7A	CHANGE OF TEMPERATURE 温度变化	The first temperature shall be 70 °C , 3h and changed to -25°C, 0.5h, 5cycles of above test. 先 70°C, 3h, 然后 -25°C, 0.5h, 如此重复 5 次.	1. The appearance should not break. 外观应无损伤. 2. Contact resistance $\leq 100 \text{ M } \Omega$ 接触电阻 $\leq 100 \text{ M } \Omega$ 3. Insulation resistance $\geq 100 \text{ M } \Omega$ 绝缘电阻 $\geq 100 \text{ M } \Omega$
7B	HUMIDITY RESISTANT 耐湿热	40±2°C in temperature and 90~95%RH, During the test time without load; After testing the temperature should be 24h. 经 40±2°C, 相对湿度 90~95%, 试验期间, 开关不动作, 不带电负荷, 试验后恢复到常温 24h.	

8. JOINTING EFFICIENCY 焊接性能

8A	SOLDERABILITY 可焊性	Temperature 240±5°C ; Duration: 3±0.5S: 温度在 240±5°C, 持续 3±0.5S.	Solderability part should above 90% 可焊部分被焊料覆盖面应在 90% 以上.
8B	SOLDER—RESISTANT 耐焊剂性	Warm-up temperature: 100°C, 40S, 焊锡温度 230±5°C, 浸焊时间 5±0.5S.	Froth height of assist solder should under board and switch electric and mechanical efficiency does not break. 助焊剂发泡不应超过印制板, 无损伤开关电气或机械动作性能.
8C	JOINTING—RESISTANT 耐焊接热	Jointing temperature: 240±5°C, Duration of immersion: 5±1S. 焊锡温度 240±5°C, 浸焊时间 5±1S	efficiency does not break 无损伤开关电气或机械动作性能.
8D	NORMAL JOINTING TIMES 正常焊接次数		$\leq 2\text{times}$ 小于 2 次

9. NOTES

9A	The whole boxes of switch should keep in the temperature -30--80 °C and less than 80%RH without acidic, alkalescence, caustic gas in the environment of the storage. 整箱包装的开关, 应在温度为-30--80°C, 相对湿度不大于 80%, 周围的空气中没有酸性、碱性或其他腐蚀性气体的库房内保管。
9B	Operating Temperature Range:-25 to 85 °C 操作温度的范围: -25 to 85 °C
9C	Switch should install in a correct method. 开关应按正确的安装方法进行正确安装使用。