
Pomona®

Model 3267
Standard Uninsulated – Banana Jack

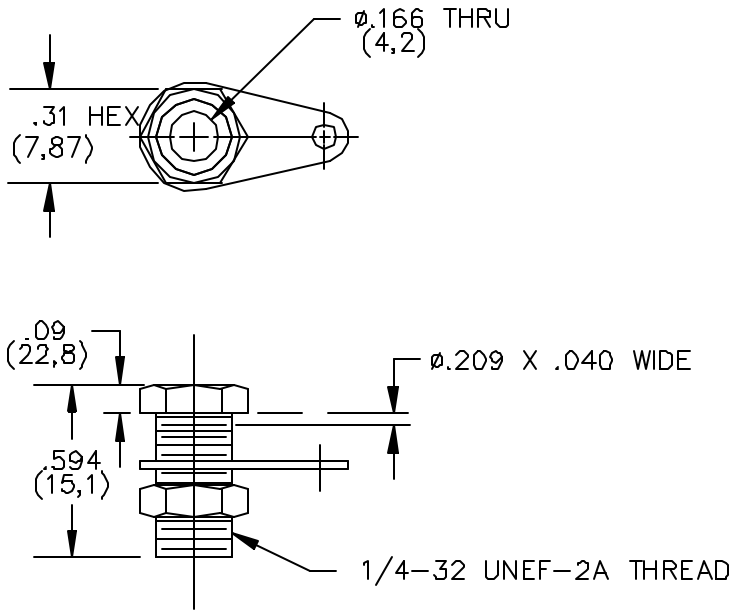

FEATURES:

- Fits standard banana plug.
- ¼ - 32 Thread

MATERIAL:

Banana Jack Body – Nickel Plated Brass
Solder Lug – Copper, finish – Hot tin dip
Hex Nut – Brass - 6.35 (.250) –23 Double Chamfered, Nickel Plated

RATING:

Operating Voltage: Hand-held testing: 30VAC/60VDC Max.
Hands free testing in controlled voltage environments: 2500 WVDC Max.
Current: 15 Amperes Cont.

ORDERING INFORMATION: Model 3267

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060