

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0330113001

Status:

Active

Overview:

mx150_sealed_connector_system

Description:

MX150™ Male Terminal, Silver (Ag) Plating, 22 AWG, Left Reel Payoff, Contact Material Thickness 0.30mm (.012")



Series

image - Reference only

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family

Series

Comments

Crimp Quality Equipment

Overview

Product Name

Crimp Terminals

33011

Left Reel Payoff

Yes

mx150_sealed_connector_system

MX150™

Physical

Gender

Material - Metal

Material - Plating Mating

Material - Plating Termination

Packaging Type

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

Plating min: Termination (µm)

Termination Interface: Style

Wire Insulation Diameter

Wire Size AWG

Wire Size mm²

Male

High Performance Alloy (HPA)

Silver

Tin

Reel

30.4

0.76

100

2.5

Crimp or Compression

2.60mm (.102") max.

22

0.35, 0.50

Electrical

Current - Maximum per Contact

Voltage - Maximum

22A

250V

Material Info

Reference - Drawing Numbers

Sales Drawing

SD-33000-001

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

33011Series

Use With

33482 Dual Row Housing, 33481 Single Row Housing, 33486 Hybrid Housing

Application Tooling | FAQ



Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Hand Crimp Tool, 18-22AWG	0638112600
FineAdjust™ Applicator	0639000600

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

13 12 11 10 9 8 7 6 5 4 3 2 1

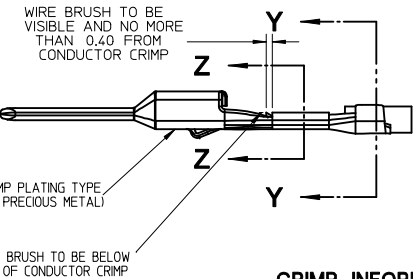

PLATING NOTES:

1. PRECIOUS METAL PLATED TERMINAL:

1.1 GOLD PLATING:

ZONE A: SHALL BE COMPLETELY COVERED WITH NICKEL TO PREVENT EXPOSED BASE METAL
REDUCED GOLD THICKNESS FROM ZONE B PERMITTED

ZONE B: PRECIOUS METAL PLATING PER MOLEX PLATING SPECIFICATION ES-88

BASE LAYER: ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
THICKNESS: 1.25 - 2.25 MICROMETERS

GOLD LAYER: ELECTRODEPOSITED GOLD
THICKNESS: 0.76 MICROMETERS MINIMUM

ZONE C: SHALL BE COMPLETELY COVERED WITH NICKEL TO PREVENT EXPOSED BASE METAL
REDUCED PLATING THICKNESS FROM ZONE B AND ZONE D PERMITTED

ZONE D: TIN PLATING PER MOLEX PLATING SPECIFICATION ES-88

BASE LAYER: ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
THICKNESS: 1.25 - 2.25 MICROMETERS

TIN LAYER: ELECTRODEPOSITED 100% TIN, MATTE FINISH
THICKNESS: 2.5 - 4.0 MICROMETERS

ZONE E: SHALL BE COMPLETELY COVERED WITH NICKEL TO PREVENT EXPOSED BASE METAL
REDUCED THICKNESS FROM ZONE D PERMITTED

1.2 SILVER PLATING:

ZONE A: SHALL BE COMPLETELY COVERED WITH NICKEL TO PREVENT EXPOSED BASE METAL
REDUCED SILVER THICKNESS FROM ZONE B PERMITTED

ZONE B: SILVER PLATING

BASE LAYER: ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
THICKNESS: 1.25 - 2.25 MICROMETERS

SILVER LAYER: ELECTRODEPOSITED PURE SILVER (0.5% MAX IMPURITIES)
THICKNESS: 19 - 3.3 MICROMETERS
FINISH: SEMI BRIGHT

ANTI-TARNISH: TREATMENT FOR SILVER PLATED TERMINAL - EVABRITE WS

ZONE C: SHALL BE COMPLETELY COVERED WITH NICKEL TO PREVENT EXPOSED BASE METAL
REDUCED PLATING THICKNESS FROM ZONE B AND ZONE D PERMITTED

ZONE D: TIN PLATING PER MOLEX PLATING SPECIFICATION ES-88

BASE LAYER: ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
THICKNESS 1.25 - 2.25 MICROMETERS







TIN LAYER: ELECTRODEPOSITED 100% TIN, MATTE FINISH
THICKNESS 2.5 - 4.0 MICROMETERS

ZONE E: SHALL BE COMPLETELY COVERED WITH NICKEL TO PREVENT EXPOSED BASE METAL
REDUCED THICKNESS FROM ZONE D PERMITTED

2. TIN PLATED TERMINAL (ENTIRE TERMINAL)

BASE LAYER: ELECTRODEPOSITED ADVANCED TIN BARRIER
THICKNESS 0.25 - 1.00 MICROMETERS

TIN LAYER: ELECTRODEPOSITED REFLOW TIN, 100% TIN, NO BRIGHTENERS
THICKNESS 0.50 - 1.00 MICROMETERS

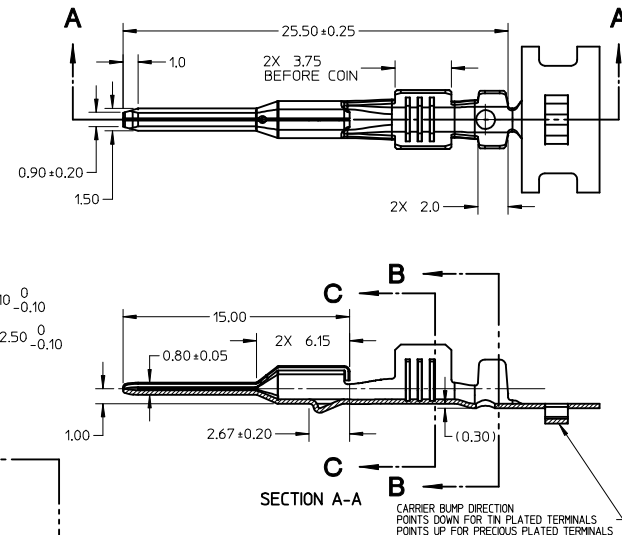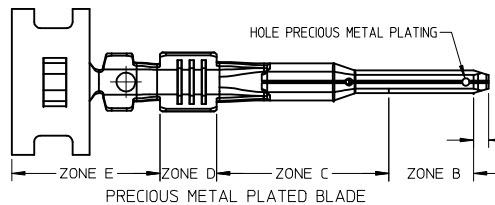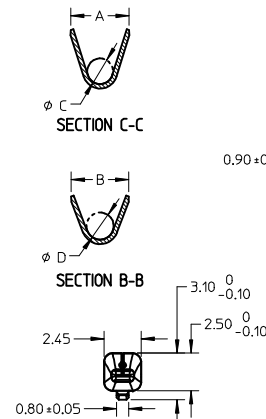


GENERAL NOTES: (UNLESS OTHERWISE SPECIFIED)


- MATING TERMINAL SHOWN ON SD-33012-002
- MATERIAL: ASTM B422, UNS C19025, HR04
THICKNESS: 0.30 mm +0.01
TEMPER: FULL HARD (REF)
TENSILE: 496-572 MPA
PLATING: SEE PLATING NOTES
- MEETS CRIMP PERFORMANCE SPECIFICATION SAE/USCAR-21 (RELEASED: 08/25/01)
- MEETS PERFORMANCE STANDARD FOR AUTOMOTIVE ELECTRICAL CONNECTOR SYSTEMS SAE/USCAR-2 REV 3 (APRIL 2001)
- MEETS FIELD CORRELATED LIFE TEST SAE/USCAR-20 (NOVEMBER 2001)
- MEETS WIRING COMPONENT DESIGN GUIDELINES SAE/USCAR-12 REV 2 (DECEMBER 2001)
- MEETS ELECTRICAL CONNECTION SYSTEM DESIGN SPECIFICATION (SDS) REV 11 (5/2002)
- REFERENCE PK-31300-516 FOR REEL DIRECTION
- REFERENCE CS-33000-001 FOR ADDITIONAL CRIMP INFORMATION

ENTER DESCRIPTION EC NO: UAU2010-0107 DRAWN:FERGUSON CHKD:A.DHIR APPR:B.MOSER	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY	DATE	TITLE MX150 15MM BLADE TERMINAL	
			4 PLACES	± ---	± ---	L.PULLIAM	2006/01/31		
			3 PLACES	± ---	± ---	CHECKED BY	DATE		
			2 PLACES	± 0.1	± ---	A.DHIR	2006/02/01		
			1 PLACE	± 0.3	± ---	APPROVED BY	DATE	MOLEX MOLEX INCORPORATED	
			ANGULAR ± 3 °			B.MOSER	2006/02/02		
			MATERIAL NO.			DOCUMENT NO.			SHEET NO.
			SEE TABLE			SD-33000-001		1 OF 5	
C10	REV		SIZE			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

**CRIMP TOOL INFORMATION
EXCEPT 14 GA**

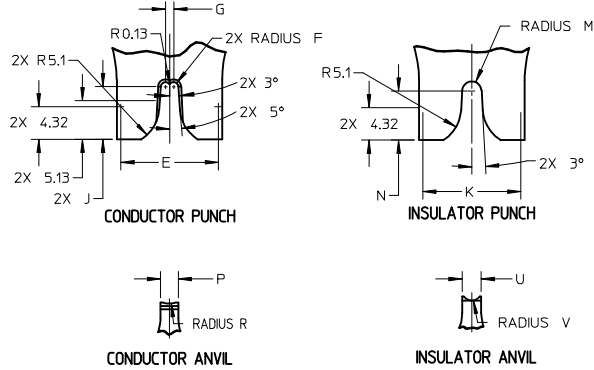


14 GA CRIMP TOOLING

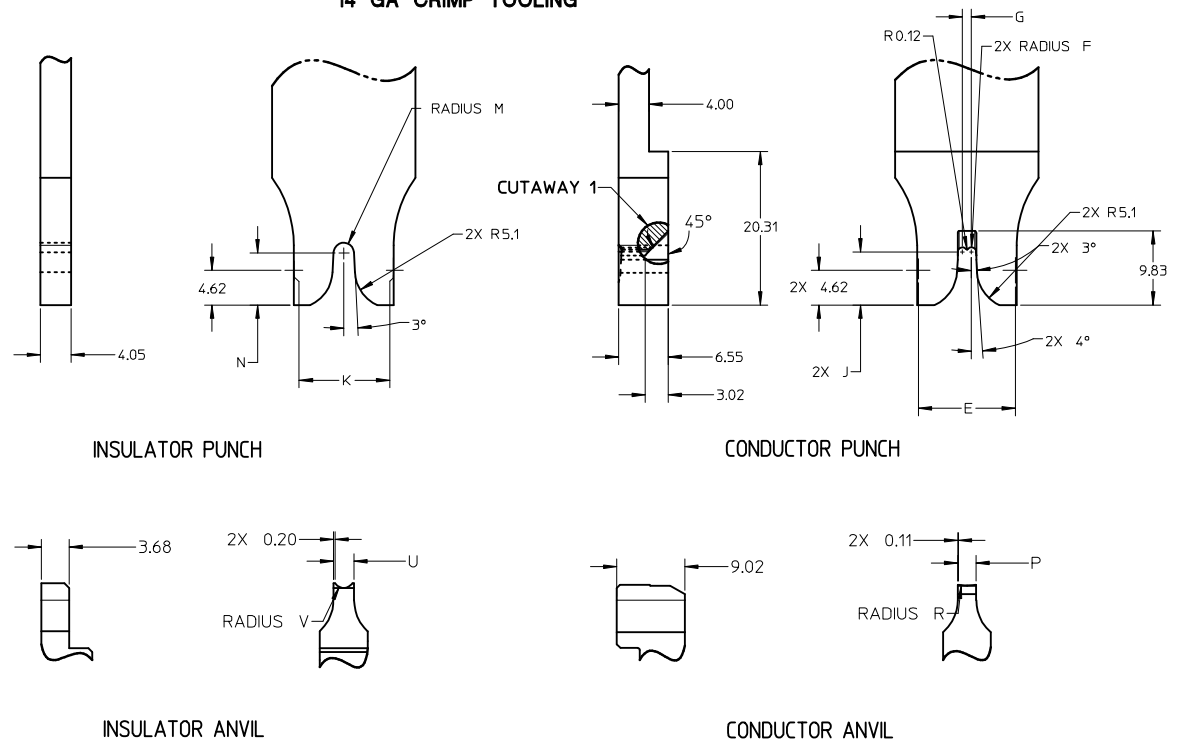


ENTER DESCRIPTION EC NO: UAU2010-0107 2009/08/18 DRWN:KFERGUSON 2009/08/19 CHKD:A.DHIR 2009/08/20 APPR:BMOSER	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	TITLE MX150 1.5MM BLADE TERMINAL MOLEX INCORPORATED DOCUMENT NO. SD-33000-001 SHEET NO. 3 OF 5
				mm	INCH	DRAWN BY L.PULLIAM	DATE 2006/01/31			
			4 PLACES	± ---	± ---	CHECKED BY A.DHIR	DATE 2006/02/01			
			3 PLACES	± ---	± ---	APPROVED BY B.MOSER	DATE 2006/02/02			
			2 PLACES	± 0.1	± ---	MATERIAL NO. SEE TABLE				
			1 PLACE	± 0.3	± ---					
			ANGULAR ± 3 °							
						SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

13 12 11 10 9 8 7 6 5 4 3 2 1



J
I
H
G
F
E
D
C
B
A

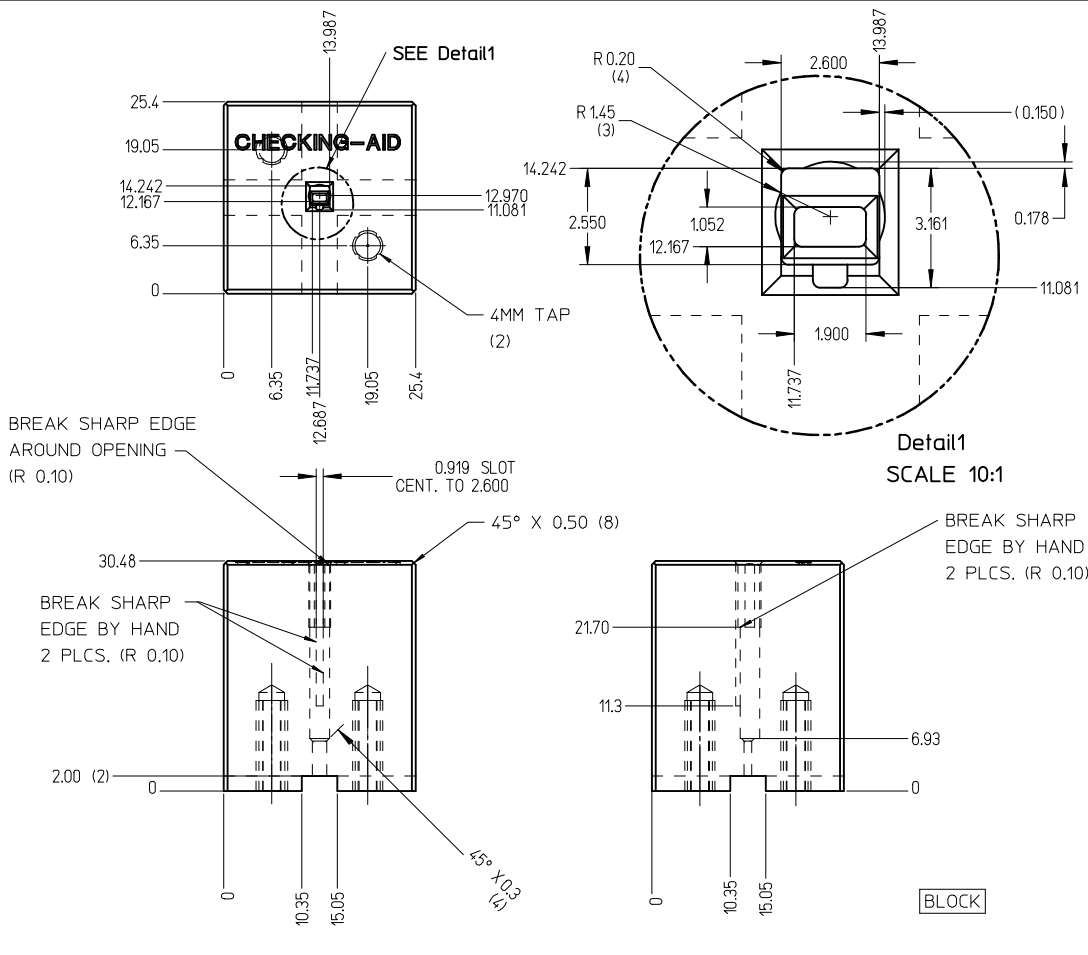

CHECKING-AID
2 PIECE ASM. A2 TOOL STEEL
HARDEN & GRIND TO A ROCKWELL
HARDNESS "C" SCALE OF 56-58



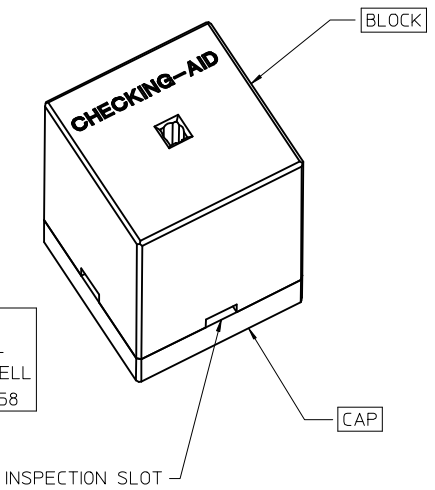


CHECKING AID TOLERANCE	
.XXX	= .005
.XX	= .03
.X	= .3

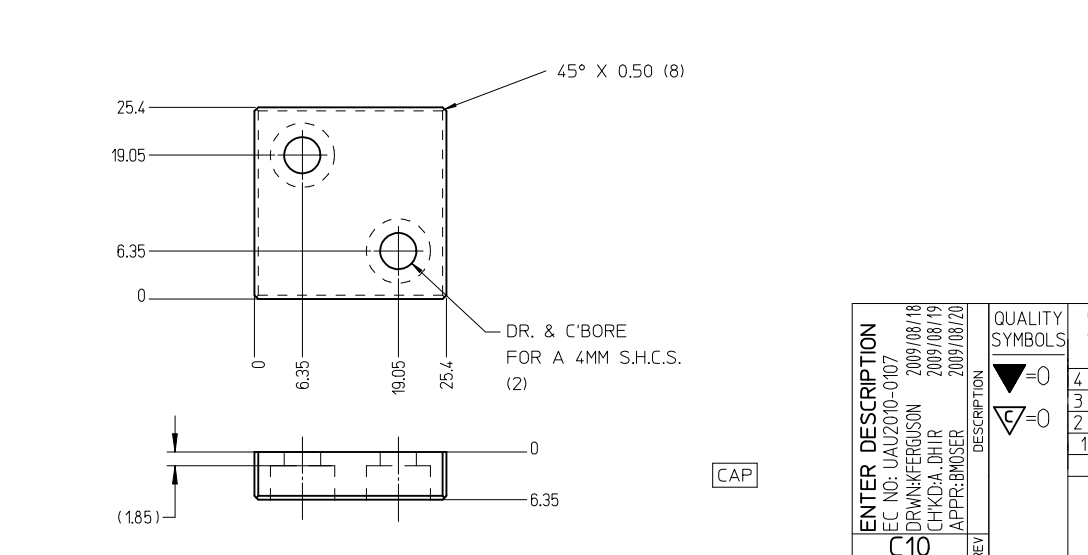



- CRIMP REQUIREMENTS:
1. CRIMP STRAIGHTNESS MUST BE MAINTAINED. USE A KNOCKDOWN TOOL LOCATED AS SHOWN. TERMINAL BOX MUST NOT BE DEFORMED
 2. AFTER CRIMPING, THE TERMINAL AND WIRE MUST FIT FREELY INTO THE CHECKING AID 33000-700. PROPER INSERTION DEPTH IS MET WHEN BLADE TIP STOPS ON CAP. SLOTS PROVIDED TO VISUALLY INSPECT STOPPAGE OF PIN TIP.
 3. FOR OTHER MECHANICAL REQUIREMENTS ON CRIMPED TERMINALS, REFER TO SAE/USCAR-21 (5-13-02) SECTIONS 4.2 (VISUAL INSPECTION), 4.3 (CROSS SECTION ANALYSIS) AND 4.4 (CONDUCTOR CRIMP PULLOUT FORCE)

ENTER DESCRIPTION EC NO: UAU2010-0107 DRWN:KFERGUSON 2009/08/18 CHKD:A.DHIR 2009/08/19 APPR:BMOSER 2009/08/20 C10		DESCRIPTION QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY L.PULLIAM	DATE 2006/01/31	TITLE MX150 15MM BLADE TERMINAL				
			4 PLACES	± ---	± ---	CHECKED BY A.DHIR	DATE 2006/02/01					
			3 PLACES	± ---	± ---	APPROVED BY B.MOSER	DATE 2006/02/02					
			2 PLACES	± 0.1	± ---	MOLEX MOLEX INCORPORATED						
			1 PLACE	± 0.3	± ---			MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-33000-001	SHEET NO. 4 OF 5		
			ANGULAR ± 3 °									
REV			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

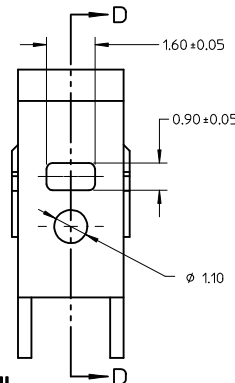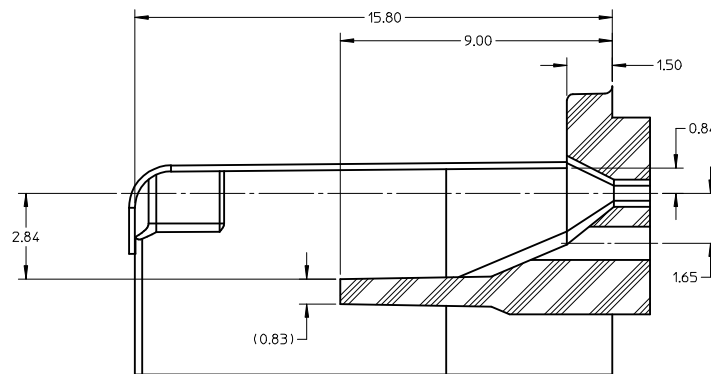



SECTION D-D

TPA/INSERT DETAIL

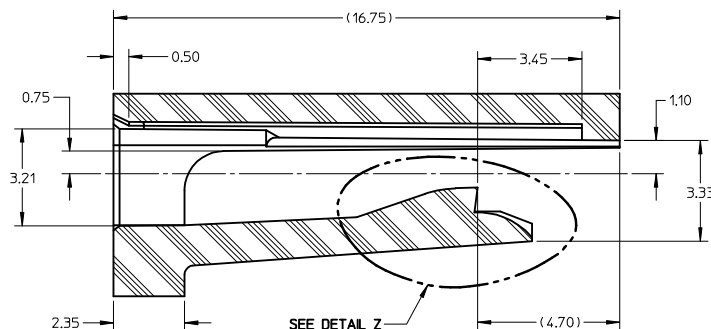



SECTION E-E

HOUSING DETAIL

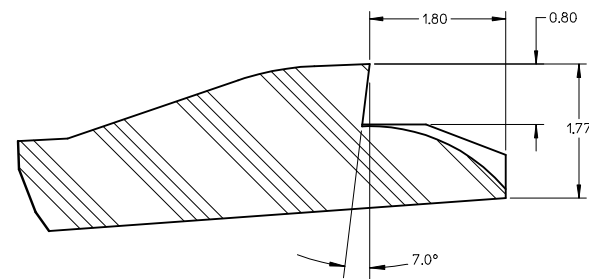


DETAIL Z
SCALE 20:1

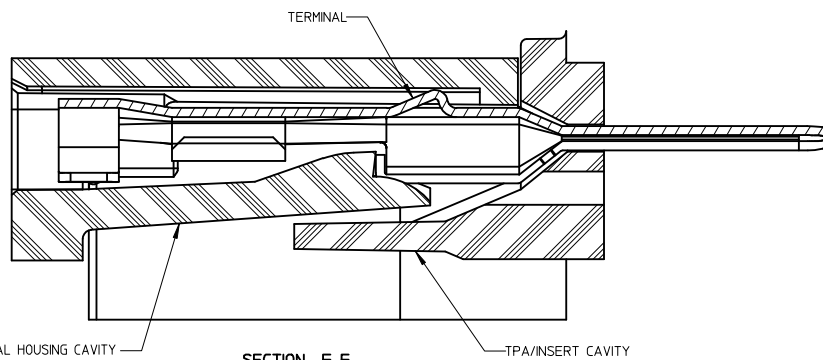

SECTION F-F

BLADE CAVITY ASSEMBLY VIEWS

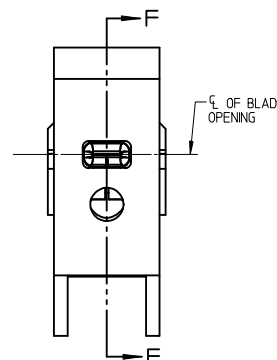

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. TOLERANCES: LINEAR ± 0.10
ANGULAR 3°
2. ALL DRAFT WITHIN TOLERANCE
3. MAX RADII ON ALL CORNERS SHOWN SHARP: 0.10
4. MAX FLASH PERMISSIBLE: 0.1
5. EJECTOR PIN MARKS PERMISSIBLE IF FLUSH TO 0.25 BELOW SURFACE
6. MATERIAL: HOUSING/FINGER SPECIFICATION ENGINEERED FOR MATERIAL WITH THE FOLLOWING PROPERTIES:
A. FLEXURAL MODULUS = 4,500 TO 9,400 MPa
PER ASTM TEST D790
B. ELONGATION AT YIELD = 2.3% OR BETTER
PER ASTM TEST D638 TYPE V
7. CAVITY SPEC FOR USE ONLY WITH MOLEX BLADE TERMINAL PART NUMBERS (EXCEPT P/N'S FOR UNSEALED APPLICATIONS) SPECIFIED ELSEWHERE ON THIS DRAWING

ENTER DESCRIPTION
EC NO: UAU2010-0107
DRAWN: KFERGUSON 2009/08/18
CHKD: A.DHIR 2009/08/19
APPR: B.MOSER 2009/08/20
REV

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± 0.1	± 0.004
3 PLACES ± 0.1	± 0.004
2 PLACES ± 0.1	± 0.004
1 PLACE ± 0.3	± 0.012
ANGULAR $\pm 3^\circ$	

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
L.PULLIAM	2006/01/31
CHECKED BY	DATE
A.DHIR	2006/02/01
APPROVED BY	DATE
B.MOSER	2006/02/02
MATERIAL NO. SEE TABLE	
SIZE C	

SCALE 8:1	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION
TITLE MX150 15MM BLADE TERMINAL			
MOLEX INCORPORATED			
DOCUMENT NO. SD-33000-001			SHEET NO. 5 OF 5
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			