# **High-density Signal Conditioners 10-RACK**

# **CT TRANSMITTER**


(RMS sensing)

#### **Functions & Features**

- Converting an alternating current from a current transformer into two standard process signals
- Minimum ripple
- Optional second channel output available at the front terminals and at the Standard Rack connector

#### Typical Applications

- Centralized monitoring and control of motors, pumps or heaters by DCS
- · Monitoring power line and power supply current



MODEL: 10CE-[1][2][3]-R[4]

### **ORDERING INFORMATION**

• Code number: 10CE-[1][2][3]-R[4] Specify a code from below for each [1] through [4]. (e.g. 10CE-1A6-R/Q)

 Specify the specification for option code /Q (e.g. /C01)

# [1] INPUT

#### Current

1: 0 - 1 A AC

**5**: 0 - 5 A AC

# [2] **OUTPUT** 1

# Current

**A**: 4 - 20 mA DC (Load resistance 600  $\Omega$  max.)

**B**: 2 – 10 mA DC (Load resistance 1200  $\Omega$  max.)

 $C: 1 - 5 \text{ mA DC (Load resistance 2400 } \Omega \text{ max.)}$ 

**D**: 0 - 20 mA DC (Load resistance 600  $\Omega$  max.)

**E**: 0 - 16 mA DC (Load resistance 750  $\Omega$  max.)

**F**: 0 - 10 mA DC (Load resistance 1200  $\Omega$  max.)

**G**: 0 - 1 mA DC (Load resistance 12 k $\Omega$  max.)

#### Voltage

1: 0 - 10 mV DC (Load resistance 10 k $\Omega$  min.)

**2**: 0 – 100 mV DC (Load resistance 100 k $\Omega$  min.)

**3**:  $0 - 1 \text{ V DC (Load resistance } 100 \Omega \text{ min.)}$ 

**4**: 0 - 10 V DC (Load resistance 1000  $\Omega$  min.)

**5**:  $0 - 5 \text{ V DC (Load resistance } 500 \Omega \text{ min.)}$ 

**6**: 1 – 5 V DC (Load resistance 500  $\Omega$  min.)

# [3] **OUTPUT** 2

0: None

#### **Voltage**

**6**: 1 – 5 V DC (Load resistance 5000  $\Omega$  min.)

### **POWER INPUT**

#### **DC Power**

R: 24 V DC

(Operational voltage range 24 V  $\pm 10$  %, ripple 10 %p-p max.)

# [4] OPTIONS

blank: none

/Q: With options (specify the specification)

## **SPECIFICATIONS OF OPTION: Q**

COATING (For the detail, refer to M-System's web site.)

/C01: Silicone coating /C02: Polyurethane coating /C03: Rubber coating

# **GENERAL SPECIFICATIONS**

**Construction**: Rack-mounted; terminal access via screw terminals at the front and via card-edge connector at the

rear; terminal cover provided

#### Connection

Input: M3.5 screw terminals (torque 0.8 N·m)

Output: Card-edge connector and M3.5 screw terminals

(torque 0.8 N·m)

Power input: Supplied from card-edge connector

Screw terminal: Nickel-plated steel

Housing material: Flame-resistant resin (black)
Isolation: Input to output 1 to output 2 to power
Input waveform: Up to 15 % of 3rd harmonic content
Overrange output: Approx. 0 to 120 % at 1 - 5V

Zero adjustment: -5 to +5 % (front) Span adjustment: 95 to 105 % (front)

## INPUT SPECIFICATIONS

Frequency: 50 or 60 Hz Input burden: 0.5 VA max.

Overload capacity: 500 % of rating for 5 sec., 120 %

continuous

Operational range: 0 - 120 % of rating

### **INSTALLATION**

Current consumption: Approx. 35 mA with voltage output 1

Approx. 55 mA with current output 1

Operating temperature: -5 to +55°C (23 to 131°F)
Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Standard Rack 10BXx

Weight: 200 g (0.44 lb)

# **PERFORMANCE** in percentage of span

Accuracy: ±0.4 %

Temp. coefficient:  $\pm 0.02$  %/°C ( $\pm 0.01$  %/°F) Response time:  $\leq 0.5$  sec. (0 - 90 %) Ripple: 0.5 %p-p max. (100/120 Hz)

Line voltage effect:  $\pm 0.1$  % over voltage range Insulation resistance:  $\geq 100$  M $\Omega$  with 500 V DC


Dielectric strength:

2000 V AC @ 1 minute (input to output 1 or output 2 or


power)

500 V AC @ 1 minute (output 1 to output 2 to power)
1500 V AC @ 1 minute (input or output or power to ground)

# **EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)**

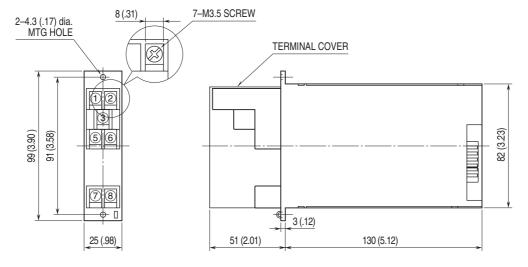

# **SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

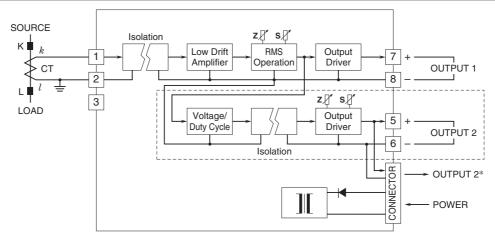

<sup>\*1</sup> output type has the output 1 connected to the card-edge connector in parallel. Remark 1) The section enclosed by broken line is only for 2nd output channel.



Specifications are subject to change without notice.