
Pomona®

Model 3352 & 3352N PJ-051 (WE310) Phone Plug To Alligator Clips

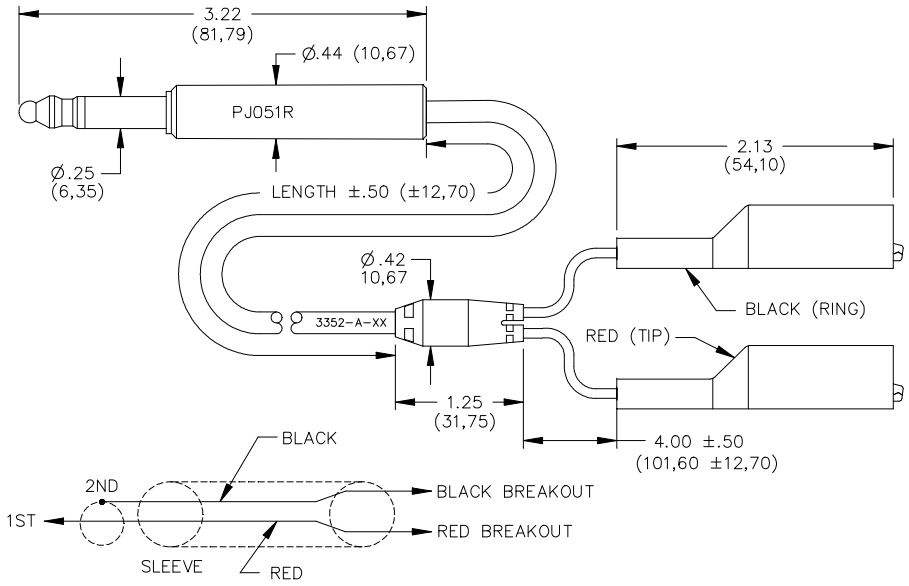

SCHEMATIC 3352

FEATURES:

- Converts WE310 (PJ-051) Female into Alligator clips.
- Length other than those specified are available on request.

MATERIALS:

Conn: 1st End – PJ-051 Phone Plug
Material: Body – Brass
Handle – Nylon. Color: Red.
Cable:
2 Cond. Twisted Pair – 18 AWG stranding 65 X 36 t.c., Vinyl insulation.
Marking "POMONA 3352-A-*". Color: Gray
Breakout: PVC molded to breakout leads and cable. Color matches color of cable.
Breakout Leads:
20 AWG stranding 41 X 36 t.c., PVC insulated, 2.21 (.087) O.D. Color matches color of insulator.
Conn: 2nd End – Insulated Alligator Clips
Material: Steel
Finish: Nickel plated. Insulation: Vinyl.
Color: Black and red.

RATINGS:

Operating Temperature: +50° C (+122° F) Max.
Operating Voltage: 150VRMS/DC
Current: 5 Amperes

ORDERING INFORMATION:


Model 3352-A-XX
XX=Cable Length, Standard Length: 60" (1524 mm)
Ordering Example: 3352-A-60 (1524 mm)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 425-446-5844
Technical Support: technicalsupport@pomonatest.com

Pomona®

Model 3352 & 3352N PJ-051 (WE310) Phone Plug To Alligator Clips

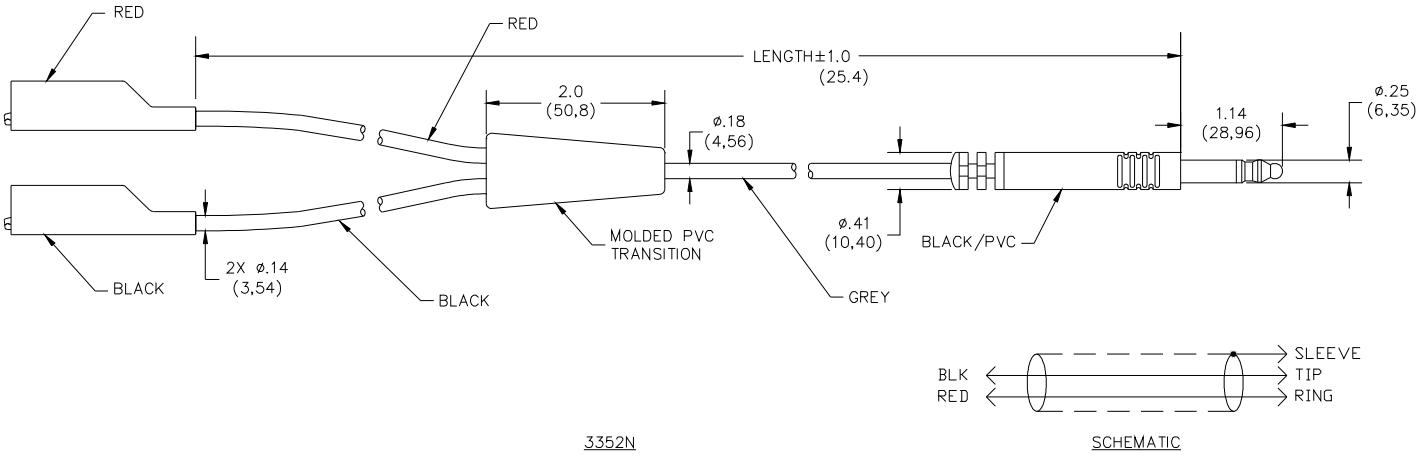

FEATURES:

- Shielded cable to reduce noise
- Provides quick access from WE-310 jack to terminals
- WE-310 Plug molded to the cable to provide optimum durability

MATERIALS:

Plug – Nickel plated brass
Cable – 2 Conductor shielded twisted pair, PVC jacket and insulation
Breakout – Molded
Alligator – Nickel plated steel, Insulator - vinyl

RATINGS:

Operating Voltage – 150 VRMS
Operating Temperature - 122°F (50°C)

ORDERING INFORMATION: Model 3352N-A-XX
XX = Cable Length, Standard Length: 60” (1524 mm)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (,51 mm), .xxx = ± .005” (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 425-446-5844
Technical Support: technicalsupport@pomonatest.com