

SAW Filter 394MHz

Model: TA0559A

Part No: MP02410

REV NO.: 2


A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC voltage: 3 V
3. Operating Temperature: -10°C to +50°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.
Center frequency Fc	MHz	-	394	-
Insertion Loss 392~396MHz IL	dB	-	1.7	3.0
Ripple 392~396MHz	MHz	-	0.4	1.3
Absolute Attenuation:(Reference level from 0dB)				
Fc -100 to Fc -40 MHz	dB	53	61	-
Fc -40 to Fc -12 MHz	dB	48	52	-
Fc +12 to Fc +40 MHz	dB	35	40	-
Fc +40 to Fc +100 MHz	dB	50	57	-
Source impedance Zs	Ω	-	50	-
Load impedance ZL	Ω	-	50	-

C. MEASUREMENT CIRCUIT:

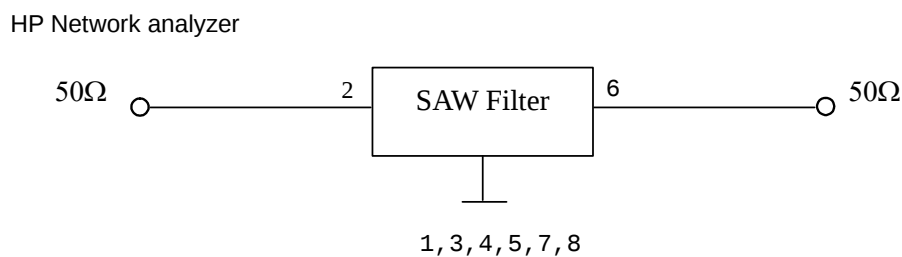



SAW Filter 394MHz

Model: TA0559A

Part No: MP02410

REV NO.: 2

D. FREQUENCY CHARACTERISTICS:

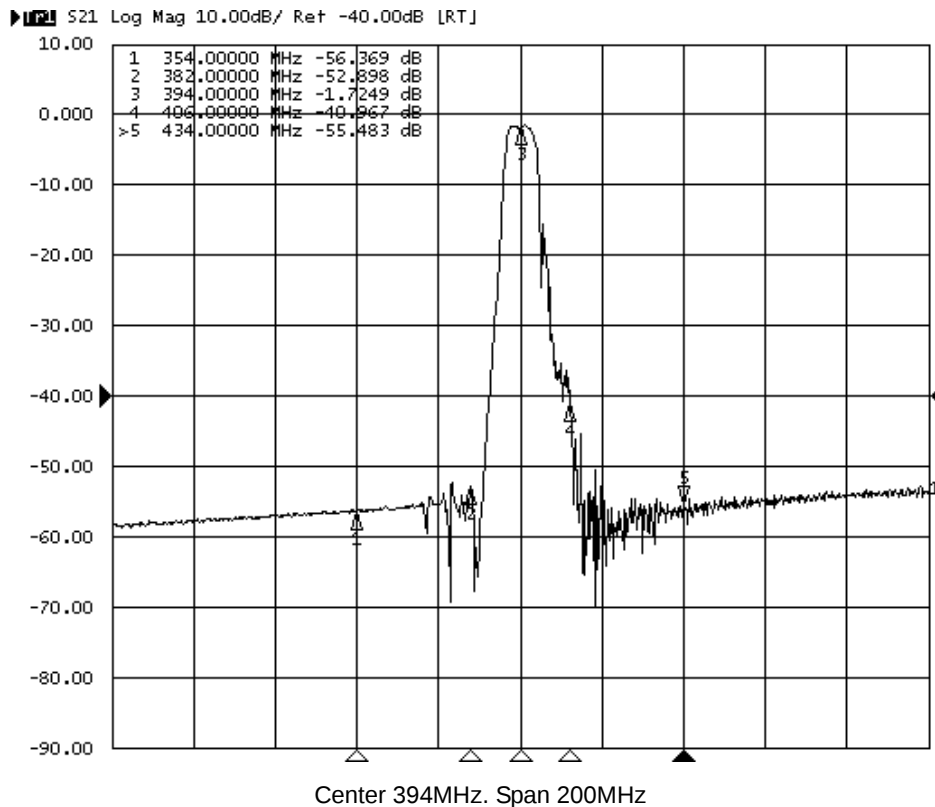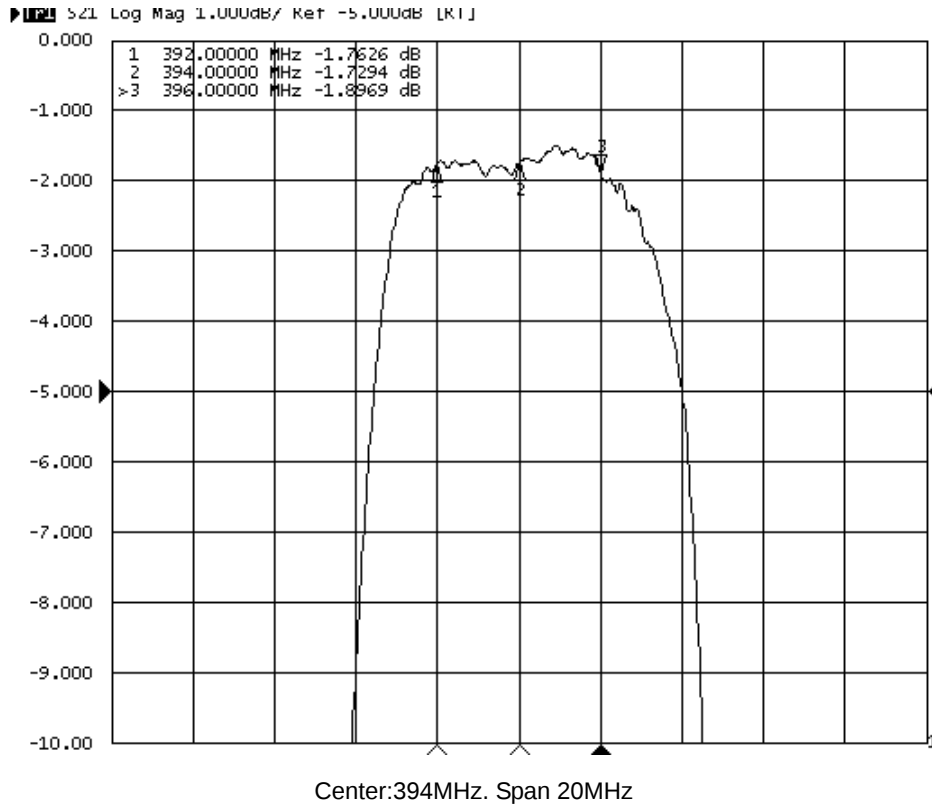

SAW Filter 394MHz

Model: TA0559A


Part No: MP02410

REV NO.: 2

S11

▶ **[F2]** S11 Smith (R+jX) Scale 1.000U [F2]

>1 394.00000 MHz 63.227 Ω -1.3685 Ω 308.71 pF

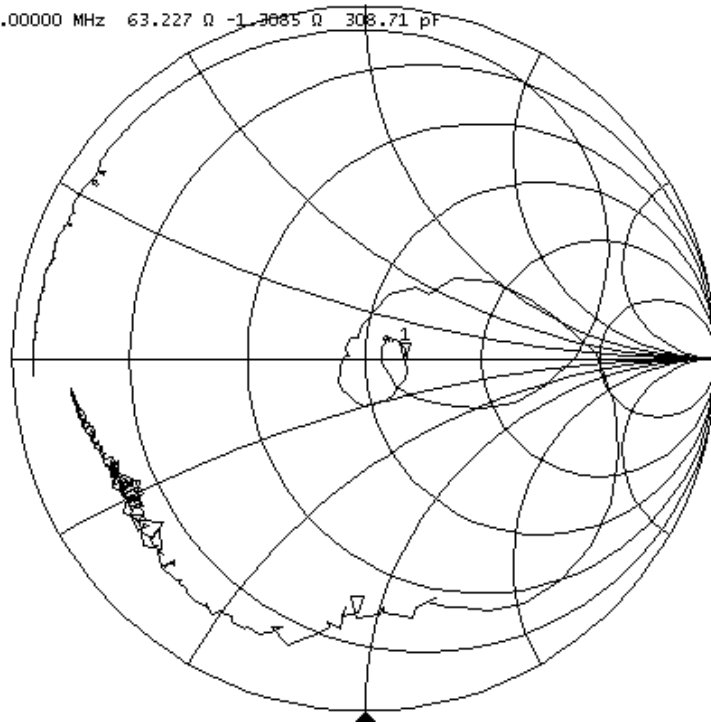


Center 394MHz. Span 100MHz

S22

▶ **[F2]** S22 Smith (R+jX) Scale 1.000U [F2]

>1 394.00000 MHz 60.878 Ω -3.3149 Ω 121.86 pF

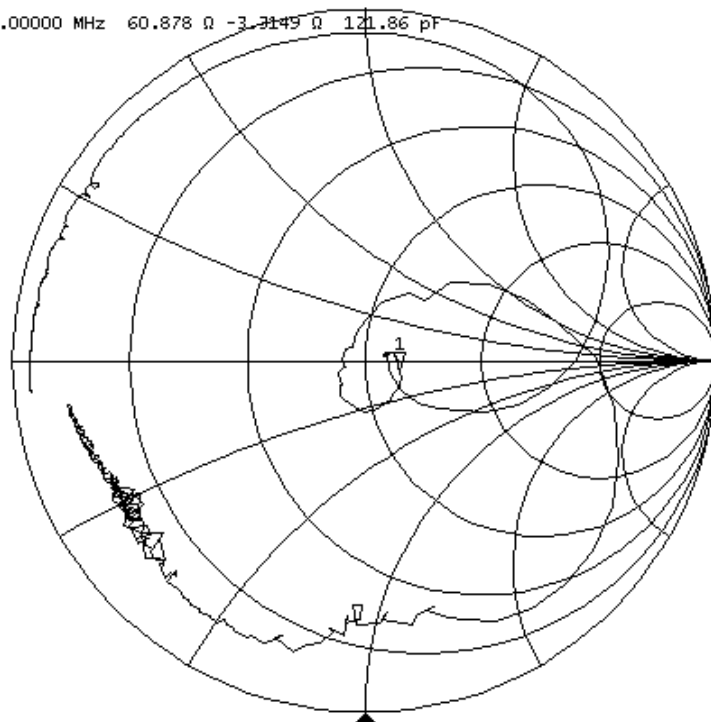

Center 394MHz. Span 100MHz


SAW Filter 394MHz

Model: TA0559A


Part No: MP02410

REV NO.: 2

E. OUTLINE DRAWING:

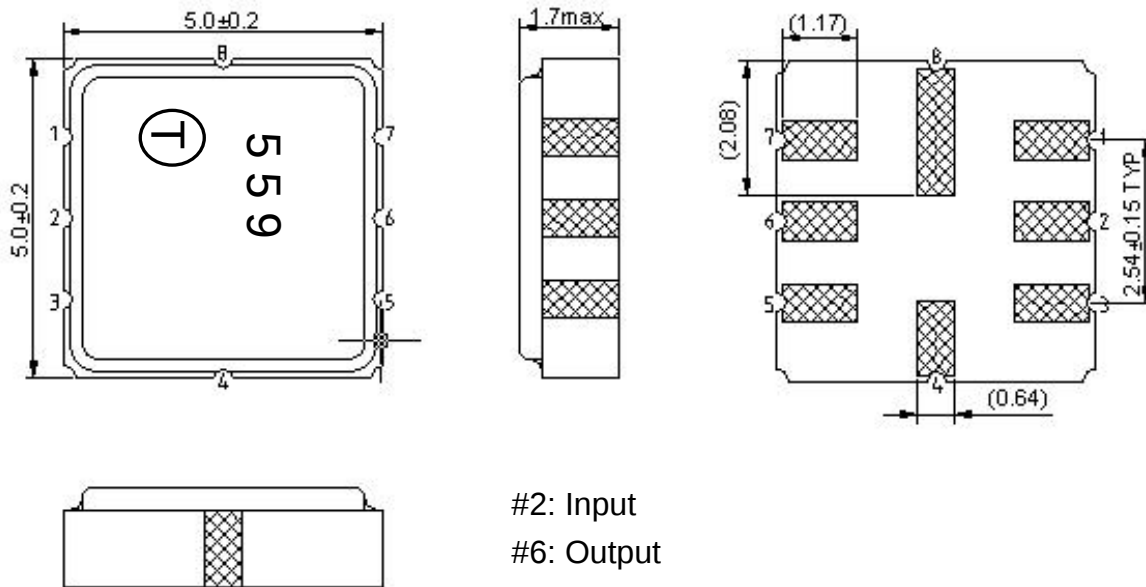

F. PCB FOOTPRINT:

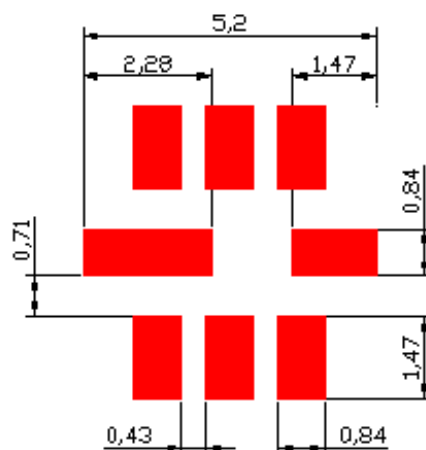

SAW Filter 394MHz


Model: TA0559A

Part No: MP02410


REV NO.: 2

G. PACKING:

1. REEL DIMENSION

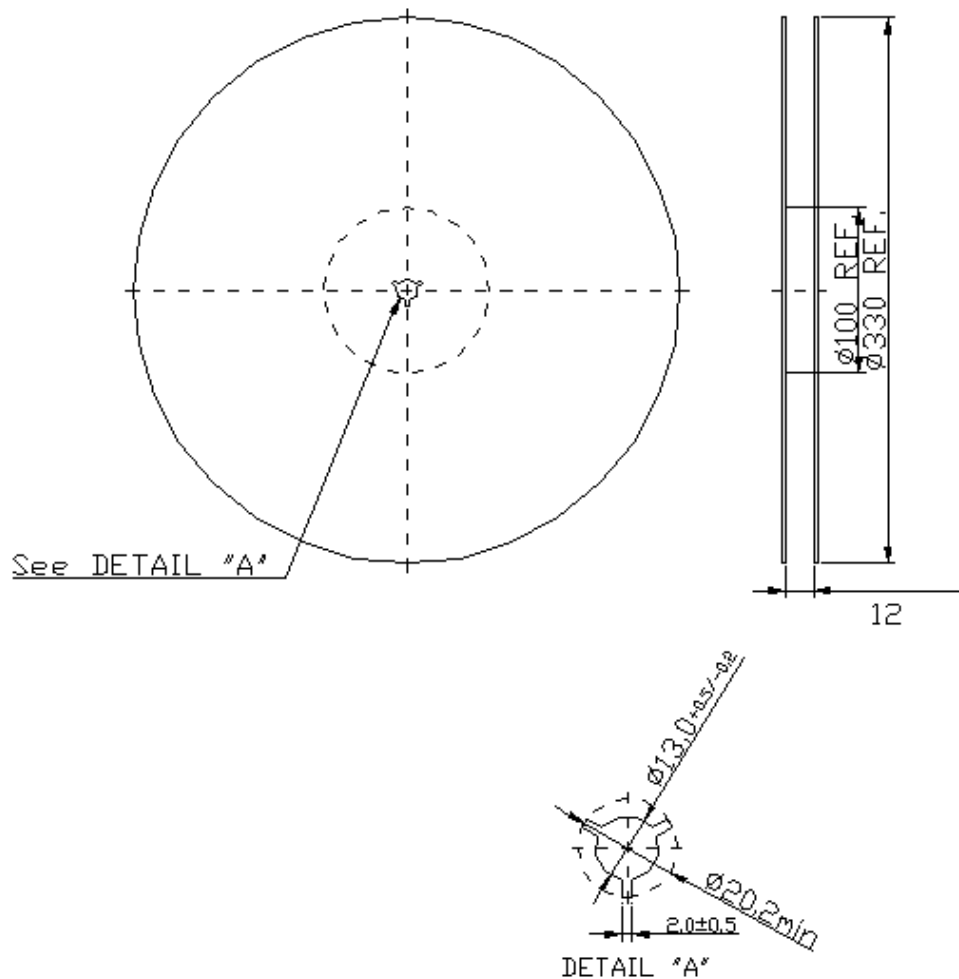

2. TAPE DIMENSION

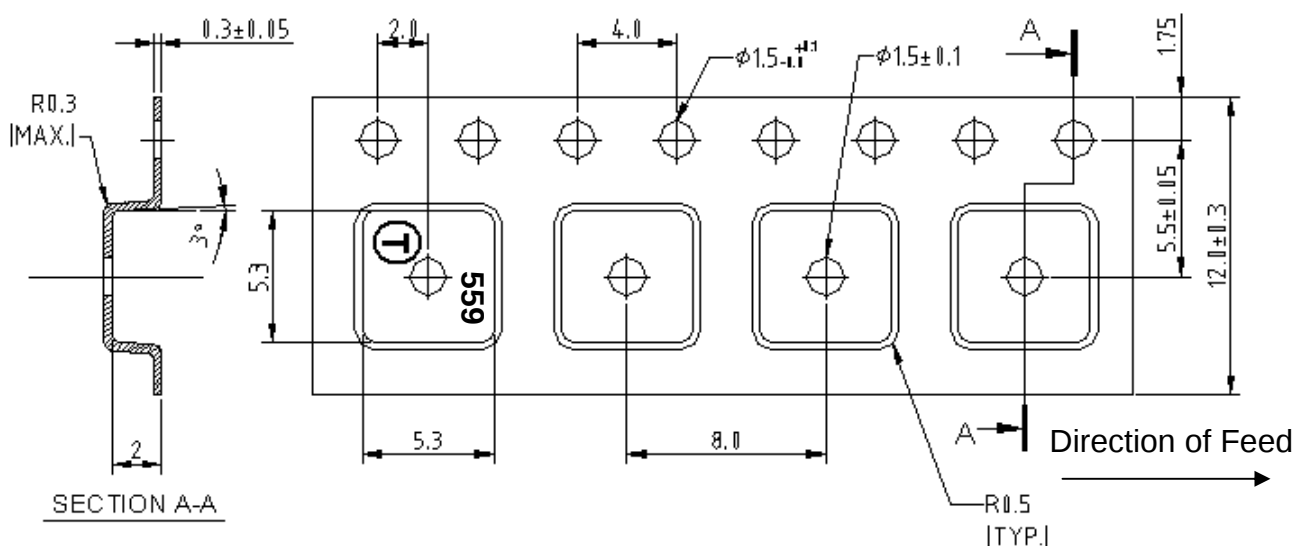

SAW Filter 394MHz

Model: TA0559A

Part No: MP02410

REV NO.: 2

H. RECOMMENDED REFLOW PROFILE:

