

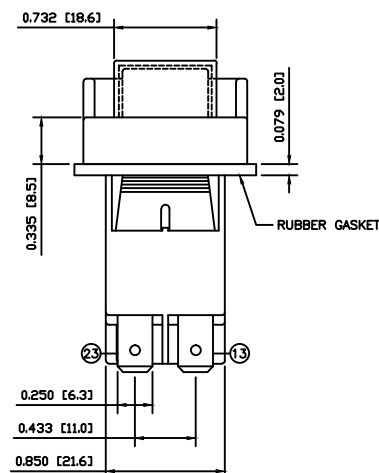
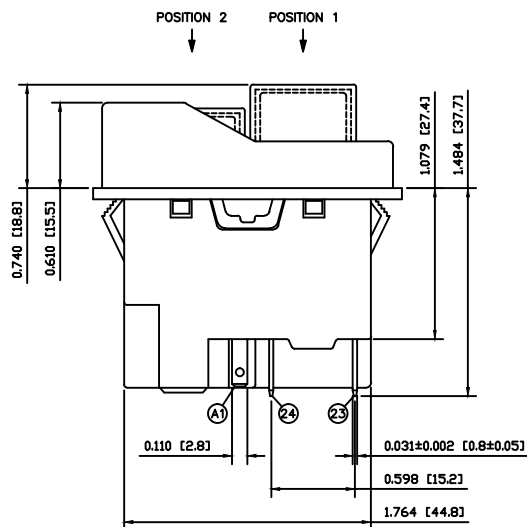


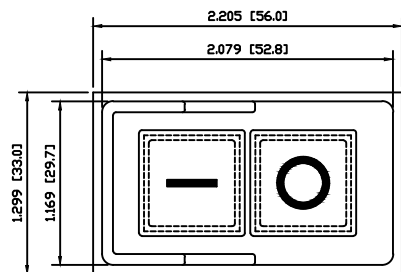

SCHEMATIC



SPECIFICATIONS

FUNCTION:
2P1T OFF-ON
Auto OFF Below Calibration Voltage
Remote Trip

RATINGS:
ANSI/UL 508 and CAN/CSA C22.2 No.14 (E195908):
16A 220-240VAC [cURus]
2HP 220-240VAC (12A FLA, 72A LRA) [cURus]

CALIBRATION VOLTAGE:
Use: 230V 60Hz
Release: 120-160V

ELECTRICAL LIFE:
6,000 Cycles [cURus]

INGRESS PROTECTION:
IP55

APPROVALS:

cURus RoHS COMPLIANT


COLORS AND MARKINGS

BEZEL:
Black
ACTUATOR:
ON: Green
OFF: Red
MARKING:
I/O Vertical (1)
MARKING COLOR:
White

MATERIALS

UPPER BODY:
Polyamide 6/6 (PA66)
LOWER BODY:
Polyamide 6/6 (PA66+G10)
BEZEL:
Polyamide 6/6 (PA66+G10)
ACTUATORS:
Polyamide 6/6 (PA66)
MOUNTING EARS:
Polyamide 6/6 (PA66)
COVER:
Polyvinyl Chloride (PVC)
CONTACTS:
Silver Alloy Clad Copper (AgSnO/Cu)
TERMINALS:
Brass
GASKET:
Rubber

SUGGESTED PANEL CUTOUT



BODY	A	09/08/07	CAB
COLORS	A	09/08/07	CAB
MATERIALS	A	09/08/07	CAB
SPECIFICATIONS	A	09/08/07	CAB
REFERENCE	REV.	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	INITIAL RELEASE	22034	10/28/2015	MW
REV.	DESCRIPTION	PCR	DATE	DRAWN BY

DIMENSIONS
INCHES [MILLIMETERS]

GENERAL TOLERANCES
 ± 0.020 [± 0.5] / $\pm 1^\circ$

SCALE
DRAWING NOT TO SCALE

PROJECTION
FIRST ANGLE

TITLE	KJD17-22413-112
ITEM NUMBER	34-KJD1722413112
DATE	10/28/2015
REVISION	A