

SHEET 1 OF 1

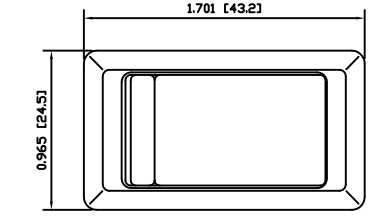

SUGGESTED PANEL CUTOUT



MATERIALS

BODY:
Phenolic (PF), UL94 V-2

ACTUATOR:
Polyamide 6/6 (PA66), UL94 V-2
Brass

SEALING MEMBRANE;
Polyvinyl Cholride (PVC)

SPRING:
Piano Wire

MOBILE CONTACT:
Silver Plated Copper

CONTACTS:
Silver Clad Copper

RIVETS:
Copper

TERMINALS:
Brass

SPECIFICATIONS

FUNCTION:
2P2T ON-ON

RATINGS:
ANSI/UL 508 and CAN/CSA C22.2 No.14 (E195908):
20A 125VAC [cURus]
15A 277VAC [cURus]
2HP 125/250VAC [cURus]


CONTACT RESISTANCE:
Initial: 50mΩ Max. at 50VAC


ELECTRICAL LIFE:
6,000 Cycles [cURus]

TEMPERATURE:
Operating: -20°C to 55°C [cURus]

INGRESS PROTECTION:
IP54

APPROVALS:
cULus RoHS COMPLIANT

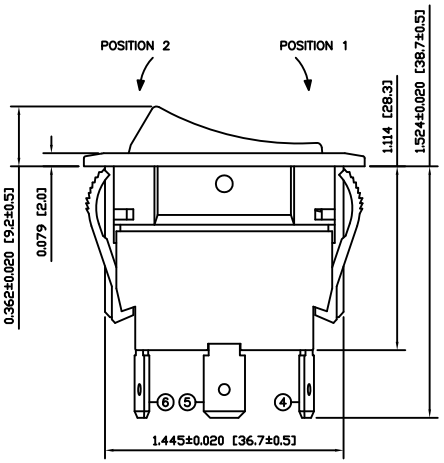

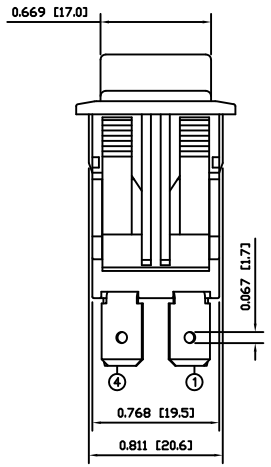


COLORS AND MARKINGS

BODY COLOR:
Black


ACTUATOR COLOR:
Black

MARKINGS:
None

MARKING COLOR:
None

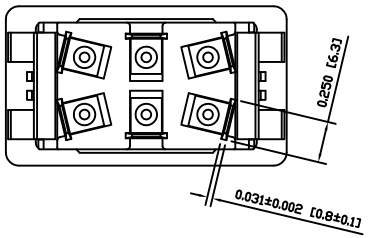

SCHEMATIC



ACTUATOR	A	09/06/11	CAB
BODY	A	09/06/12	CAB
COLORS	A	09/06/15	CAB
MATERIALS	A	09/06/15	CAB
SPECIFICATIONS	A	09/06/15	CAB
REFERANCE	REV.	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

REV.	DESCRIPTION	PCR	DATE	DRAWN BY
A	INITIAL RELEASE	PCR00051	09/08/05	CAB

DIMENSIONS: INCHES [MILLIMETERS]
GENERAL TOLERANCES: ±0.008 [±0.2] / ±1°
SCALE: DRAWING NOT TO SCALE
PROJECTION:

E•SWITCH | LAMB INDUSTRIES

RVW4GD1100

DRAWING NUMBER	DATE	REVISION
34-RVW4GD1100	AUGUST 6, 2009	A