

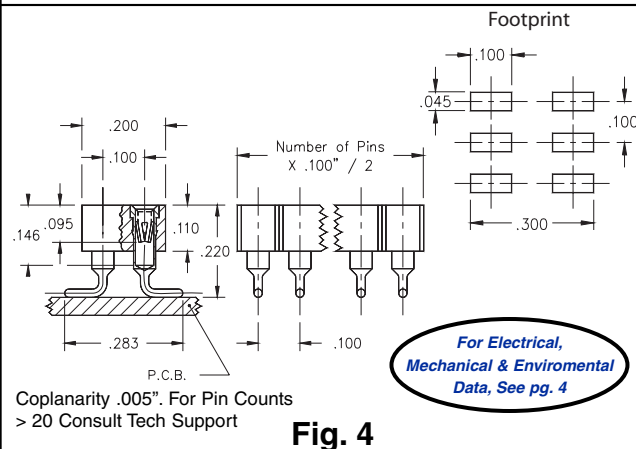
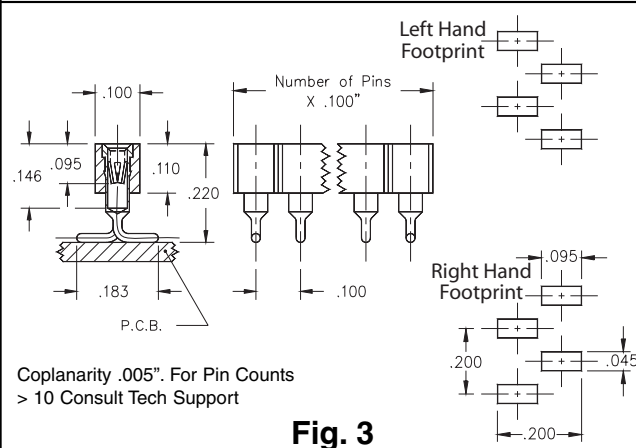
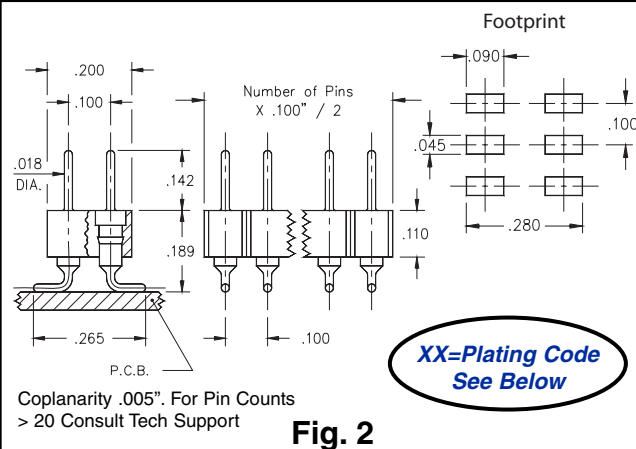


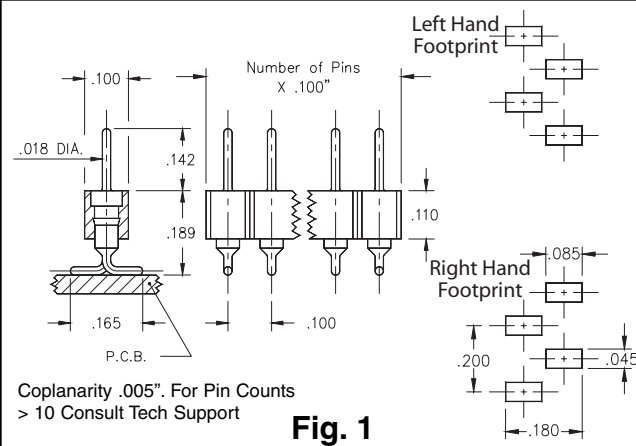

- Headers (350 & 450) use MM# 3404 pins. See page 179 for details.
- Sockets (310 & 410) use MM# 1005 receptacles and accept pin diameters from .015-.025. See page 137 for details.
- Coplanarity .005" (Single Row max 10 pins; Double Row max 20 pins). For higher pin counts contact technical support.
- Insulators are high temp. thermoplastic.

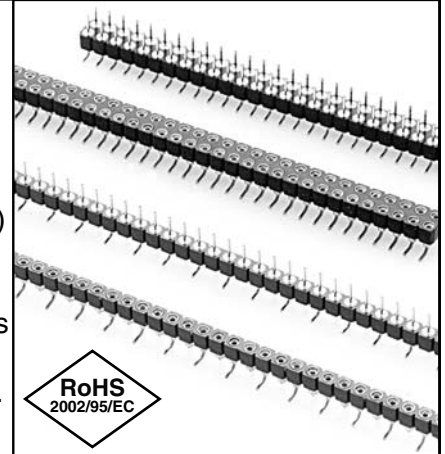

*For RoHS compliance  
select plating code.*

### Ordering Information

|                          |                                                                                      |         |             |          |
|--------------------------|--------------------------------------------------------------------------------------|---------|-------------|----------|
| Fig. 1L                  | Single Row Header, Left Hand Footprint<br>Odd or Even # of pins                      |         |             |          |
|                          | 350-XX-1 _ -00-106000<br>Specify # of pins → 02-64                                   |         |             |          |
| Fig. 1R                  | Single Row Header, Right Hand Footprint<br>Even # of pins                            |         |             |          |
|                          | 350-XX-1 _ -00-107000<br>Specify even # of pins → 02-64                              |         |             |          |
| Fig. 2                   | Double Row Header, Even # of pins                                                    |         |             |          |
|                          | 450-XX-2 _ -00-106000<br>Specify even # of pins → 04-72                              |         |             |          |
| SPECIFY PLATING CODE XX= |                                                                                      | 10◇     | 90          | 40◇      |
| Pin Plating              |  | 10μ" Au | 200μ" Sn/Pb | 200μ" Sn |
| Fig. 3L                  | Single Row Socket, Left Hand Footprint<br>Odd or Even # of pins                      |         |             |          |
|                          | 310-43-1 _ -41-105000<br>Specify # of pins → 02-64                                   |         |             |          |
| Fig. 3R                  | Single Row Socket, Right Hand Footprint<br>Even # of pins                            |         |             |          |
|                          | 310-43-1 _ -41-107000<br>Specify even # of pins → 02-64                              |         |             |          |
| Fig. 4                   | Double Row Socket, Even # of pins                                                    |         |             |          |
|                          | 410-43-2 _ -41-105000<br>Specify even # of pins → 04-72                              |         |             |          |
| PLATING CODE =           |                                                                                      |         |             | 43◇      |
| Sleeve (Pin)             |  |         |             | 200μ" Sn |
| Contact (Clip)           |   |         |             | 30μ" Au  |