





LOC		DIST		REVISONS			
P	F	L	TR	DESCRIPTION	DATE	DWN	APVD
		Y3		REVISED PER ECO-11-004587	11 MAR 11	RK	HMR

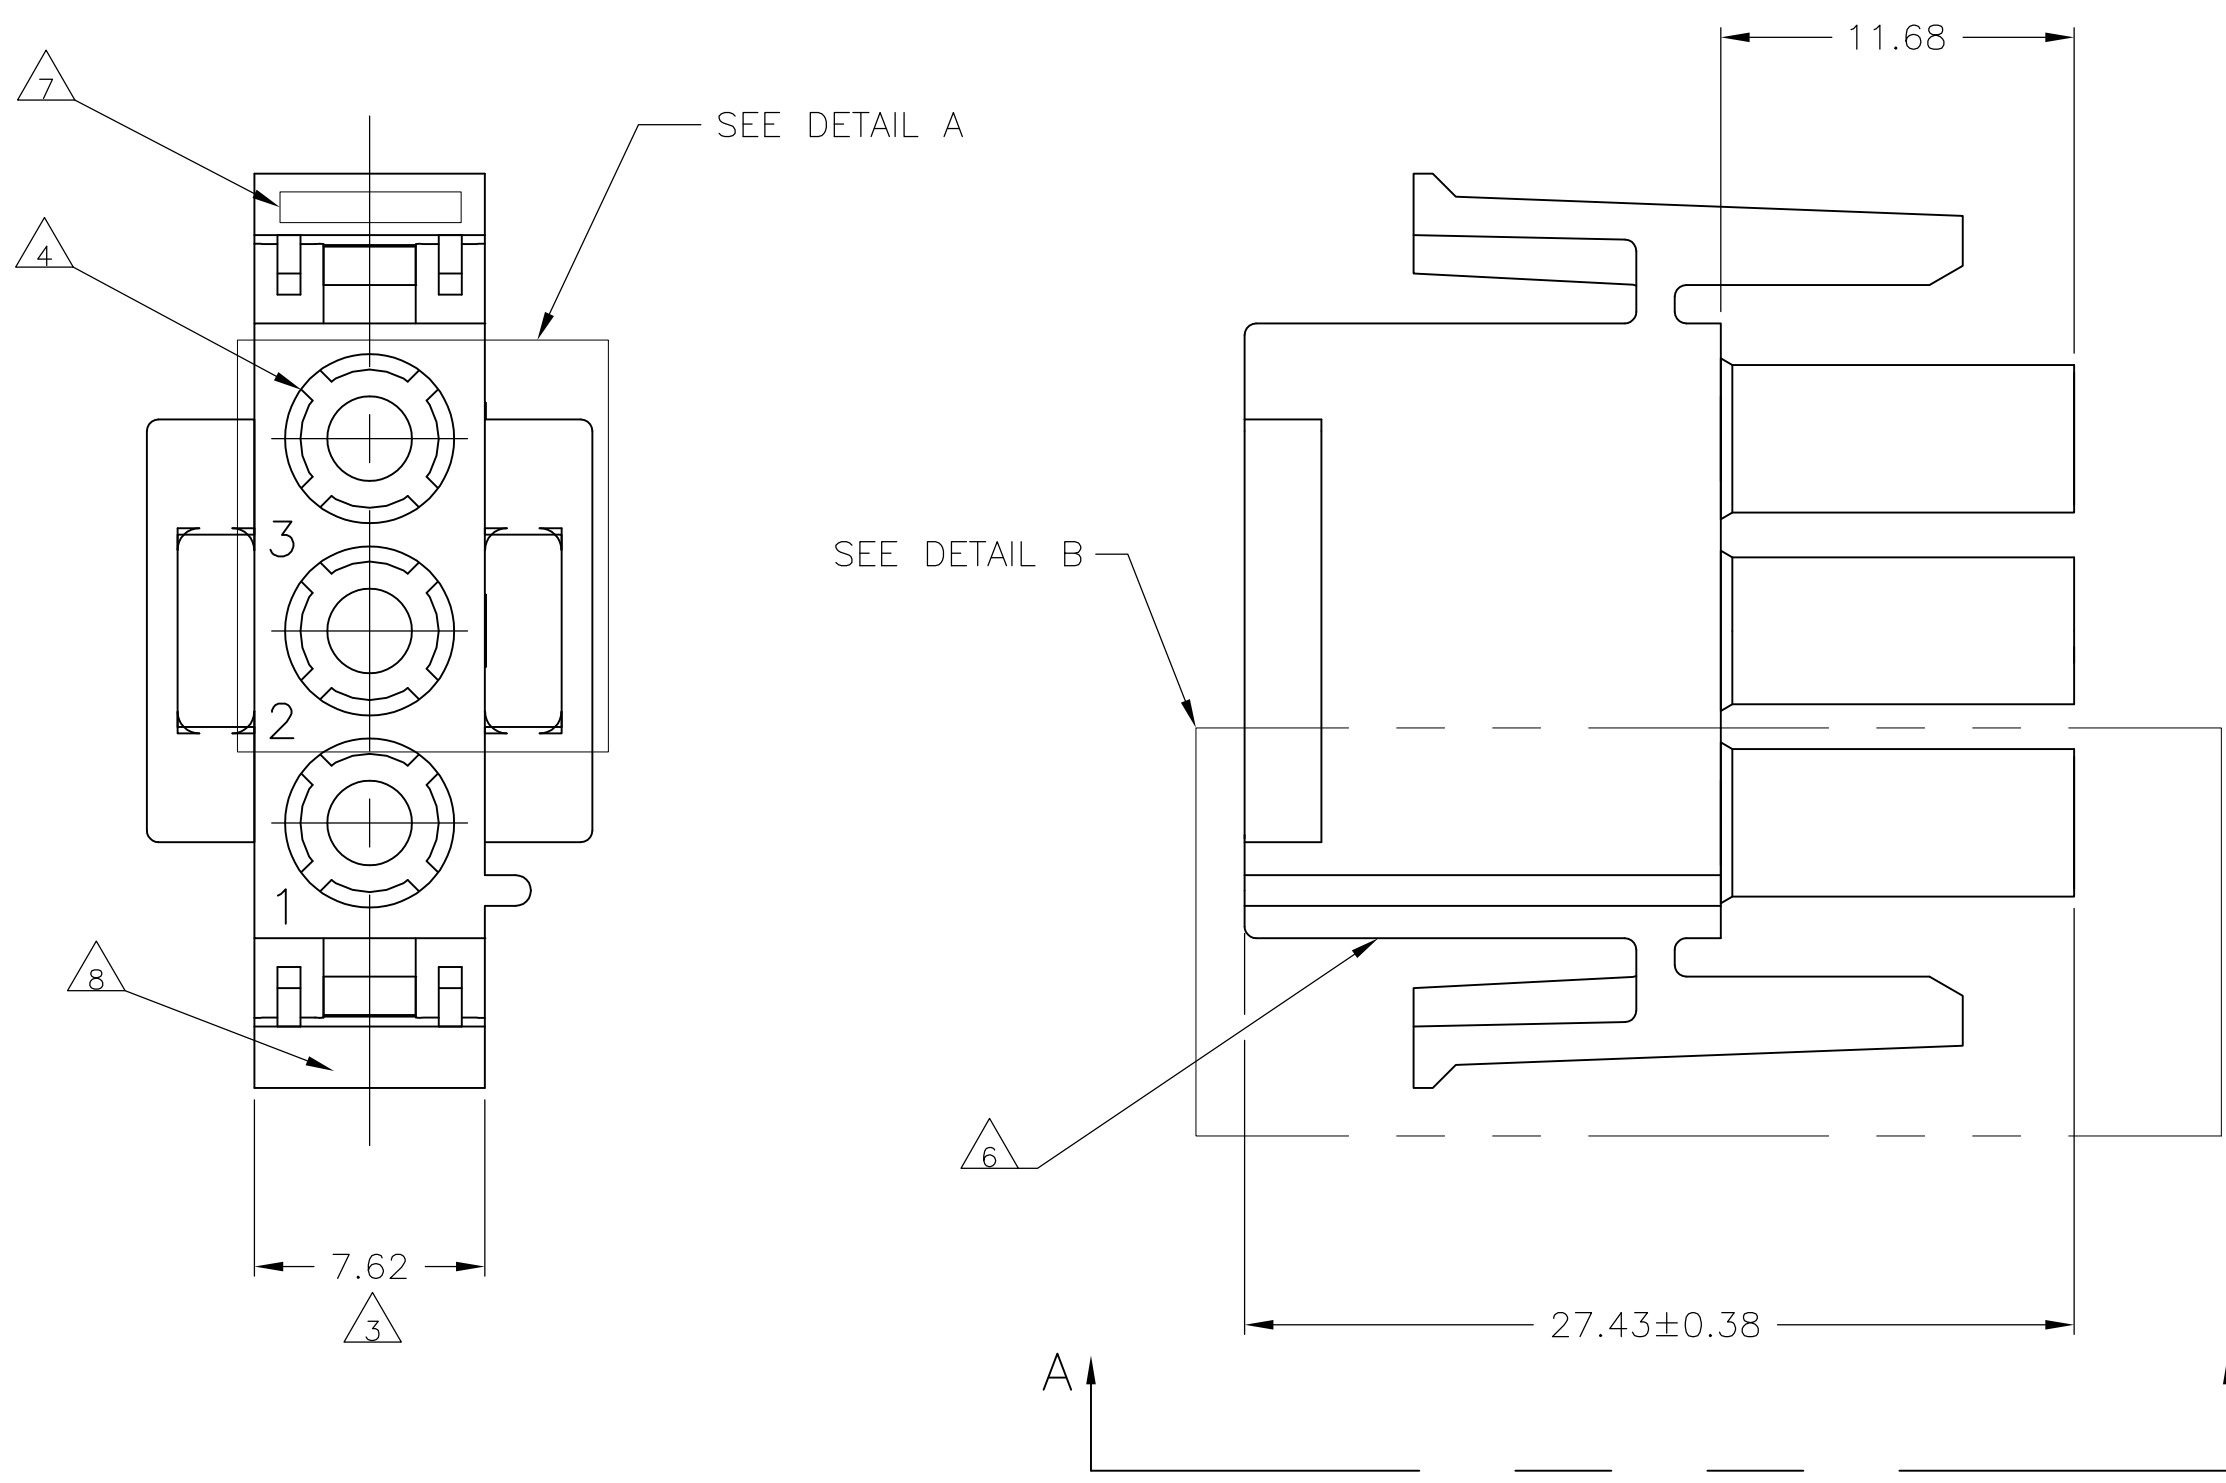


- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
- SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
- DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- NOT MANUFACTURED IN U.S.
- UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- TRADEMARK LOCATION (AMP OR TE CONNECTIVITY).
- MANUFACTURING LOCATION ID (OPTIONAL).

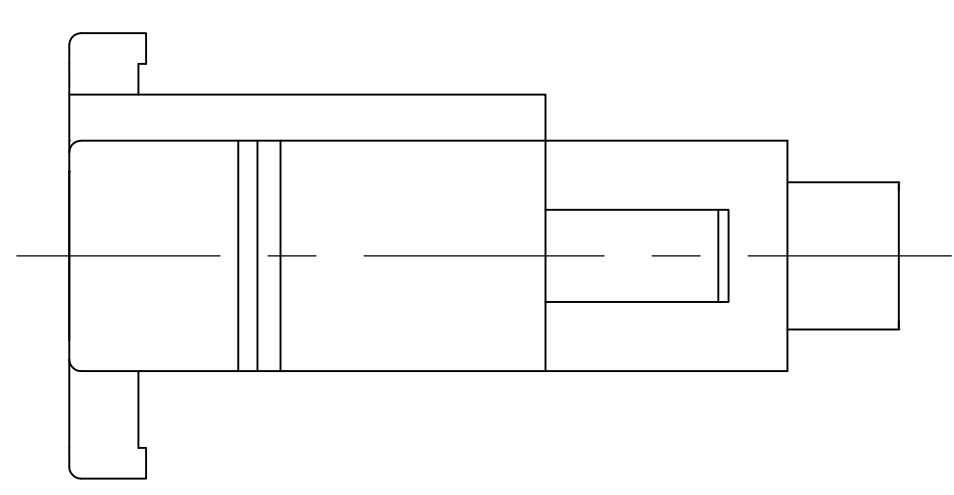


VIEW A-A
350766-4 ONLY

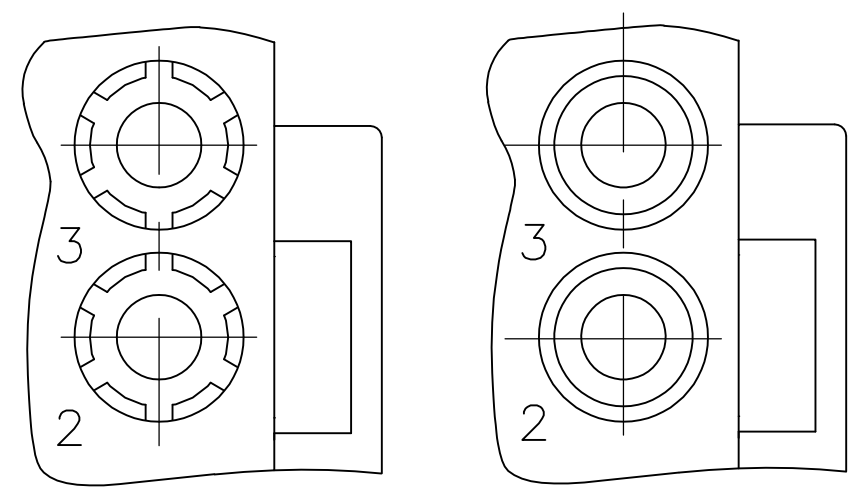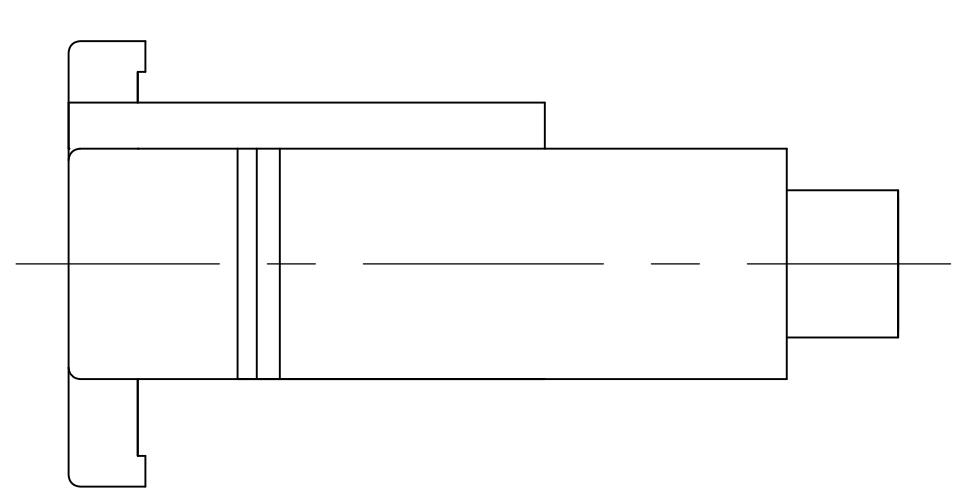


DETAIL A
OPTIONAL CONSTRUCTION

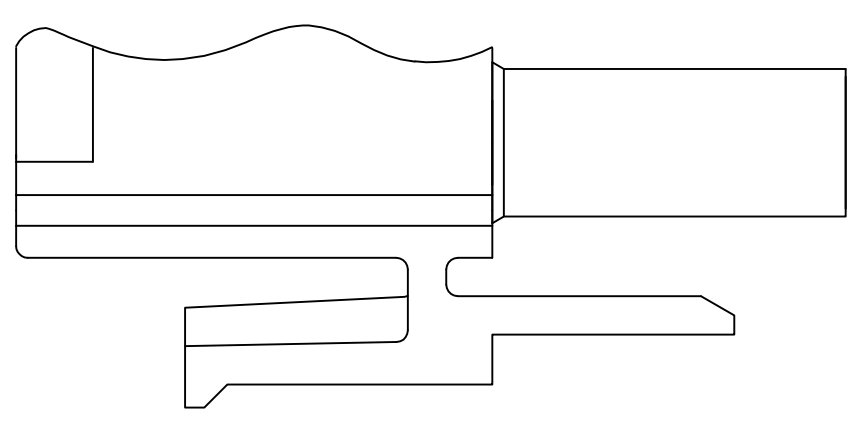

DETAIL B
350766-4 ONLY

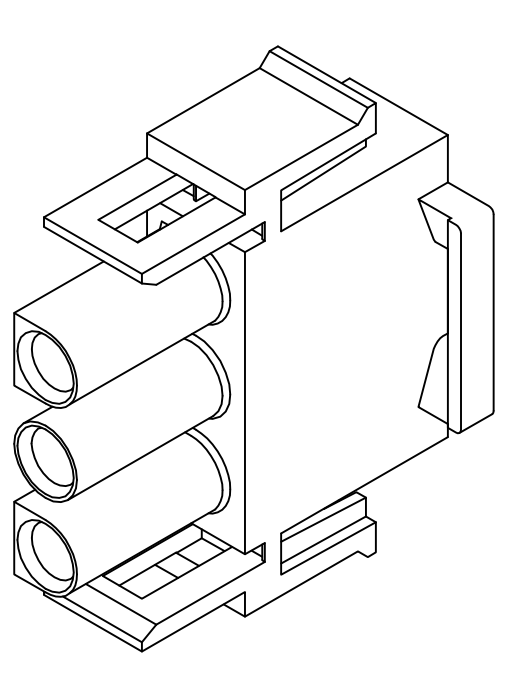


350766-4 3-DIMENSIONAL MODEL
NTS

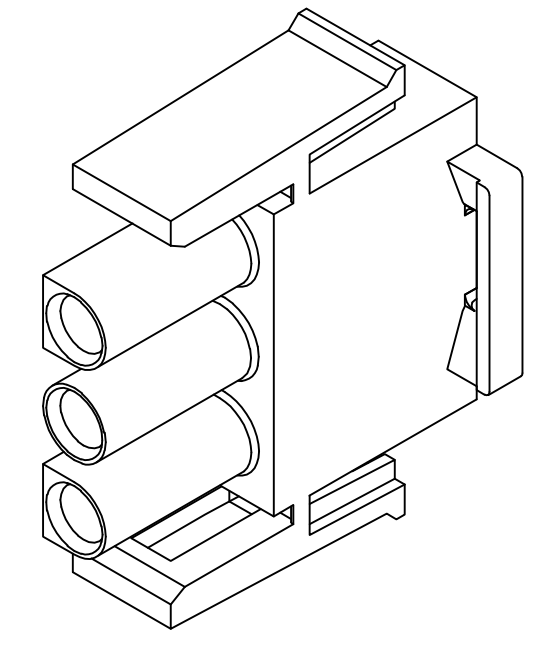

3-DIMENSIONAL MODEL
NTS

27.43	1.080
20.32	.800
14.73	.580
11.68	.460
7.62	.300
0.38	.015
0.13	.005
MM	IN
CONVERSION TABLE	

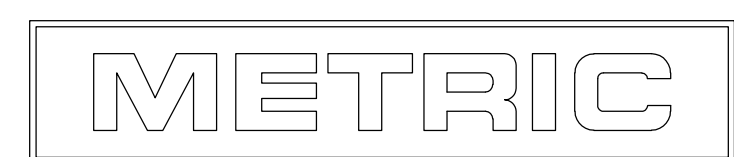

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC ± -

1. PLC ± -

2. PLC ± 0.13 [.005]

3. PLC ± -

4. PLC ± -

ANGLES ± 0.30°

FINISH -

MATERIAL

NYLON, UL 94V-0

DWN

K. WHITAKER

07OCT05

CHK

S. RIDGILL

07OCT05

APVD

S. RIDGILL

07OCT05

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

NAME

PLUG, 3 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)

SIZE

A1

CAGE CODE

00779

DRAWING NO

350766

RESTRICTED TO

-

SCALE

4:1

SHEET

1

OF

1

REV

Y3

STE

TE Connectivity