


# Keysight Technologies

## WLAN 802.11a/b/g/j/p/n/ac/af/ah X-Series Measurement Application N9077A & W9077A

### Technical Overview

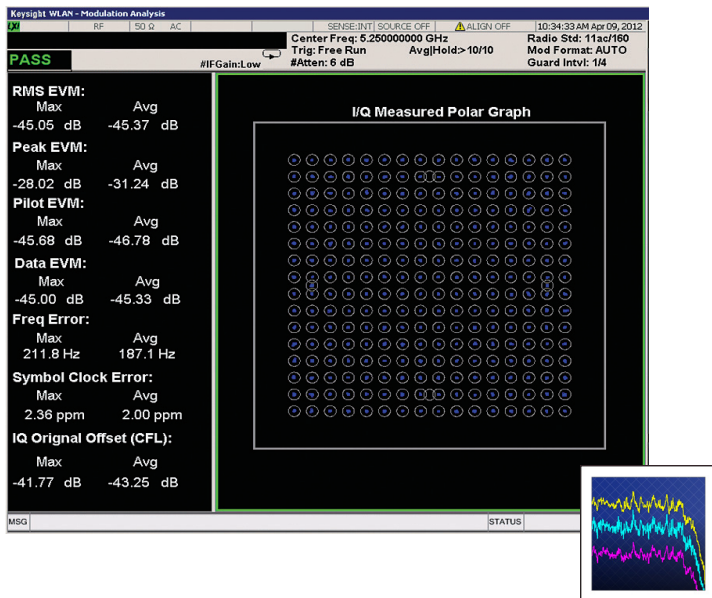

- Perform WLAN spectrum and modulation measurements based on IEEE 802.11a/b/g/j/p/n/ac/af/ah
- 802.11ac 20/40/80/160 MHz and 80+80 MHz, modulation format support up to 1024QAM
- Perform one-button, standard-based measurements with pass/fail tests
- Hardkey/softkey manual user interface and SCPI remote user interface
- Built-in, context-sensitive help
- Move application between X-Series signal analyzers with transportable licensing

## WLAN 802.11a/b/g/j/p/n/ac/af/ah Measurement Application

The WLAN measurement application transforms the X-Series signal analyzers into IEEE 802.11 standard-based WLAN transmitter testers by adding fast, one-button RF conformance measurements that will help you design, evaluate, and manufacture your WLAN transmitter. The software's capabilities are further enhanced because it is closely aligned with the IEEE standards— including 802.11a/b/g/j/p/n/ac/af and 802.11ah—allowing you to stay on the leading edge of design and manufacturing challenges.

### X-Series measurement applications

X-Series measurement applications increase the capability and functionality of Keysight Technologies, Inc. signal analyzers to speed time to insight. They provide essential measurements for specific tasks in general-purpose, cellular communications, wireless connectivity and digital video applications, covering established standards and modulation types. Applications are supported across X-Series analyzers, with the only difference being the level of performance achieved by the hardware you select.

### Real-time spectrum analysis for WLAN 802.11

Adding real-time spectrum analysis to a PXA or MXA signal analyzer addresses the measurement challenges associated with dynamic RF signals such as bursted packet transmissions of WLAN, and to identify interference caused by various signals in the ISM (2.4 or 5 GHz) bands.

- Accurately observe power changes for an 802.11 signal within a 160-MHz real-time bandwidth
- Capture random interfering signals with durations as short as 3.57  $\mu$ s in ISM bands for WLAN signals
- Perform fast, wideband measurements without compromising EVM, ACPR and other RF measurements
- Enhance dynamic range with 1-dB variable attenuation (< 3.6 GHz) and fine-adjustable resolution bandwidths

## Download your next insight

Keysight software is downloadable expertise. From first simulation through first customer shipment, we deliver the tools your team needs to accelerate from data to information to actionable insight.

- Electronic design automation (EDA) software
- Application software
- Programming environments
- Utility software



Learn more at  
[www.keysight.com/find/software](http://www.keysight.com/find/software)

Start with a 30-day free trial.  
[www.keysight.com/find/free\\_trials](http://www.keysight.com/find/free_trials)

## RF Transmitter Tests

By using the X-Series signal analyzers with the WLAN measurement application, you can perform WLAN transmitter measurements in the time, frequency, and modulation domains. IEEE 802.11a,b,g, j, p signals, 802.11ah 1/2/4/8/16 MHz signals 802.11n 20 MHz and 40 MHz signals, 802.11af 6/7/8MHz, as well as 802.11ac 20/40/80/160 MHz and 80+80 MHz signals with all modulation formats, as shown in Tables 3-5, respectively, can be measured automatically.

### Standard-based RF transmitter tests

RF transmitter test requirements for WLAN are defined in the IEEE 802.11 series standard. Table 3 shows the required transmitter tests along with the corresponding measurement applications.

Test reference numbers starting with 17 apply to 802.11a, those that start with 18 apply to 802.11b, and those starting with 19 apply to 802.11g, as well as some 802.11a and 802.11b items, due to forward compatibility requirements. Table 4 and Table 5 show the requirements for 802.11n and 802.11ac single-channel with test reference numbers that start with 20 and 22. 802.11ah is defined in reference number starting from 24.

Table 1. Required 802.11a/b/g WLAN transmitter measurements and the corresponding measurements in the N/W9077A and 89600 VSA software

IEEE 802.11a/j/p	IEEE 802.11b	IEEE 802.11g	Transmitter test	N/W9077A Option 2FP WLAN measurement application	89601B Option B7R WLAN modulation analysis
18.3.9.2	17.4.7.2	18.3.9.2 19.4.8.2	Transmit power	Channel power	Can be performed using band power marker
18.3.9.3	17.4.7.4	18.3.9.3 147.4.7.4	Spectrum mask	Spectrum emission mask	Not available <sup>1</sup>
18.3.9.4	17.4.6.9	18.3.9.4	Transmission spurious	Spurious emission	Not available <sup>1</sup>
18.3.9.5	17.4.7.5	18.3.9.5 19.4.8.3	Center frequency tolerance	Frequency error <sup>2</sup>	Frequency error <sup>2</sup>
18.3.9.6	17.4.7.6	18.3.9.6 19.4.8.4	Symbol (chip) clock frequency tolerance	Symbol (chip) clock error <sup>2</sup>	Symbol clock error <sup>2</sup>
18.3.9.7.1		18.3.9.7.1	Center frequency leakage	IQ origin offset <sup>2</sup>	IQ offset <sup>2</sup>
	17.4.7.7		Power on/down ramp	Power vs time	Not available
	17.4.7.8		RF carrier suppression	Carrier suppression <sup>2</sup>	Not available
18.3.9.7.3		18.3.9.7.3	Spectral flatness	Spectral flatness	OFDM equalized channel frequency resp.
18.3.9.7.4		18.3.9.7.4	Constellation error (EVM rms)	RMS EVM	EVM (rms)
18.3.9.8	17.4.7.9	18.3.9.8	Modulation accuracy test <sup>3</sup>	Modulation analysis	Modulation analysis

1. If 89601B with Option B7R is used with a Keysight spectrum or signal analyzer, these measurements are available as part of the spectrum analyzer mode under the power suite measurements.
2. For the N/W9077A application, these values are found in the "numeric results" trace under the modulation analysis view. For 89601B with Option B7R, these values are found under the "Syms/Errs" trace.
3. The standard describes the procedure for making this measurement, but doesn't specify test limits.

Table 2. Required 802.11n WLAN transmitter measurements and the corresponding measurements in N/W9077A and 89600 VSA software

IEEE 802.11n	Transmitter test	N/W9077A Option 3FP WLAN measurement application	89601B Option B7Z 802.11n MIMO modulation analysis
20.3.20.1	Transmit spectrum mask	Spectrum emission mask	Not available
20.3.20.2	Spectral flatness	Spectral flatness	OFDM equalized channel frequency resp.
20.3.20.3	Transmit power	Channel power	Can be performed using band power marker
20.3.20.4	Transmit center frequency tolerance	Frequency error <sup>1</sup>	Frequency error <sup>1</sup>
20.3.20.6	Symbol clock frequency tolerance	Symbol (chip) clock error <sup>1</sup>	Symbol clock error <sup>1</sup>
20.3.20.7.2	Center frequency leakage	IQ origin offset <sup>1</sup>	IQ offset <sup>1</sup>
20.3.20.7.3	Constellation error (EVM rms)	RMS EVM	EVM (rms)
20.3.20.7.4	Modulation accuracy test <sup>2</sup>	Modulation analysis	Modulation analysis

Table 3. Required 802.11ac WLAN transmitter measurements and the corresponding measurements in N9077A and 89600 VSA software

IEEE 802.11ac (D7.0)	Transmitter test	N9077A Option 4FP WLAN measurement application	89601B Option BHJ 802.11ac and MIMO modulation analysis
22.3.18.1	Transmit spectrum mask	Spectrum emission mask	Not available
22.3.18.2	Spectral flatness	Spectral flatness	Channel freq resp.
22.3.18.3	Transmit center frequency tolerance	Frequency error <sup>1</sup>	Frequency error <sup>1</sup>
22.3.18.3	Symbol clock frequency tolerance	Symbol (chip) clock error <sup>1</sup>	Symbol clock error <sup>1</sup>
22.3.18.4.2	Transmit center frequency leakage	IQ origin offset <sup>1</sup>	IQ offset <sup>1</sup>
22.3.18.4.3	Transmit constellation error (EVM rms)	RMS EVM	EVM (rms)
22.3.18.4.2	Modulation accuracy test <sup>2</sup>	Modulation analysis	Modulation analysis
IEEE 802.11ah (D3.0)	Transmitter test	N9077A Option 6FP WLAN measurement application	
24.3.16.1	Transmit spectrum mask	Spectrum emission mask	
24.3.16.2	Spectral flatness	Spectral flatness	
24.3.16.3	Transmit center frequency tolerance	Frequency error <sup>1</sup>	
24.3.16.4	Symbol clock frequency tolerance	Symbol clock error <sup>1</sup>	
24.3.16.4.2	Transmit center frequency leakage	IQ origin offset <sup>1</sup>	
24.3.16.4.3	Transmit constellation error (EVM rms)	RMS EVM	
24.3.16.4.4	Modulation accuracy test <sup>2</sup>	Modulation analysis	
IEEE 802.11af (2013)	Transmitter test	N9077A Option 7FP WLAN measurement application	
23.3.18.1	Transmit spectrum mask	Spectrum emission mask	
23.3.18.2	Spectral flatness	Spectral flatness	
23.3.18.3	Transmit center frequency tolerance	Frequency error	
23.3.18.3	Transmit symbol clock tolerance	Symbol clock error	
23.3.18.4.2	Transmit center frequency leakage	I/Q origin offset	
23.3.18.4.3	Transmit constellation error (EVM rms)	RMS EVM	
23.3.18.4.4	Modulation accuracy test	Modulation analysis	

1. For the N/W9077A application, these values are found in the "numeric results" trace under the modulation analysis view. For 89601B with Option B7R and Option BHJ, these values are found under the "Syms/Errs" trace.
2. The standard describes the procedure for making this measurement, but doesn't specify test limits.

## Measurement Details

All of the RF transmitter measurements as defined in the IEEE standard, as well as a wide range of additional measurements and analysis tools, are available with the press of a button. These measurements are fully remote controllable via the IEC/IEEE bus or LAN, using SCPI commands. A detailed list of supported measurements is shown in Table 6.

Table 4. List of one-button measurements provided by the N/W9077A measurement application

Technology	IEEE 802.11b/g (DSSS/CCK/PBCC)	IEEE 802.11a/g (ERP-OFDM, DSSS- OFDM), 11p, 11j	IEEE 802.11n (20 MHz and 40 MHz)	IEEE 802.11ac (20/40/80/160, 80+80 MHz) <sup>1</sup> & 802.11af (6/7/8 MHz)	IEEE 802.11ah (1/2/4/8/16 MHz)
Modulation analysis					
RMS EVM	•	•	•	•	•
Peak EVM	•	•	•	•	•
Pilot EVM		•	•	•	•
Data EVM		•	•	•	•
1K chips EVM	•				
RMS magnitude error	•				
Peak magnitude error	•				
RMS phase error	•				
Peak phase error	•				
Frequency error	•	•	•	•	•
Chip clock error	•				
Symbol clock error		•	•	•	•
I/Q origin offset (CFL)	•	•	•	•	•
Quadrature skew	•	•	•	•	•
I/Q gain imbalance	•	•	•	•	•
Carrier suppression	•				
Average burst power	•	•	•	•	•
Peak burst power	•	•	•	•	•
Pk-to-avg power ratio	•	•	•	•	•
Modulation format	•	•	•	•	•
Bit rate	•	•	•	•	•
Preamble frequency error			•	•	•
OFDM data burst info			•	•	•
OFDM HT-sig info			•	•	•
Channel power	•	•	•	•	•
Occupied bandwidth	•	•	•	•	•
CCDF	•	•	•	•	•
Spectrum emission mask (SEM)	•	•	•	•	•
Spurious emissions	•	•	•	•	•
Power vs. time	•	•	•	•	•
Spectral flatness	•	•	•	•	•
Monitor spectrum	•	•	•	•	•
I/Q waveform	•	•	•	•	•

1. 802.11ac is not supported on the CXA.

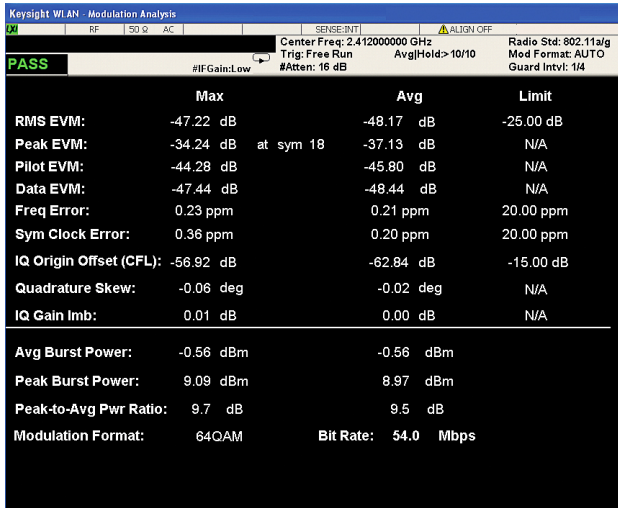


Figure 1. Numerical results summarize modulation accuracy parameters for WLAN signals.

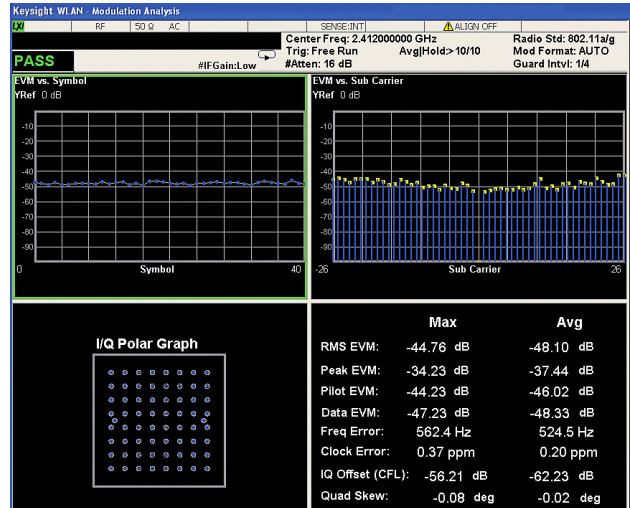


Figure 2. "OFDM EVM" displays four traces with EVM vs. symbol, EVM vs. subcarrier, constellation, and measurement results.

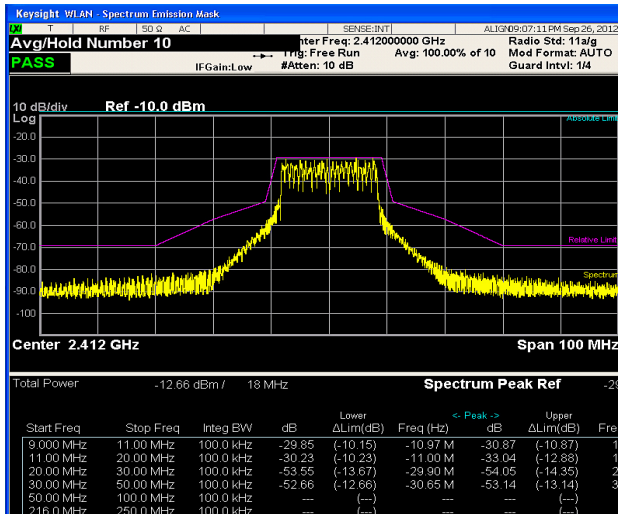


Figure 3. Transmit spectrum mask measurement showing IEEE defined limits.

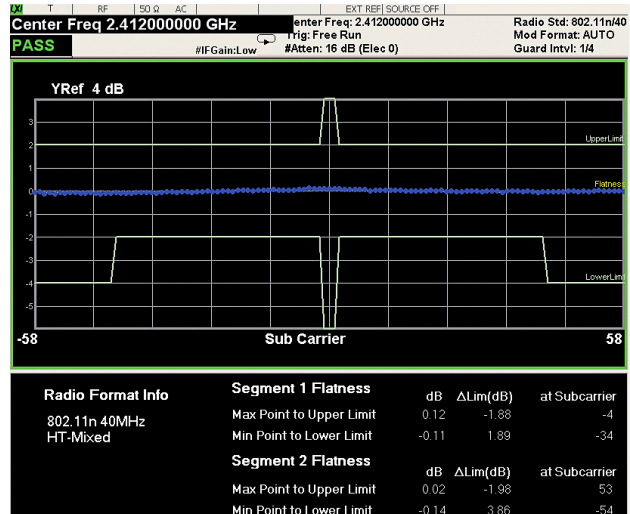


Figure 4. Spectrum flatness of a 40 MHz IEEE 802.11n signal (Greenfield mode).

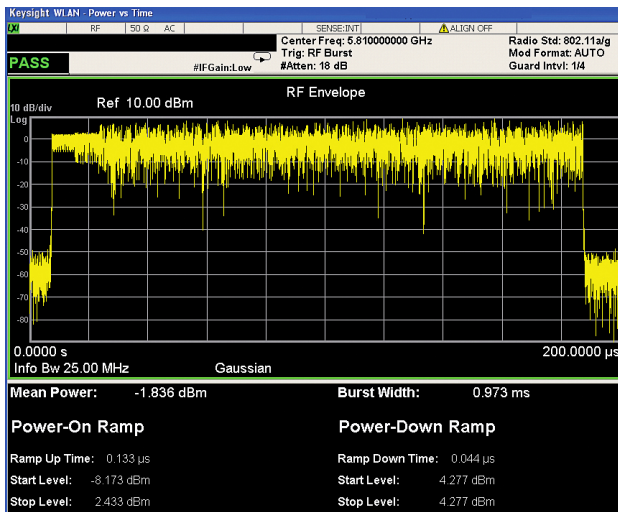


Figure 5. Time-domain view of an 802.11a burst.

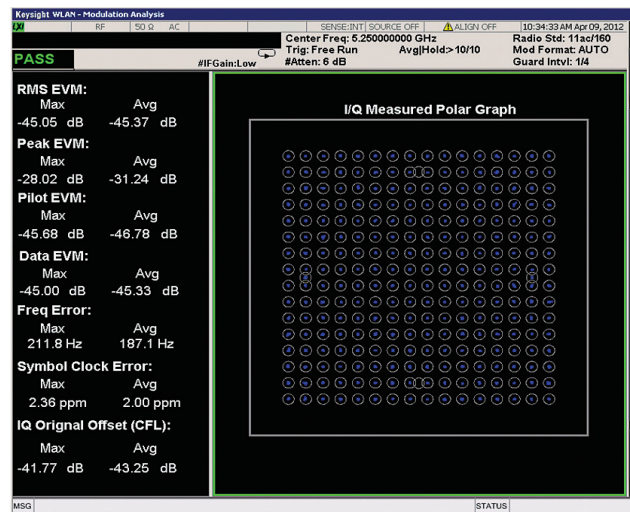


Figure 6. Modulation analysis of a 160 MHz 802.11ac signal with MCS 9 256QAM signal.

## Key Specifications

This section contains specifications for the N/W9077A WLAN 802.11 measurement applications. The specifications below are limited to modulation accuracy, channel power, power versus time, and spectrum emission mask measurements.

### Definitions

- Specifications describe the performance of parameters covered by the product warranty.
- 95th percentile values indicate the breadth of the population ( $\approx 2\sigma$ ) of performance tolerances expected to be met in 95% of cases with a 95% confidence. These values are not covered by the product warranty.
- Typical values are designated with the abbreviation “typ.” These are performance beyond specification that 80% of the units exhibit with a 95% confidence. These values are not covered by the product warranty.
- Nominal values are designated with the abbreviation “nom.”
- These values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered by the product warranty.

Note: Data subject to change

## Supported devices and standards

Device type	
Standard version	802.11a, 802.11g ERP-OFDM, 802.11g DSSS-OFDM, 802.11b/g DSSS/CCK/PBCC, 802.11j, 802.11p, 802.11-a turbo mode
	802.11n (20 MHz, 40 MHz) HT Mixed, HT Greenfield, Non-HT, MCS = 0-7
	802.11ac 20/40/80/160 MHz, 80+80 MHz, MCS=0-9
	802.11af 6/7/8 MHz
	802.11ah 1/2/4/8/16MHz, MCS0-10
Modulation formats	BPSK, QPSK, 16QAM, 64QAM, 256QAM

For a complete list of specifications refer to the appropriate specifications guide.

Benchtop:

PXA: [www.keysight.com/find/pxa\\_specifications](http://www.keysight.com/find/pxa_specifications)

MXA: [www.keysight.com/find/mxa\\_specifications](http://www.keysight.com/find/mxa_specifications)

EXA: [www.keysight.com/find/exa\\_specifications](http://www.keysight.com/find/exa_specifications)

CXA: [www.keysight.com/find/cxa\\_specifications](http://www.keysight.com/find/cxa_specifications)

PXIe:

VXT: [www.keysight.com/find/vxt](http://www.keysight.com/find/vxt)

CXA-m: [www.keysight.com/find/cxa-m](http://www.keysight.com/find/cxa-m)

## Key Specifications

Description	PXA (N9030A)	MXA (N9020A)	EXA (N9010A)	CXA (N9000A)
Supported standards	802.11a, 802.11g ERP-OFDM, 802.11g DSSS-OFDM, 802.11b/g DSSS/CCK/PBCC, 802.11j, 802.11p, 802.11-a turbe mode			
	802.11n (20 MHz <sup>5</sup> , 40 MHz <sup>6</sup> ) HT Mixed, HT Greenfield, Non-HT, MCS=0-7			
	802.11ac 205/406/807/1608 MHz, 80+80 MHz <sup>7</sup> , MCS=0-9			
	802.11af 6/7/8 MHz			
	802.11ah 1/2/4/8/16MHz, MCS0-10			
Modulation formats	BPSK, QPSK, 16QAM, 64QAM, 256QAM			
<b>Modulation accuracy (nominal)</b>				
<b>Center frequency in 2.4 GHz band <sup>1</sup></b>				
<b>802.11a/g/j/p (OFDM), 802.11g (DSSS-OFDM), 802.11n (20 MHz); Code rate: 3/4;</b>				
<b>Equalizer training = channel est. seq. only, Track phase: On; RF input level = -10 dBm, Attenuation = 10 dB</b>				
EVM floor	-53 dB (0.23%)	-52 dB (0.25%) <sup>9</sup>	-49 dB (0.36%)	-44 dB (0.63%)
<b>802.11n (40 MHz); Code rate: 3/4; Equalizer training = channel est. seq. only,</b>				
<b>Track phase: On; RF input level = -10 dBm, Attenuation = 10 dB</b>				
EVM floor	-50 dB (0.32%)	-50 dB (0.32%) <sup>9</sup>	-46 dB (0.47%)	Not Applicable <sup>3</sup>
<b>Center frequency in 5.0 GHz band <sup>2</sup></b>				
<b>802.11a/g/j/p (OFDM), 802.11n (20 MHz), 802.11ac (20 MHz); Code rate: 3/4;</b>				
<b>Equalizer training = channel est. seq. only, Track phase: On; RF input level = -10 dBm, Attenuation = 10 dB</b>				
EVM floor	-50 dB (0.29%)	-49 dB (0.34%) <sup>8</sup>	-47 dB (0.45%)	-40 dB (0.95%)
<b>802.11n (40 MHz), 802.11ac (40 MHz); Code rate: 3/4;</b>				
<b>Equalizer training = channel est. seq. only, Track phase: On; RF input level = -10 dBm, Attenuation = 10 dB</b>				
EVM floor	-48 dB (0.40%)	-47 dB (0.42%) <sup>8</sup>	-45 dB (0.53%)	Not Applicable <sup>3</sup>
<b>802.11ac (80 MHz); Code rate: 3/4; Equalizer training = channel est. seq. only,</b>				
<b>Track phase: On; RF input level = -10 dBm, Attenuation = 6 dB</b>				
EVM floor	-47 dB (0.45%)	-46 dB (0.50%) <sup>9</sup>	Not Applicable <sup>3</sup>	Not Applicable <sup>3</sup>
<b>802.11ac (160 MHz); Code rate: 3/4; Equalizer training = channel est. seq. only,</b>				
<b>Track phase: On; RF input level = -10 dBm, Attenuation = 8 dB</b>				
EVM floor	-46 dB (0.50%)	-45 dB (0.56%) <sup>9</sup>	Not Applicable <sup>3</sup>	Not Applicable <sup>3</sup>
<b>802.11ah (1 MHz); Code Rate: 3/4; Equalizer training = channel est. seq only, Track phase:ON; RF input level = -10 dBm, Atten=10 dB</b>				
<b>Center frequency in Sub GHz band</b>				
EVM floor <sup>11</sup>	-58 dB (0.13%)	-54 dB (0.19%)	-53 dB (0.22%)	-46 dB (0.46%)
Accuracy (EVM range: 0 to 8%)	± 0.30%			
Frequency error accuracy	± 10 Hz+tfa <sup>10</sup>			
<b>802.11b/g (DSSS/CCK/PBCC); Reference filter: Gaussian; RF input level = -10 dBm, Attenuation = 10 dB</b>				
<b>Center frequency in 2.4 GHz band <sup>4</sup></b>				
EVM floor (Equalizer off)	-41 dB (0.80%)	-40 dB (1.00%)	-39 dB (1.03%)	-36 dB (1.49%)
EVM floor (Equalizer on)	-54 dB (0.20%)	-46 dB (0.50%)	-46 dB (0.50%)	-44 dB (0.60%)
Accuracy (EVM range: 0 to 2%)	± 0.90%			
Accuracy (EVM range: 2 to 20%)	± 0.40%			
Frequency error accuracy	± 10 Hz+tfa <sup>10</sup>			

- 2.4 GHz band for radio standard 802.11a/g (OFDM), 802.11 (DSSS-OFDM), 802.11n (20 MHz or 40 MHz) is applied channel center frequency = 2407 MHz + 5xk MHz (k = 1,...,13)
- 5.0 GHz band for radio standard 802.11a/g (OFDM), 802.11g (DSSS-OFDM), 802.11n (20 MHz or 40 MHz), 802.11ac (20 MHz, 40 MHz, 80 MHz, 160 MHz, 80 + 80 MHz) is applied channel center frequency = 5000 MHz + 5xk MHz (k = 0,1,2,...,200)
- The CXA with Option B25 can only support the bandwidth of 25 MHz. EXA with Option B40 can only support 40 MHz bandwidth.
- 2.4 GHz band for radio standard 802.11b/g (DSS/CCK/PBCC) is applied channel center frequency = 2407 MHz + 5xk MHz (k = 1,...,13)
- Requires N90x0A-B25 25 MHz analysis bandwidth option or higher
- Requires N90x0A-B40 40 MHz analysis bandwidth option or higher
- Requires N90x0A-B85 85 MHz analysis bandwidth option or higher
- Requires N90x0A-B1X 160 MHz analysis bandwidth option
- EVM specification for MXA is for instruments with serial number prefix ≥ MY/SG/US5233 (those instruments ship standard with N9020A-EP2 as the identifier). Refer to the WLAN chapter of the MAX specification guide for specification on the other MXA: [www.keysight.com/find/mxa\\_specifications](http://www.keysight.com/find/mxa_specifications). For MXA, phase noise optimization is set to fast tuning.
- tfa = transmitter frequency × frequency reference accuracy
- For this specification, MXA Serial Number should be later than MY/SG/US5233. EXA serial number should be above MY/SG/US5340.

## Key Specifications (continued)

Description	PXA (N9030A)	MXA (N9020A)	EXA (N9010A)	CXA (N9000A)
<b>Channel power</b>				
Minimum power at RF input	-50 dBm (nominal)			
<b>Center frequency in 2.4 GHz band</b>				
<b>802.11b/g (DSSS/CCK/PBCC); Integration bandwidth = 22 MHz</b>				
Absolute power accuracy	± 0.19 dB (95th percentile)	± 0.23 dB (95th percentile)	± 0.27 dB (95th percentile)	± 0.61 dB (95th percentile)
Measurement floor	-78.3 dBm (typical)	-76.3 dBm (typical)	-72.3 dBm (typical)	-71.3 dBm (typical)
<b>802.11a/g/j/p (OFDM), 802.11g (DSSS-OFDM), 802.11n (20 MHz), 802.11ac (20 MHz); Integration bandwidth = 20 MHz</b>				
Absolute power accuracy	± 0.19 dB (95th percentile)	± 0.23 dB (95th percentile)	± 0.27 dB (95th percentile)	± 0.61 dB (95th percentile)
Measurement floor	-78.7 dBm (typical)	-76.7 dBm (typical)	-72.7 dBm (typical)	-71.7 dBm (typical)
<b>802.11n (40 MHz), Integration bandwidth= 40 MHz</b>				
Absolute power accuracy	± 0.19 dB (95th percentile)	± 0.23 dB (95th percentile)	± 0.27 dB (95th percentile)	± 0.61 dB (95th percentile)
Measurement floor	-75.7 dBm (typical)	-73.7 dBm (typical)	-69.7 dBm (typical)	-68.7 dBm (typical)
<b>Center frequency in 5.0 GHz band</b>				
<b>802.11a/g/j/p (OFDM), 802.11n (20 MHz), 802.11ac (20 MHz); Integration bandwidth= 20 MHz</b>				
Absolute power accuracy	± 0.41 dB (95th percentile)	± 0.50 dB (95th percentile)	± 0.50 dB (95th percentile)	± 1.24 dB (95th percentile)
Measurement floor	-76.7 dBm (typical)	-76.7 dBm (typical)	-72.7 dBm (typical)	-64.7 dBm (typical)
<b>802.11n (40 MHz), 802.11ac (40 MHz); Integration bandwidth = 40 MHz</b>				
Absolute power accuracy	± 0.41 dB (95th percentile)	± 0.50 dB (95th percentile)	± 0.50 dB (95th percentile)	± 1.24 dB (95th percentile)
Measurement floor	-73.7 dBm (typical)	-73.7 dBm (typical)	-69.7 dBm (typical)	-61.7 dBm (typical)
<b>802.11ac (80 MHz); Integration bandwidth = 80 MHz</b>				
Absolute power accuracy	± 0.41 dB (95th percentile)	± 0.50 dB (95th percentile)	± 0.50 dB (95th percentile)	± 1.24 dB (95th percentile)
Measurement floor	-70.7 dBm (typical)	-70.7 dBm (typical)	-66.7 dBm (typical)	-58.7 dBm (typical)
<b>802.11ac (160 MHz); Integration bandwidth = 160 MHz</b>				
Absolute power accuracy	± 0.41 dB (95th percentile)	± 0.50 dB (95th percentile)	± 0.50 dB (95th percentile)	± 1.24 dB (95th percentile)
Measurement floor	-67.7 dBm (typical)	-67.7 dBm (typical)	-63.7 dBm (typical)	-55.7 dBm (typical)
<b>802.11ah (1MHz); Integration bandwidth = 1MHz</b>				
Absolute power accuracy	± 0.19 (95th percentile)	± 0.23 (95th percentile)	± 0.27 (95th percentile)	± 0.61 (95th percentile)
Measurement floor	-91.7 dBm (typical)	-89.7 dBm	-86.7 dBm	-84.7 dBm
<b>Power versus Time (nominal)</b>				
<b>802.11b/g (DSSS/CCK/PBCC)</b>				
<b>Center frequency in 2.4 GHz band</b>				
Measurement results type	Min, Max, Mean			
Measurement time	Up to 88 ms			
Dynamic range	64.0 dB	62.0 dB	58.0 dB	57.0 dB
<b>Spectrum emission mask</b>				
<b>802.11a/g/j/p (OFDM), 802.11g (DSSS-OFDM), 802.11n (20 MHz); Integration bandwidth = 18 MHz, RBW = 100.0 kHz, 11.0 MHz offset</b>				
<b>Center frequency in 2.4 GHz band</b>				
Dynamic range, relative	87.3 dB (typical)	84.3 dB (typical)	79.9 dB (typical)	79.8 dB (typical)
Sensitivity, absolute	-101.5 dBm (typical)	-99.5 dBm (typical)	-95.5 dBm (typical)	-94.5 dBm (typical)
Accuracy, relative	± 0.05 dB	± 0.12 dB	± 0.12 dB	± 0.12 dB
Accuracy, absolute	± 0.20 dB (95th percentile)	± 0.27 dB (95th percentile)	± 0.31 dB (95th percentile)	± 0.64 dB (95th percentile)
<b>802.11a/g (OFDM), 802.11n (20 MHz), 802.11ac (20 MHz); Integration bandwidth = 18 MHz, RBW = 100.0 kHz, 11.0 MHz offset</b>				
<b>Center frequency in 5.0 GHz band</b>				
Dynamic range, relative	85.3 dB (typical)	84.3 dB (typical)	79.9 dB (typical)	73.2 dB (typical)
Sensitivity, absolute	-99.5 dBm (typical)	-99.5 dBm (typical)	-95.5 dBm (typical)	-87.5 dBm (typical)
Accuracy, relative	± 0.05 dB	± 0.12 dB	± 0.12 dB	± 0.11 dB
Accuracy, absolute	± 0.41 dB (95th percentile)	± 0.54 dB (95th percentile)	± 0.54 dB (95th percentile)	± 1.28 dB (95th percentile)
<b>802.11n (40 MHz), 802.11ac (40 MHz) @ 5 GHz only; Integration bandwidth = 38 MHz, RBW = 100.0 kHz, 21.0 MHz offset</b>				
<b>Center frequency in 2.4 GHz band</b>				
Dynamic range, relative	87.3 dB (typical)	84.5 dB (typical)	80.2 dB (typical)	80.0 dB (typical)
Sensitivity, absolute	-101.5 dBm (typical)	-99.5 dBm (typical)	-95.5 dBm (typical)	-94.5 dBm (typical)
Accuracy, relative	± 0.05 dB	± 0.12 dB	± 0.12 dB	± 0.12 dB
Accuracy, absolute	± 0.20 dB (95th percentile)	± 0.27 dB (95th percentile)	± 0.31 dB (95th percentile)	± 0.64 dB (95th percentile)

## Key Specifications (continued)

Description	PXA (N9030A)	MXA (N9020A)	EXA (N9010A)	CXA (N9000A)
<b>Center frequency in 5.0 GHz band</b>				
Dynamic range, relative	85.4 dB (typical)	84.5 dB (typical)	80.2 dB (typical)	73.3. dB (typical)
Sensitivity, absolute	-99.5 dBm (typical)	-99.5 dBm (typical)	-95.5 dBm (typical)	-87.5 dBm (typical)
Accuracy, relative	± 0.05 dB	± 0.12 dB	± 0.12 dB	± 0.11 dB
Accuracy, absolute	± 0.41 dB (95th percentile)	± 0.54 dB (95th percentile)	± 0.54 dB (95th percentile)	± 1.28 dB (95th percentile)
<b>802.11b/g (DSSS/CCK/PBCC); Integration bandwidth = 22 MHz, RBW = 100.0 kHz, 11.0 MHz offset</b>				
<b>Center frequency in 2.4 GHz band</b>				
Dynamic range, relative	87.3 dB (typical)	84.3 dB (typical)	80.0 dB (typical)	79.9 dB (typical)
Sensitivity, absolute	-101.5 dBm (typical)	-99.5 dBm (typical)	-95.5 dBm (typical)	-94.5 dBm (typical)
Accuracy, relative	± 0.05 dB	± 0.12 dB	± 0.12 dB	± 0.12 dB
Accuracy, absolute	± 0.20 dB (95th percentile)	± 0.27 dB (95th percentile)	± 0.31 dB (95th percentile)	± 0.64 dB (95th percentile)
<b>802.11ac (80 MHz); Integration bandwidth = 78 MHz, RBW = 100.0 kHz, 41.0 MHz offset</b>				
<b>Center frequency in 5.0 GHz band</b>				
Dynamic range, relative	85.4 dB (typical)	84.6 dB (typical)	80.4 dB (typical)	73.4 dB (typical)
Sensitivity, absolute	-99.5 dBm (typical)	-99.5 dBm (typical)	-95.5 dBm (typical)	-87.5 dBm (typical)
Accuracy, relative	± 0.05 dB	± 0.12 dB	± 0.12 dB	± 0.11 dB
Accuracy, absolute	± 0.41 dB (95th percentile)	± 0.54 dB (95th percentile)	± 0.54 dB (95th percentile)	± 1.28 dB (95th percentile)
<b>802.11ac (160 MHz); Integration bandwidth = 158 MHz, RBW = 100.0 kHz, 81.0 MHz offset</b>				
<b>Center frequency in 5.0 GHz band</b>				
Dynamic range, relative	85.4 dB (typical)	84.7 dB (typical)	80.4 dB (typical)	73.4 dB (typical)
Sensitivity, absolute	-99.5 dBm (typical)	-99.5 dBm (typical)	-95.5 dBm (typical)	-87.5 dBm (typical)
Accuracy, relative	± 0.05 dB	± 0.12 dB	± 0.12 dB	± 0.11 dB
Accuracy, absolute	± 0.41 dB (95th percentile)	± 0.54 dB (95th percentile)	± 0.54 dB (95th percentile)	± 1.28 dB (95th percentile)
<b>802.11ah (1MHz); Integration bandwidth=0.9MHz,RBW=10.0 kHz,0.6MHz offset</b>				
<b>Center frequency in Sub GHz band</b>				
Dynamic range, relative	90.1 dB (typical)	89.9 dB (typical)	87.9 dB (typical)	78.7 dB (typical)
Sensitivity, absolute	-111.5 dBm (typical)	-109.5 dBm (typical)	-106.5 dBm (typical)	-104.5 dBm (typical)
Accuracy, relative	± 0.06 dB	± 0.13 dB	± 0.13 dB	± 0.14 dB
Accuracy, absolute	± 0.21 dB (95th percentile)	± 0.27 dB (95th percentile)	± 0.31 dB (95th percentile)	± 0.65 dB (95th percentile)

## Ordering Information

### Software licensing and configuration

Choose from two license types:

- Fixed, perpetual license:  
This allows you to run the application in the X-Series analyzer in which it is initially installed.
- Transportable, perpetual license:  
This allows you to run the application in the X-Series analyzer in which it is initially installed, plus it may be transferred from one X-Series analyzer to another.

#### You can upgrade!

Options can be added after your initial purchase.

All of our X-Series application options are license-key upgradeable.



The table below contains information on our fixed, perpetual licenses. For more information, please visit the product web pages.

### N/W9077A WLAN 802.11a/b/g/n/ac/af/ah X-Series measurement application

Description	Model-Option	Model-Option	Additional information
	PXA, MXA, EXA, CXA-m, VXT	CXA	
IEEE 802.11a/b/g/j/p	N9077A-2FP	W9077A-2FP	
IEEE 802.11n	N9077A-3FP	W9077A-3FP	Requires 2FP
IEEE 802.11ac	N9077A-4FP		Requires 2FP and 3FP
802.11ah	N9077A-6FP	W9077A-6FP	Requires firmware above version A.16.05
802.11af	N9077A-7FP	W9077A-7FP	Requires firmware above version A.18.01

## Hardware Configuration - Benchtop

### N9030A PXA signal analyzer

Description	Model-Option	Additional information
3.6, 8.4, 13.6, 26.5, 42.98, 44, 50 GHz frequency range	N9030A-503, -508, -513, -526, -543, -544, or -550	One required
Analysis bandwidth to 25, 40, 85 or 160 MHz	N9030A-B25, -B40, -B85 or -B1X	One required, based on bandwidth of WLAN signal under test
Precision frequency reference	N9030A-EA3	Recommended
Preamplifier, 3.6, 8.4, 13.6, 42.98, 44, 50 GHz	N9030A-P03, -P07, -P13, -P26, -P43, -P44, or -P50	One recommended
Microwave preselector bypass option	N9030A-MPB	Required for measurements > 3.6 GHz
Real-time spectrum analyzer capability, 85 or 160 MHz bandwidth analysis	N9030A-RT1 or RT2	One required for real-time analysis

### N9020A MXA signal analyzer

Description	Model-Option	Additional information
3.6, 8.4, 13.6, 26.5 GHz frequency range	N9020A-503, -508, -513, or -526	One required
Analysis bandwidth to 25, 40, 85, 125, or 160 MHz	N9020A-B25, -B40, -B85, -B1A, B1X	One required, based on bandwidth of WLAN signal under test
Electronic attenuator, 3.6 GHz	N9020A-EA3	Recommended
Preamplifier, 3.6, 8.4, 13.6, or 26.5 GHz	N9020A-P03, -P07, -P13, -P26	One recommended
Microwave preselector bypass option	N9020A-MPB	Required for measurements > 3.6 GHz
Real-time spectrum analyzer capability, 85 or 160 MHz bandwidth analysis	N9020A-RT1 or RT2	One required for real-time analysis

### N9010A EXA signal analyzer

Description	Model-Option	Additional information
3.6, 7.0, 13.6, 26.5, 32, or 44 GHz frequency range	N9010A-503, -507, -513, -526, -532, or -544	One required
Analysis bandwidth to 25 or 40 MHz	N9010A-B25 or B40	One required, based on bandwidth of WLAN signal under test
Preamplifier, 3.6, 7.0, 13.6, 26.5 GHz	N9010A-P03, -P07, -P13, -P26	One recommended
Microwave preselector bypass option	N9010A-MPB	Required for measurements > 3.6 GHz
Electronic attenuator, 3.6 GHz	N9010A-EA3	Recommended

### N9000A CXA signal analyzer

Description	Model-Option	Additional information
3.0, 7.5, 13.6, or 26.5 GHz frequency range	N9000A-503, -507, -513, or -526	One required
Analysis bandwidth to 25 MHz	N9000A-B25 <sup>1</sup>	Required
Preamplifier, 3.0, 7.5, 13.6, or 26.5 GHz	N9000A-P03, -P07, -P13, or -P26	One recommended

1. The maximum analysis bandwidth for CXA is 25 MHz, which allows the CXA to support 802.11a/b/g and 802.11n 20 MHz measurements.

## Hardware Configuration - PXIe

### M9420/21A PXIe VXT vector transceiver

Description	Model-Option	Additional information
3.8 or 6 GHz frequency range	M9420A/M9421A-504, or 506	One required
40, 80 or 160 MHz BW	M9420A/M9421A-B40/B80/B1X	One required
Half duplex port	M9420A/M9421A-HDX	Optional

### M9290A CXA-m PXIe signal analyzer

Description	Model-Option	Additional information
3, 7.5, 13.6 or 26.5 GHz frequency range	M9290A-F03, F07, F13, or F26	One required
25 MHz analysis BW	M9290A-B25	One required
Preamplifier, 3, 7.5, 13.6 or 26.5 GHz	M9290A-P03, P07, P13 or P26	One required
Fine resolution step attenuator	M9290A-FSA	Optional

## Related Literature

*RF Testing of Wireless Products, Application Note 1380-1*,  
literature number 5988-5411EN

*IEEE 802.11 Wireless LAN PHY Layer (RF) Operation and Measurement*,  
*Application note 1380-2*, literature number 5988-3762EN

*Testing New-generation Wireless LAN, Application note*,  
literature number 5990-8856EN

*Keysight MIMO Wireless LAN PHY Layer [RF] Operation & Measurement*,  
*Application note 1509*, literature number 5989-3443EN

## Web

Product page:

[www.keysight.com/find/N9077A](http://www.keysight.com/find/N9077A) and [www.keysight.com/find/W9077A](http://www.keysight.com/find/W9077A)

X-Series measurement applications:

[www.keysight.com/find/X-Series\\_Apps](http://www.keysight.com/find/X-Series_Apps)

X-Series signal analyzers:

[www.keysight.com/find/X-Series](http://www.keysight.com/find/X-Series)

Application pages:


[www.keysight.com/find/WLAN](http://www.keysight.com/find/WLAN)

Internet of Things pages:

[www.keysight.com/find/IoT](http://www.keysight.com/find/IoT)

## Evolving

Our unique combination of hardware, software, support, and people can help you reach your next breakthrough. **We are unlocking the future of technology.**

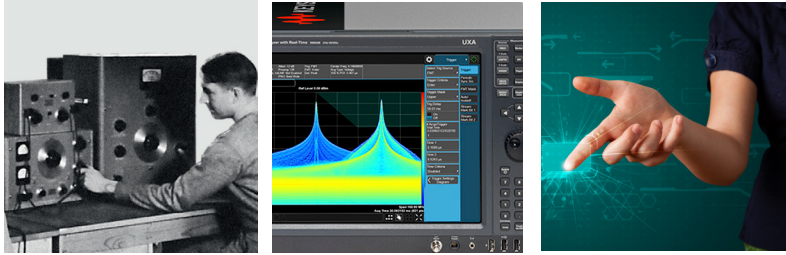

From Hewlett-Packard to Agilent to Keysight



### myKeysight

myKeysight

### myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

### Keysight Infoline

#### Keysight Infoline

[www.keysight.com/find/Infoline](http://www.keysight.com/find/Infoline)

Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

### KEYSIGHT SERVICES

#### Keysight Services

[www.keysight.com/find/services](http://www.keysight.com/find/services)

Our deep offering in design, test, and measurement services deploys an industry-leading array of people, processes, and tools. The result? We help you implement new technologies and engineer improved processes that lower costs.



#### Three-Year Warranty

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



#### Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

#### Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-06-08-16)



[www.keysight.com/go/quality](http://www.keysight.com/go/quality)  
Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2015  
Quality Management System



Unlocking Measurement Insights

This information is subject to change without notice.  
© Keysight Technologies, 2013 - 2016  
Published in USA, August 14, 2016  
5990-9642EN  
[www.keysight.com](http://www.keysight.com)