

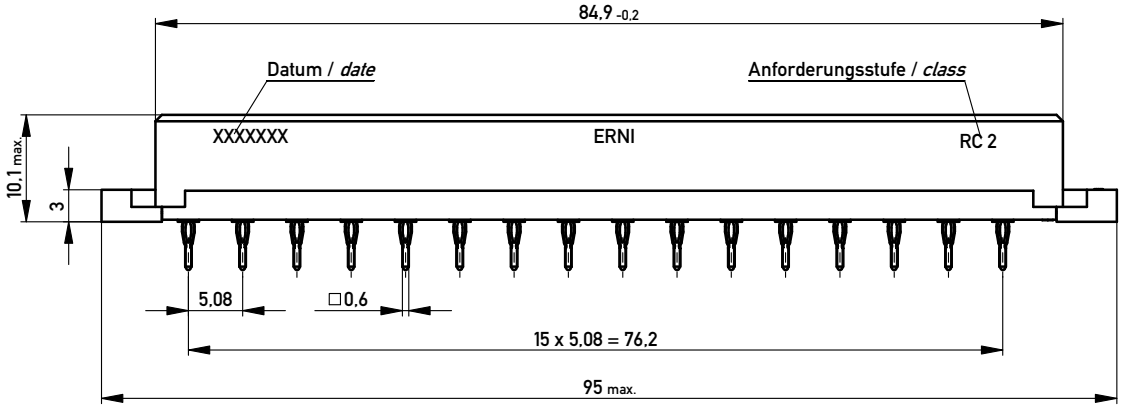





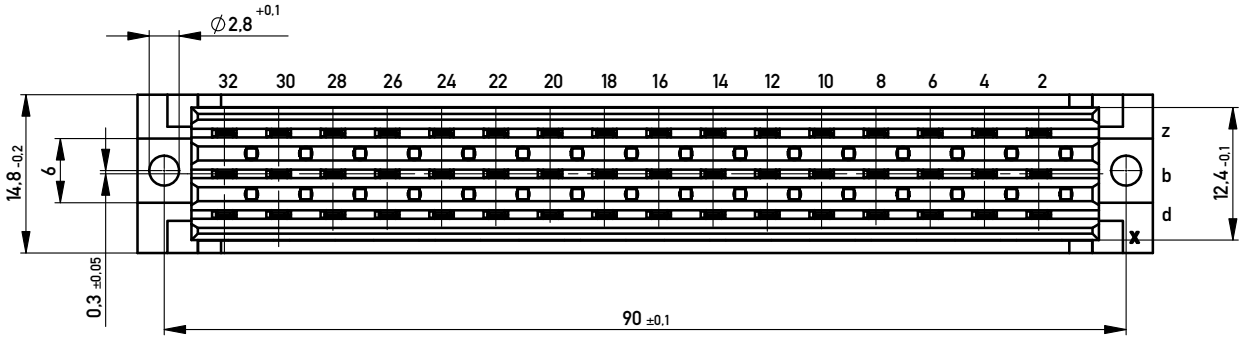


Elastische Einpresszone / *compliant pressfit zone*
Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2 = 400 mating cycles*
Bauart 7 / *type 7*
Lochaufbau siehe ERNI-Spezifikation 164062 / *hole design see ERNI-specification 164062*

1) $1{,}0\ ^{+0{,}09}_{-0{,}06}$ Durchmesser des metallisierten Loches
$1{,}0\ ^{+0{,}09}_{-0{,}06}$ Diameter of finished plated-through hole

Leiterplatten-Layout Vorschlag
PCB-Layout Proposal

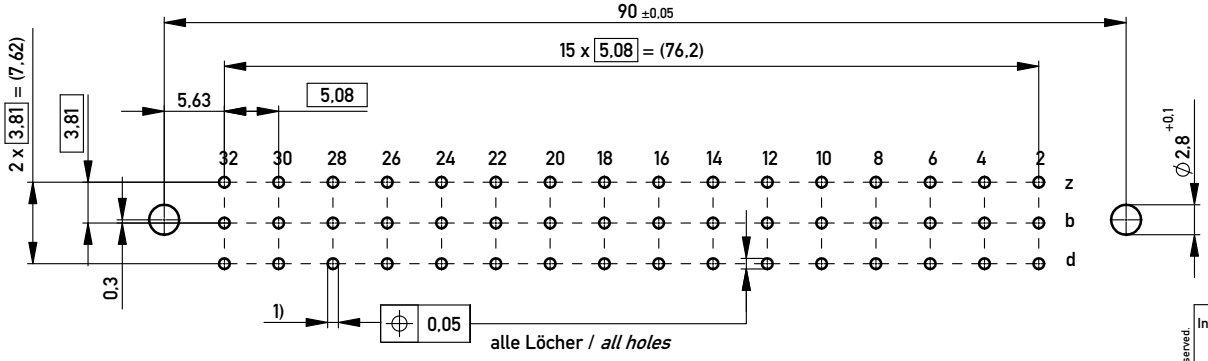

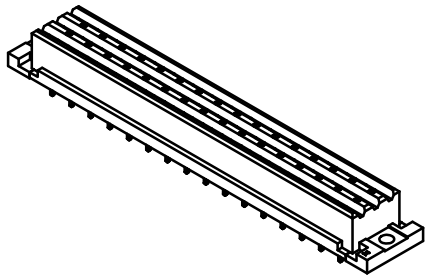

Fehlende Masse und Angaben nach DIN EN 60603-2 / *Missing information and dimensions according to DIN EN 60603-2*
Sonstige Angaben siehe Fertigungsunterlagen / *Additional indications please see the production documentation*

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:		Tolerances	All Dimensions in mm	Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	Federleiste F48 flach EE *Fem.Con. F48 flat Pressfit*
			ERNI www.ERNI.com	354746	I A3
a	08.08.2013			Class	STVF
Index	Date				