
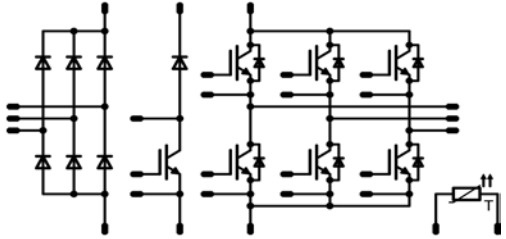


MiniSKiiP® 3 PIM	1200V/50A
<div style="border: 1px solid black; padding: 5px; margin-bottom: 5px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">Features</p> <ul style="list-style-type: none"> Solderless interconnection Mitsubishi Generation 6.1 technology </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 5px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">Target Applications</p> <ul style="list-style-type: none"> Industrial Motor Drives </div> <div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">Types</p> <ul style="list-style-type: none"> V23990-K428-A60-PM </div>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 5px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">MiniSKiiP® 3 housing</p>  </div> <div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">Schematic</p>  </div>

Maximum Ratings

$T_J=25^{\circ}\text{C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
D8,D9,D10,D11,D12,D13				
Repetitive peak reverse voltage	V_{RRM}		1600	V
DC forward current	I_{FAV}	$T_J=T_{Jmax}$ $T_h=80^{\circ}\text{C}$ $T_c=80^{\circ}\text{C}$	71 80	A
Surge forward current	I_{FSM}	$t_p=10\text{ms}$ $T_J=150^{\circ}\text{C}$	490	A
I ² t-value	I^2t		1200	A ² s
Power dissipation per Diode	P_{tot}	$T_J=T_{Jmax}$ $T_h=80^{\circ}\text{C}$ $T_c=80^{\circ}\text{C}$	77 117	W
Maximum Junction Temperature	T_{Jmax}		150	°C
T1,T2,T3,T4,T5,T6,T7				
Collector-emitter break down voltage	V_{CE}		1200	V
DC collector current	I_C	$T_J=T_{Jmax}$ $T_h=80^{\circ}\text{C}$ $T_c=80^{\circ}\text{C}$	55 70	A
Pulsed collector current	I_{Cpulse}	t_p limited by T_{Jmax}	100	A
Turn off safe operating area		$V_{CE} \leq 1200\text{V}$, $T_J \leq T_{op max}$	100	A
Power dissipation per IGBT	P_{tot}	$T_J=T_{Jmax}$ $T_h=80^{\circ}\text{C}$ $T_c=80^{\circ}\text{C}$	127 193	W
Gate-emitter peak voltage	V_{GE}		20	V
Short circuit ratings	t_{SC} V_{CC}	$T_J \leq 150^{\circ}\text{C}$ $V_{GE}=15\text{V}$	10 850	μs V
Maximum Junction Temperature	T_{Jmax}		175	°C

Maximum Ratings

 $T_j=25^{\circ}\text{C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit	
D1,D2,D3,D4,D5,D6,D7					
Peak Repetitive Reverse Voltage	V_{RRM}		1200	V	
DC forward current	I_F	$T_j=T_{jmax}$	$T_h=80^{\circ}\text{C}$	47	A
			$T_c=80^{\circ}\text{C}$	55	
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	100	A	
Power dissipation per Diode	P_{tot}	$T_j=T_{jmax}$	$T_h=80^{\circ}\text{C}$	102	W
			$T_c=80^{\circ}\text{C}$	154	
Maximum Junction Temperature	T_{jmax}		175	$^{\circ}\text{C}$	

Thermal Properties

Storage temperature	T_{stg}		-40...+125	$^{\circ}\text{C}$
Operation temperature under switching condition	T_{op}		-40...+($T_{jmax} - 25$)	$^{\circ}\text{C}$

Insulation Properties

Insulation voltage	V_{is}	$t=2\text{s}$ DC voltage	4000	V
Creepage distance			min 12,7	mm
Clearance			min 12,7	mm
Comparative tracking index	CTI		>200	

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		V_{GE} [V] or V_{GS} [V]	V_r [V] or V_{CE} [V] or V_{DS} [V]	I_C [A] or I_F [A] or I_D [A]	T_j	Min	Typ	Max		
D8,D9,D10,D11,D12,D13										
Forward voltage	V_F			50	$T_j=25^\circ\text{C}$ $T_j=125^\circ\text{C}$	1	1,09 1,02	1,8		V
Threshold voltage (for power loss calc. only)	V_{to}			50	$T_j=25^\circ\text{C}$ $T_j=125^\circ\text{C}$		0,90 0,74			V
Slope resistance (for power loss calc. only)	r_t			50	$T_j=25^\circ\text{C}$ $T_j=^\circ\text{C}$		4,00 6,00			m Ω
Reverse current	I_r		1600		$T_j=25^\circ\text{C}$ $T_j=145^\circ\text{C}$			1,1		mA
Thermal resistance chip to heatsink per chip	$R_{th,JH}$	Thermal grease thickness \leq 50um $\lambda = 1$ W/mK					0,90			K/W

T1,T2,T3,T4,T5,T6,T7

Gate emitter threshold voltage	$V_{GE(th)}$	$V_{CE}=V_{GE}$			0,005	$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$	5,4	6	6,6	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		50	$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$	1	1,79 2,12	2,3	V
Collector-emitter cut-off current incl. Diode	I_{CES}		0	1200		$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$			0,25	mA
Gate-emitter leakage current	I_{GES}		20	0		$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$			500	nA
Integrated Gate resistor	R_{gint}							none		Ω
Turn-on delay time	$t_{d(on)}$	$R_{goff}=16 \Omega$ $R_{gon}=16 \Omega$	± 15	600	50	$T_j=25^\circ\text{C}$		106		ns
Rise time	t_r					$T_j=150^\circ\text{C}$				
Turn-off delay time	$t_{d(off)}$					$T_j=25^\circ\text{C}$				
Fall time	t_f					$T_j=150^\circ\text{C}$				
Turn-on energy loss per pulse	E_{on}					$T_j=25^\circ\text{C}$				
Turn-off energy loss per pulse	E_{off}					$T_j=150^\circ\text{C}$				
Input capacitance	C_{ies}							5000		pF
Output capacitance	C_{oss}	f=1MHz	0	10		$T_j=25^\circ\text{C}$		1000		
Reverse transfer capacitance	C_{rss}							80		
Gate charge	Q_{Gate}		± 15	600	50	$T_j=25^\circ\text{C}$		117		nC
Thermal resistance chip to heatsink per chip	$R_{th,JH}$	Thermal grease thickness \leq 50um $\lambda = 1$ W/mK						0,75		K/W

D1,D2,D3,D4,D5,D6,D7

Diode forward voltage	V_F				50	$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$	1	2,73 2,18	3,4	V
Peak reverse recovery current	I_{RRM}	$R_{gon}=16 \Omega$	± 15	600	50	$T_j=25^\circ\text{C}$		33		A
Reverse recovery time	t_{rr}					$T_j=150^\circ\text{C}$				
Reverse recovered charge	Q_{rr}					$T_j=25^\circ\text{C}$				
Peak rate of fall of recovery current	$di(rec)/dt$					$T_j=150^\circ\text{C}$				
Reverse recovered energy	E_{rec}					$T_j=25^\circ\text{C}$				
						$T_j=150^\circ\text{C}$				
Thermal resistance chip to heatsink per chip	$R_{th,JH}$	Thermal grease thickness \leq 50um $\lambda = 1$ W/mK						0,93		K/W

Thermistor

Rated resistance	R					$T=25^\circ\text{C}$		1000		Ω
Deviation of R100	$\Delta R/R$	$R_{100}=1670 \Omega$				$T=100^\circ\text{C}$	-3		3	%
Power dissipation	P					$T=100^\circ\text{C}$		1670		Ω
Power dissipation constant						$T=25^\circ\text{C}$				mW/K
B-value	$B_{(25/50)}$					$T=25^\circ\text{C}$		$7,635 \cdot 10^{-3}$		1/K
B-value	$B_{(25/100)}$					$T=25^\circ\text{C}$		$1,731 \cdot 10^{-5}$		1/K ²
Vincotech NTC Reference									E	

T1,T2,T3,T4,T5,T6,T7 / D1,D2,D3,D4,D5,D6,D7
Figure 1 T1,T2,T3,T4,T5,T6,T7 IGBT

Typical output characteristics

$I_C = f(V_{CE})$

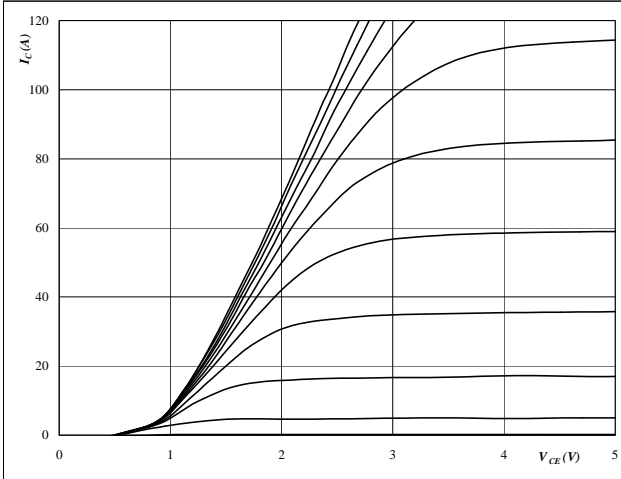

At
 $t_p = 250 \mu s$
 $T_j = 25 \text{ } ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

Figure 2 T1,T2,T3,T4,T5,T6,T7 IGBT

Typical output characteristics

$I_C = f(V_{CE})$

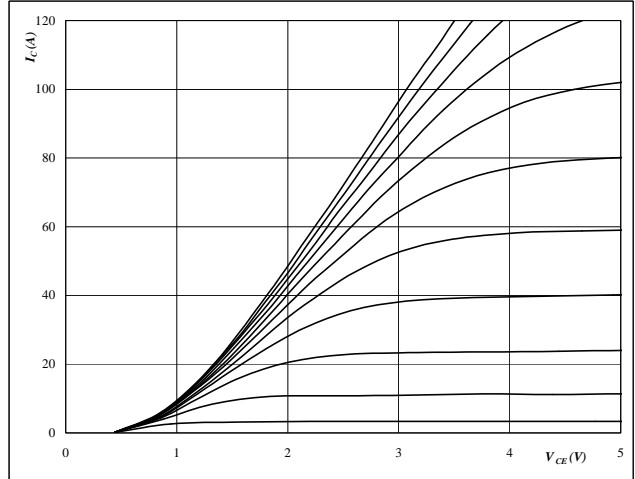
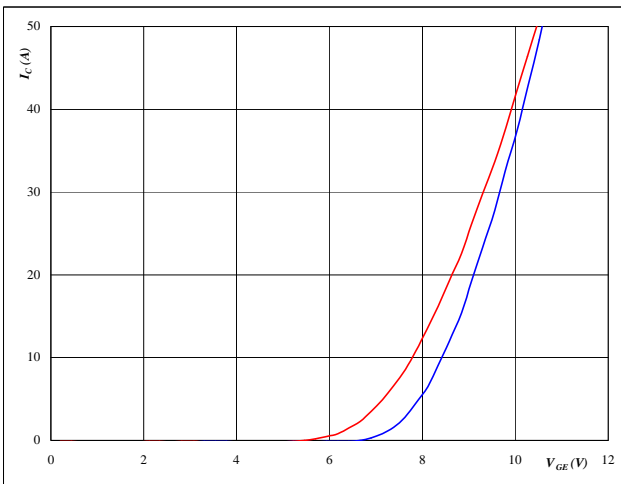

At
 $t_p = 250 \mu s$
 $T_j = 151 \text{ } ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

Figure 3 T1,T2,T3,T4,T5,T6,T7 IGBT


Typical transfer characteristics

$I_C = f(V_{GE})$


At
 $T_j = 25/150 \text{ } ^\circ C$
 $t_p = 250 \mu s$
 $V_{CE} = 10 \text{ V}$
Figure 4 D1,D2,D3,D4,D5,D6,D7 FWD

Typical diode forward current as a function of forward voltage


$I_F = f(V_F)$

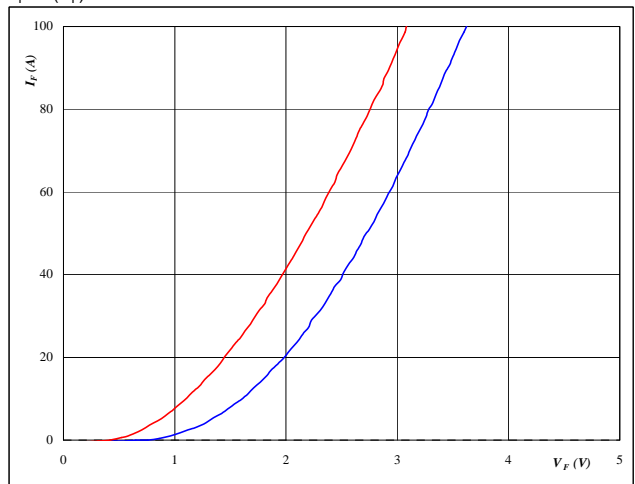
At
 $T_j = 25/150 \text{ } ^\circ C$
 $t_p = 250 \mu s$

T1,T2,T3,T4,T5,T6,T7 / D1,D2,D3,D4,D5,D6,D7
Figure 5 T1,T2,T3,T4,T5,T6,T7 IGBT

**Typical switching energy losses
as a function of collector current**

$E = f(I_C)$

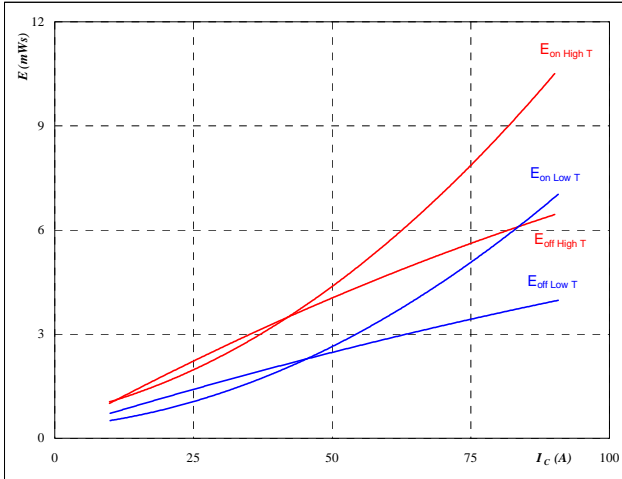


With an inductive load at

$T_J = 25/150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω
 $R_{goff} = 16$ Ω

Figure 6 T1,T2,T3,T4,T5,T6,T7 IGBT

**Typical switching energy losses
as a function of gate resistor**

$E = f(R_G)$

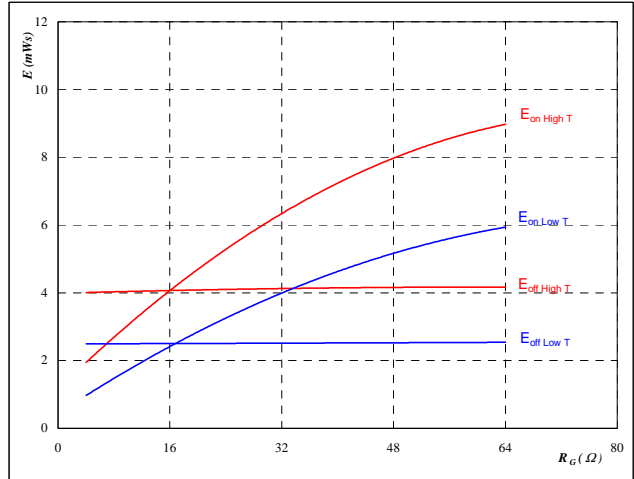


With an inductive load at

$T_J = 25/150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 50$ A

Figure 7 D1,D2,D3,D4,D5,D6,D7 FWD

**Typical reverse recovery energy loss
as a function of collector current**

$E_{rec} = f(I_C)$

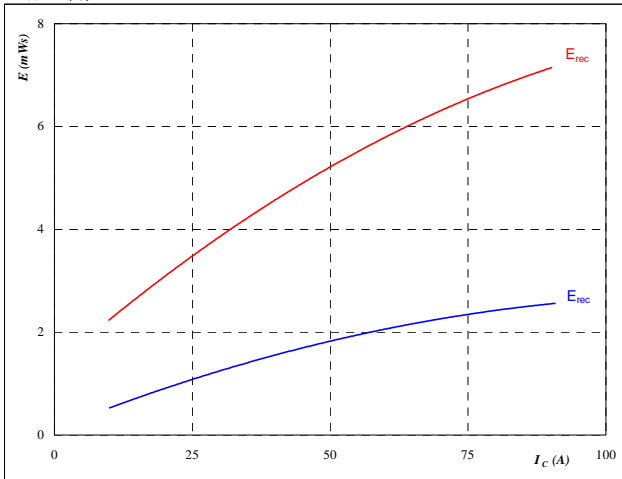


With an inductive load at

$T_J = 25/150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω

Figure 8 D1,D2,D3,D4,D5,D6,D7 FWD

**Typical reverse recovery energy loss
as a function of gate resistor**

$E_{rec} = f(R_G)$

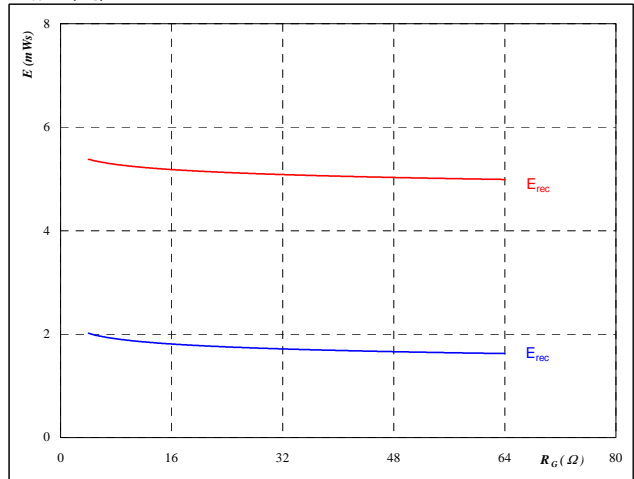


With an inductive load at

$T_J = 25/150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 50$ A

T1,T2,T3,T4,T5,T6,T7 / D1,D2,D3,D4,D5,D6,D7
Figure 9 T1,T2,T3,T4,T5,T6,T7 IGBT

Typical switching times as a function of collector current

$t = f(I_C)$

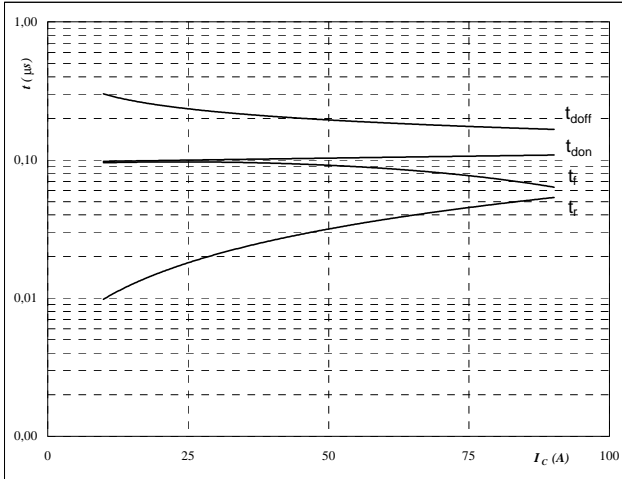


With an inductive load at

$T_J =$	151	$^{\circ}C$
$V_{CE} =$	600	V
$V_{GE} =$	± 15	V
$R_{gon} =$	16	Ω
$R_{goff} =$	16	Ω

Figure 10 T1,T2,T3,T4,T5,T6,T7 IGBT

Typical switching times as a function of gate resistor

$t = f(R_G)$

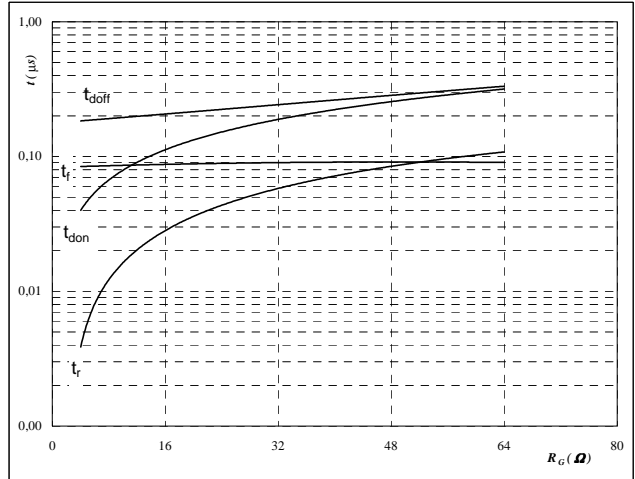


With an inductive load at

$T_J =$	151	$^{\circ}C$
$V_{CE} =$	600	V
$V_{GE} =$	± 15	V
$I_C =$	50	A

Figure 11 D1,D2,D3,D4,D5,D6,D7 FWD

Typical reverse recovery time as a function of collector current

$t_{rr} = f(I_C)$

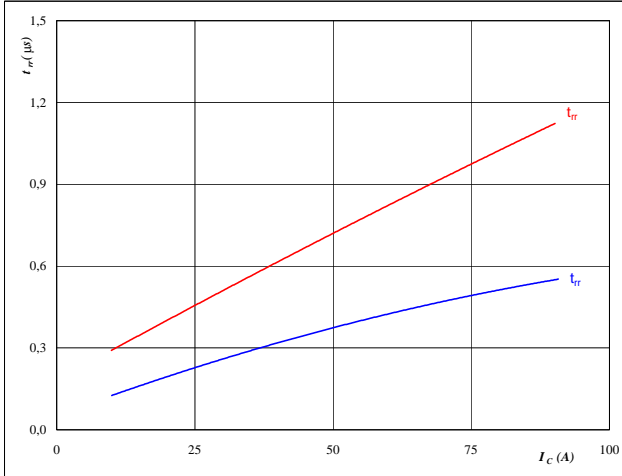

At

$T_J =$	25/150	$^{\circ}C$
$V_{CE} =$	600	V
$V_{GE} =$	± 15	V
$R_{gon} =$	16	Ω

Figure 12 D1,D2,D3,D4,D5,D6,D7 FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor

$t_{rr} = f(R_{gon})$

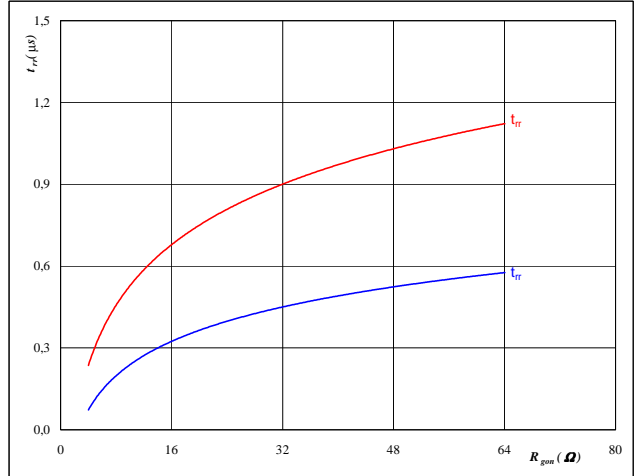
At

$T_J =$	25/150	$^{\circ}C$
$V_R =$	600	V
$I_F =$	50	A
$V_{GE} =$	± 15	V

T1,T2,T3,T4,T5,T6,T7 / D1,D2,D3,D4,D5,D6,D7
Figure 13 D1,D2,D3,D4,D5,D6,D7 FWD

Typical reverse recovery charge as a function of collector current

$Q_{rr} = f(I_C)$

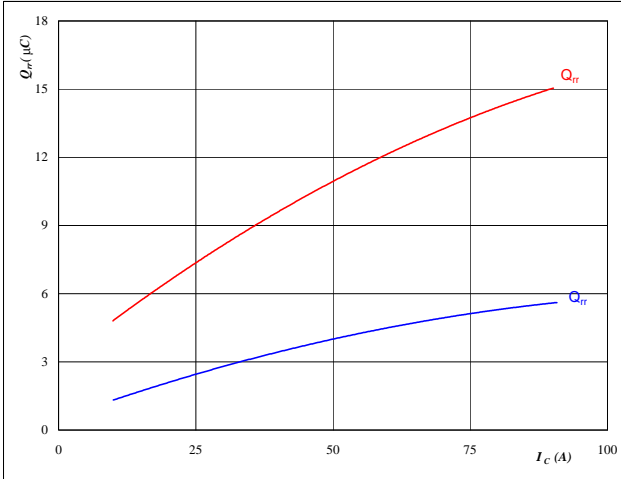

At
 $T_j = 25/150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω

Figure 14 D1,D2,D3,D4,D5,D6,D7 FWD

Typical reverse recovery charge as a function of IGBT turn on gate resistor

$Q_{rr} = f(R_{gon})$

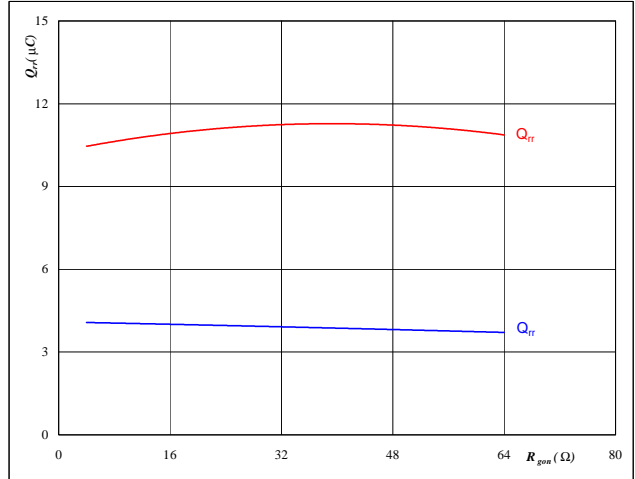

At
 $T_j = 25/150$ °C
 $V_R = 600$ V
 $I_F = 50$ A
 $V_{GE} = \pm 15$ V

Figure 15 D1,D2,D3,D4,D5,D6,D7 FWD

Typical reverse recovery current as a function of collector current

$I_{RRM} = f(I_C)$

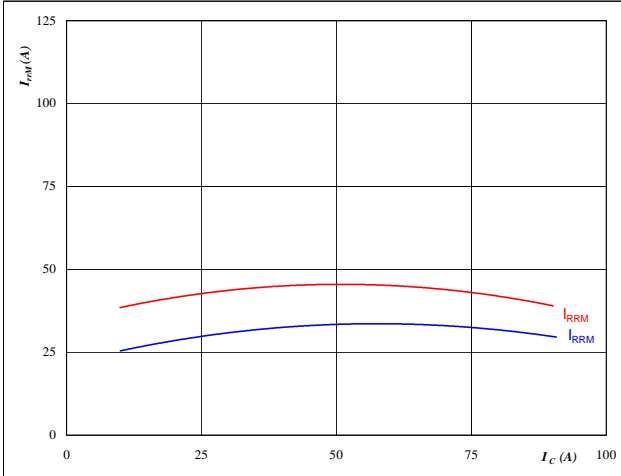
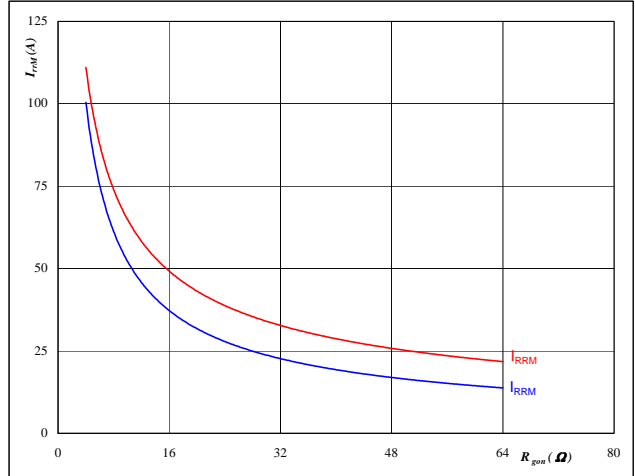

At
 $T_j = 25/150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω

Figure 16 D1,D2,D3,D4,D5,D6,D7 FWD

Typical reverse recovery current as a function of IGBT turn on gate resistor

$I_{RRM} = f(R_{gon})$



At
 $T_j = 25/150$ °C
 $V_R = 600$ V
 $I_F = 50$ A
 $V_{GE} = \pm 15$ V

T1,T2,T3,T4,T5,T6,T7 / D1,D2,D3,D4,D5,D6,D7

Figure 17 D1,D2,D3,D4,D5,D6,D7 FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current

$di_o/dt, di_{rec}/dt = f(I_C)$

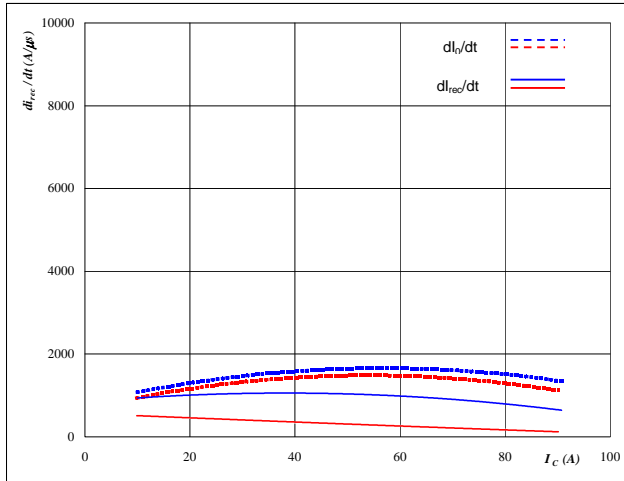


At
 $T_j = 25/150 \text{ } ^\circ\text{C}$
 $V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 16 \text{ } \Omega$

Figure 18 D1,D2,D3,D4,D5,D6,D7 FWD

Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor

$di_o/dt, di_{rec}/dt = f(R_{gon})$

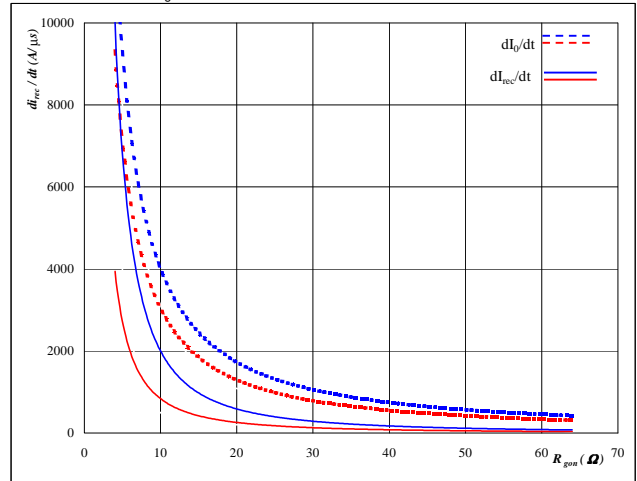


At
 $T_j = 25/150 \text{ } ^\circ\text{C}$
 $V_R = 600 \text{ V}$
 $I_F = 50 \text{ A}$
 $V_{GE} = \pm 15 \text{ V}$

Figure 19 T1,T2,T3,T4,T5,T6,T7 IGBT

IGBT transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

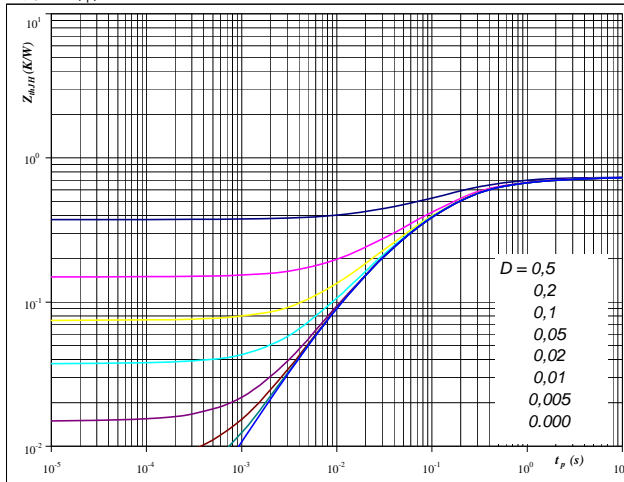

At
 $D = t_p / T$
 $R_{thJH} = 0,75 \text{ K/W}$


IGBT thermal model values

Thermal grease	
R (C/W)	Tau (s)
0,03	1,6E+01
0,09	1,2E+00
0,29	2,1E-01
0,24	7,1E-02
0,09	1,5E-02

Figure 20 D1,D2,D3,D4,D5,D6,D7 FWD

FWD transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

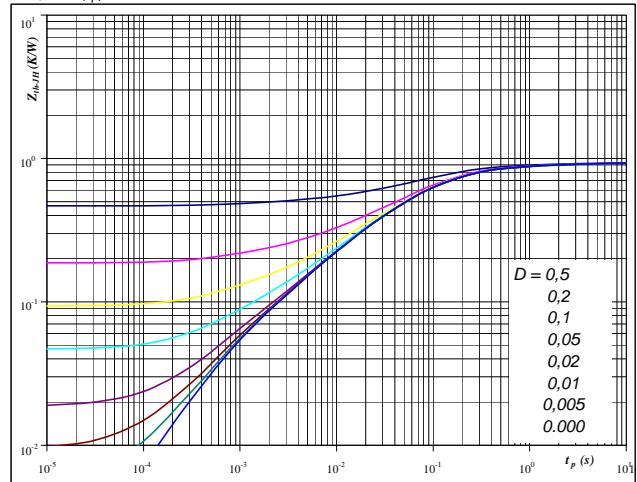

At
 $D = t_p / T$
 $R_{thJH} = 0,93 \text{ K/W}$


FWD thermal model values

Thermal grease	
R (C/W)	Tau (s)
0,05	3,4E+00
0,10	5,9E-01
0,37	1,2E-01
0,25	3,7E-02
0,13	8,1E-03
0,04	9,0E-04

T1,T2,T3,T4,T5,T6,T7 / D1,D2,D3,D4,D5,D6,D7
Figure 21 T1,T2,T3,T4,T5,T6,T7 IGBT


Power dissipation as a function of heatsink temperature

$$P_{tot} = f(T_h)$$

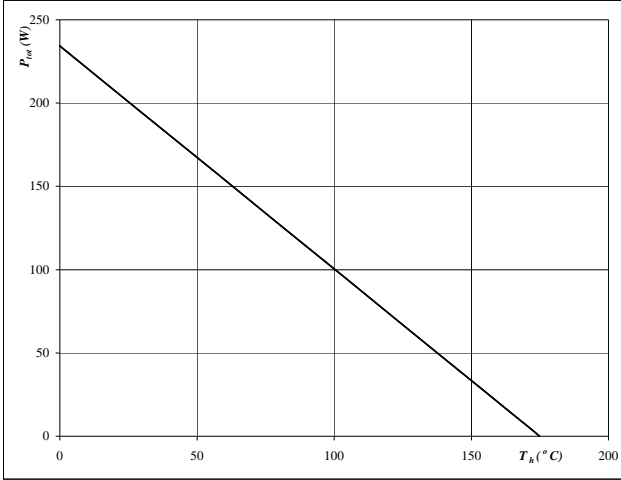
At
 $T_j = 175 \text{ } ^\circ\text{C}$
Figure 22 T1,T2,T3,T4,T5,T6,T7 IGBT


Collector current as a function of heatsink temperature

$$I_C = f(T_h)$$

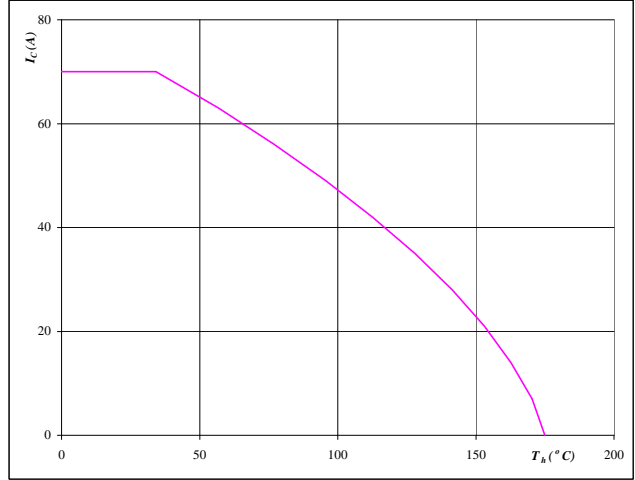
At
 $T_j = 175 \text{ } ^\circ\text{C}$
 $V_{GE} = 15 \text{ V}$
Figure 23 D1,D2,D3,D4,D5,D6,D7 FWD


Power dissipation as a function of heatsink temperature

$$P_{tot} = f(T_h)$$

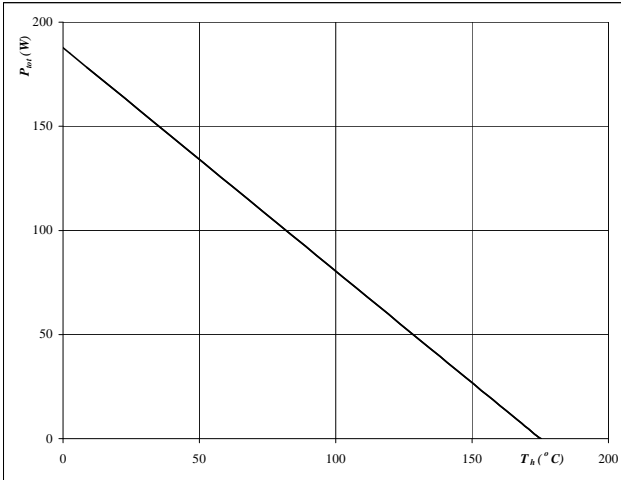
At
 $T_j = 175 \text{ } ^\circ\text{C}$
Figure 24 D1,D2,D3,D4,D5,D6,D7 FWD

Forward current as a function of heatsink temperature


$$I_F = f(T_h)$$

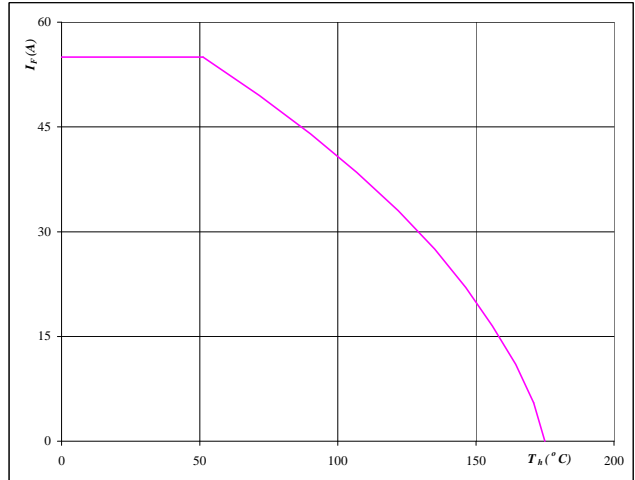
At
 $T_j = 175 \text{ } ^\circ\text{C}$

T1,T2,T3,T4,T5,T6,T7 / D1,D2,D3,D4,D5,D6,D7

Figure 25 T1,T2,T3,T4,T5,T6,T7 IGBT


Safe operating area as a function of collector-emitter voltage
 $I_C = f(V_{CE})$

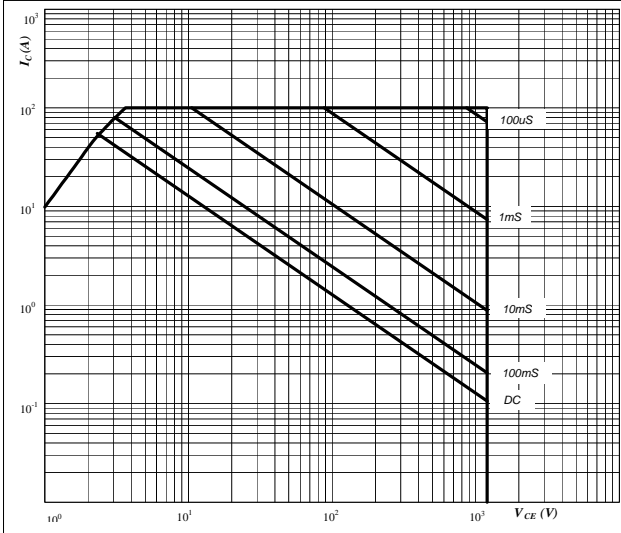

At
 D = single pulse
 $T_h = 80$ °C
 $V_{GE} = \pm 15$ V
 $T_j = T_{jmax}$ °C

Figure 26 T1,T2,T3,T4,T5,T6,T7 IGBT


Gate voltage vs Gate charge

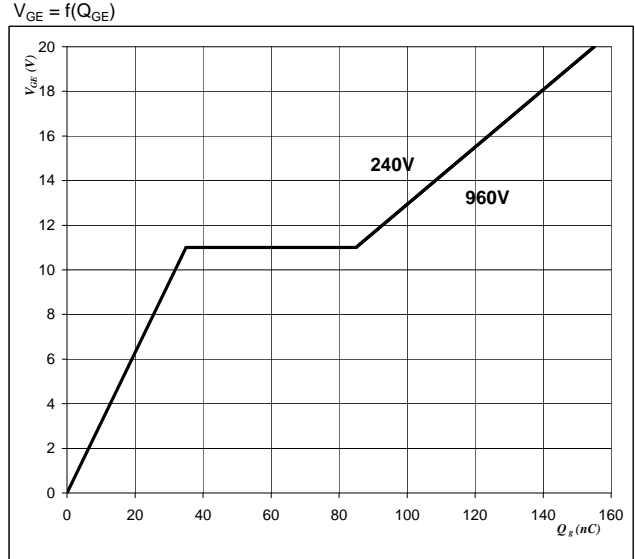

At
 $I_C = 50$ A

Figure 27 T1,T2,T3,T4,T5,T6,T7 IGBT


Short circuit safe operating area (SCSOA)

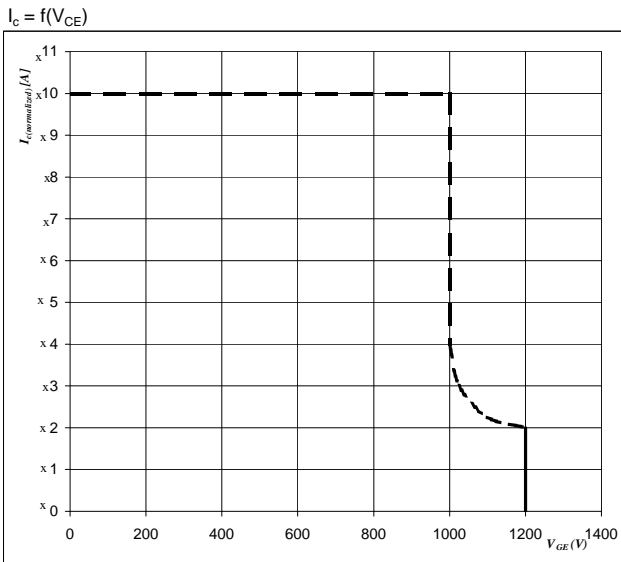

At
 $V_{CE} \leq 850$ V
 $T_j \leq 150$ °C
 $V_{GE} = \pm 15$ V
 $t_{sc} \leq 10$ µS


Figure 28 T1,T2,T3,T4,T5,T6,T7 IGBT

Typical short circuit collector current as a function of gate-emitter voltage

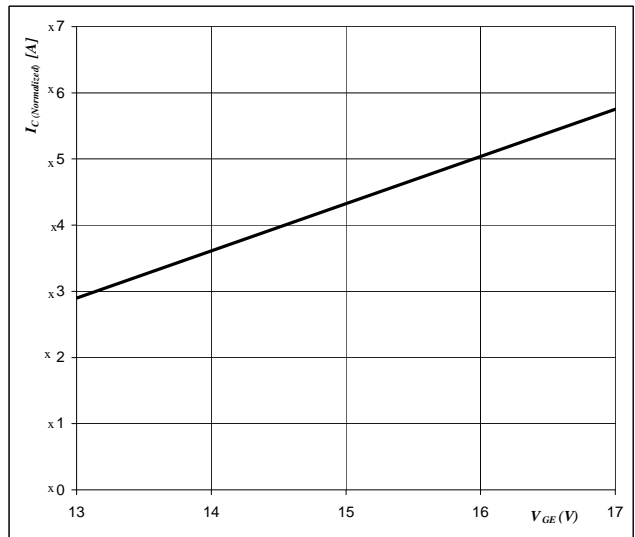

At
 $V_{CE} = 800$ V
 $T_j = 150$ °C

Figure 28 T1,T2,T3,T4,T5,T6,T7 IGBT

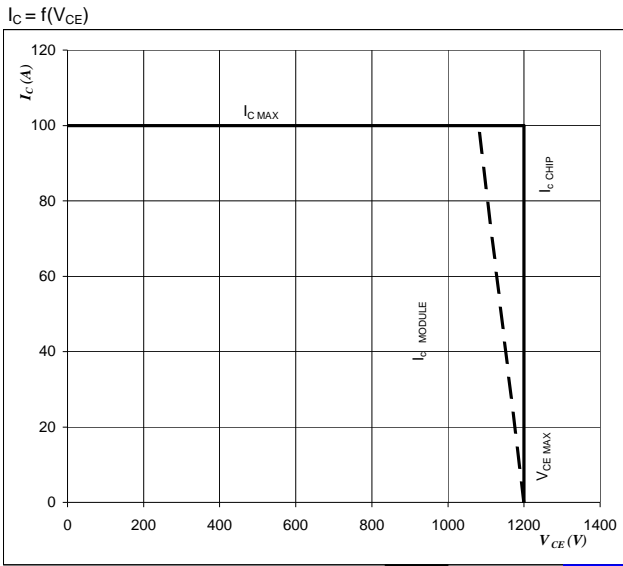Reverse bias safe operating area

At

$$T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$$

$$U_{ocmin} = U_{ocplus}$$


Switching mode : 3phase SPWM

D8,D9,D10,D11,D12,D13

Figure 1 D8,D9,D10,D11,D12,D13 diode

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

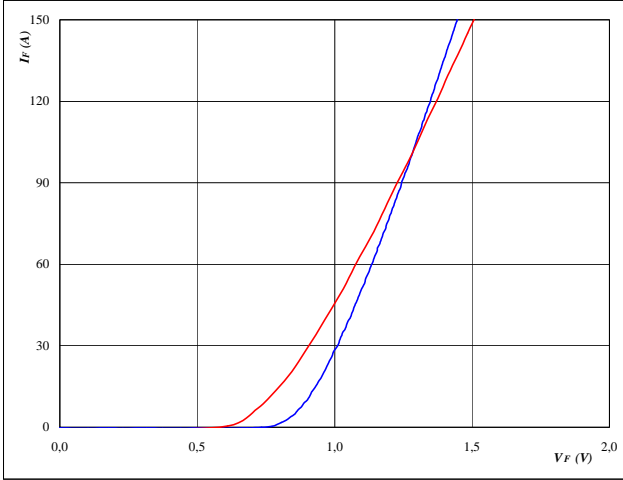


At
 $T_j = 25/125 \text{ } ^\circ\text{C}$
 $t_p = 250 \text{ } \mu\text{s}$

Figure 2 D8,D9,D10,D11,D12,D13 diode

Diode transient thermal impedance as a function of pulse width

$Z_{thJH} = f(t_p)$

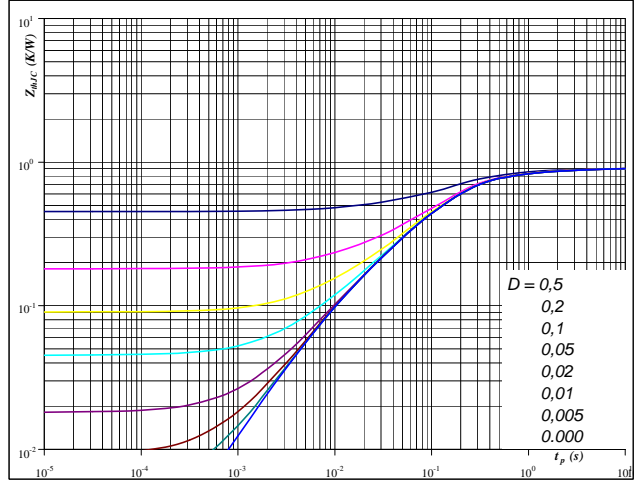


At
 $D = t_p / T$
 $R_{thJH} = 0,90 \text{ K/W}$

Figure 3 D8,D9,D10,D11,D12,D13 diode

Power dissipation as a function of heatsink temperature

$P_{tot} = f(T_h)$

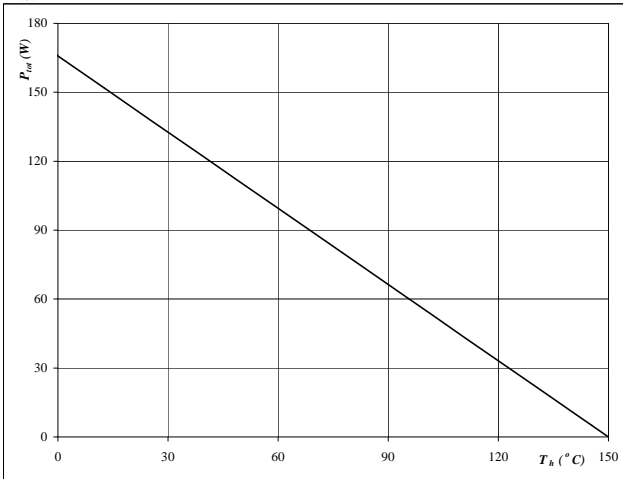


At
 $T_j = 150 \text{ } ^\circ\text{C}$

Figure 4 D8,D9,D10,D11,D12,D13 diode

Forward current as a function of heatsink temperature

$I_F = f(T_h)$

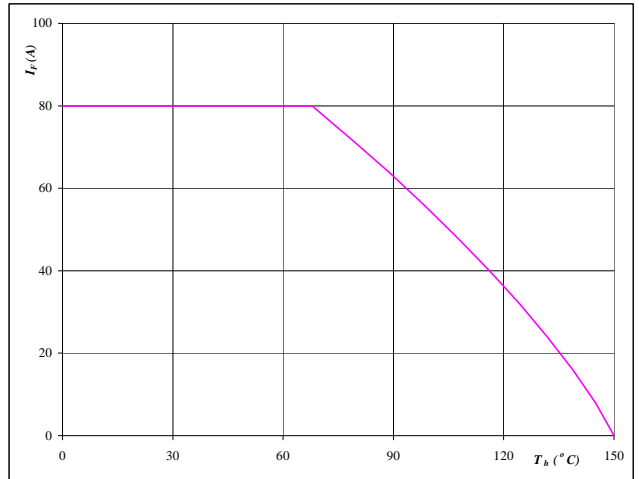


At
 $T_j = 150 \text{ } ^\circ\text{C}$

Thermistor

Figure 1 Thermistor

Typical PTC characteristic
as a function of temperature

$$R_T = f(T)$$

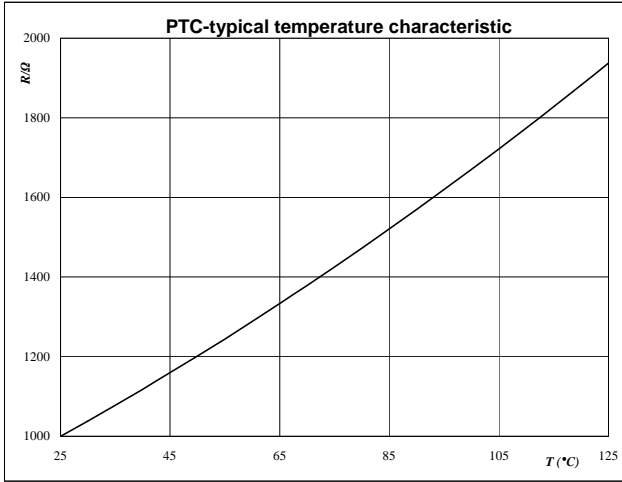


Switching Definitions Output Inverter

General conditions


T_j	=	150 °C
R_{gon}	=	16 Ω
R_{goff}	=	16 Ω

Figure 1 T1,T2,T3,T4,T5,T6,T7 IGBT

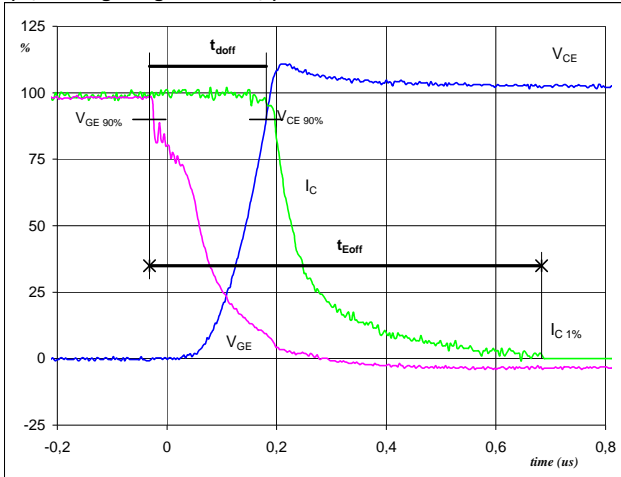Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff}
(t_{Eoff} = integrating time for E_{off})


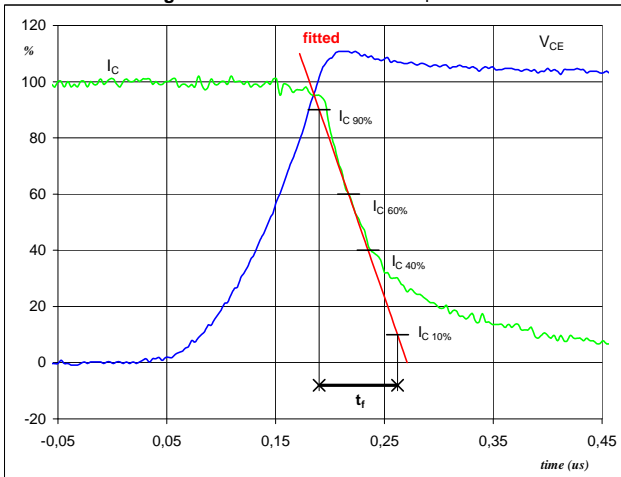
$V_{GE}(0\%) =$	-15	V
$V_{GE}(100\%) =$	15	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	50	A
$t_{doff} =$	0,205	μs
$t_{Eoff} =$	0,715	μs

Figure 2 T1,T2,T3,T4,T5,T6,T7 IGBT

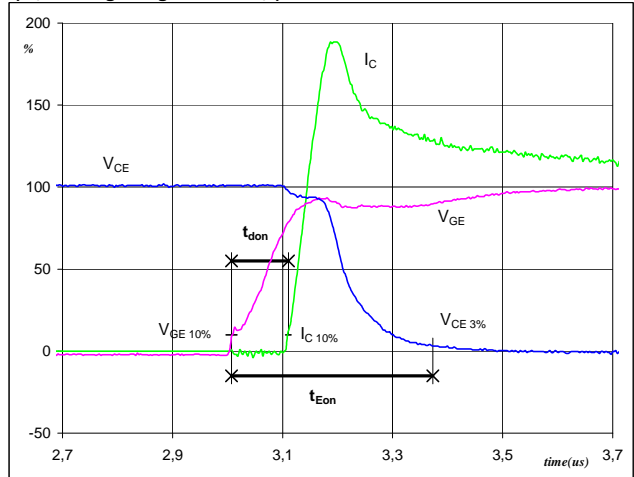Turn-on Switching Waveforms & definition of t_{don} , t_{Eon}
(t_{Eon} = integrating time for E_{on})


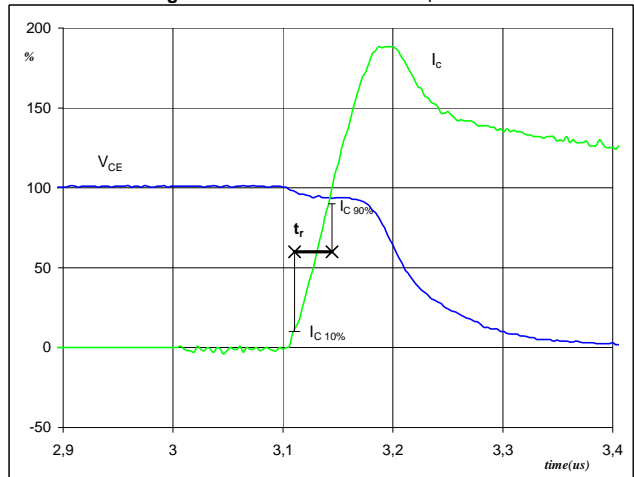
$V_{GE}(0\%) =$	-15	V
$V_{GE}(100\%) =$	15	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	50	A
$t_{don} =$	0,104	μs
$t_{Eon} =$	0,366	μs

Figure 3 T1,T2,T3,T4,T5,T6,T7 IGBT

Turn-off Switching Waveforms & definition of t_f


$V_C(100\%) =$	600	V
$I_C(100\%) =$	50	A
$t_f =$	0,09	μs


Figure 4 T1,T2,T3,T4,T5,T6,T7 IGBT

Turn-on Switching Waveforms & definition of t_r


$V_C(100\%) =$	600	V
$I_C(100\%) =$	50	A
$t_r =$	0,03	μs


Switching Definitions Output Inverter

Figure 5 T1,T2,T3,T4,T5,T6,T7 IGBT

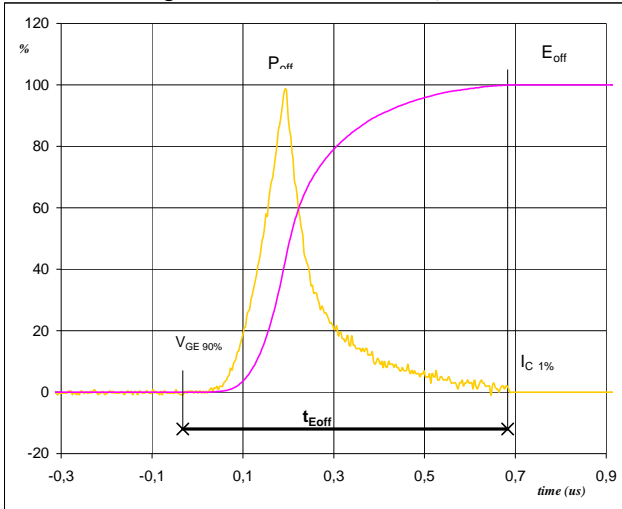Turn-off Switching Waveforms & definition of t_{Eoff}


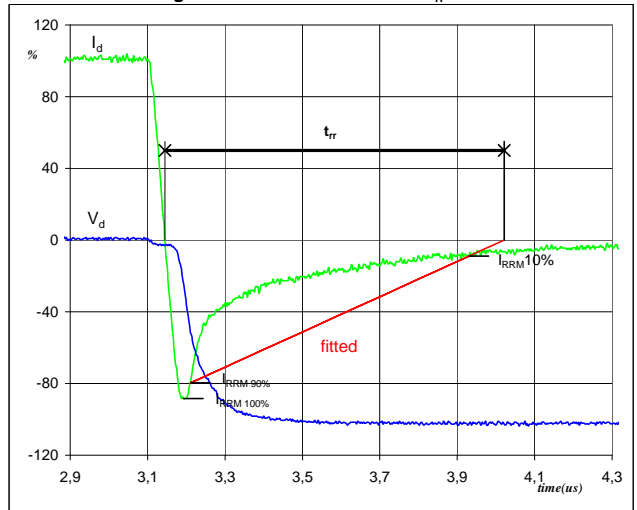
$P_{off} (100\%) = 30,14 \text{ kW}$
 $E_{off} (100\%) = 4,09 \text{ mJ}$
 $t_{Eoff} = 0,72 \text{ }\mu\text{s}$

Figure 6 T1,T2,T3,T4,T5,T6,T7 IGBT

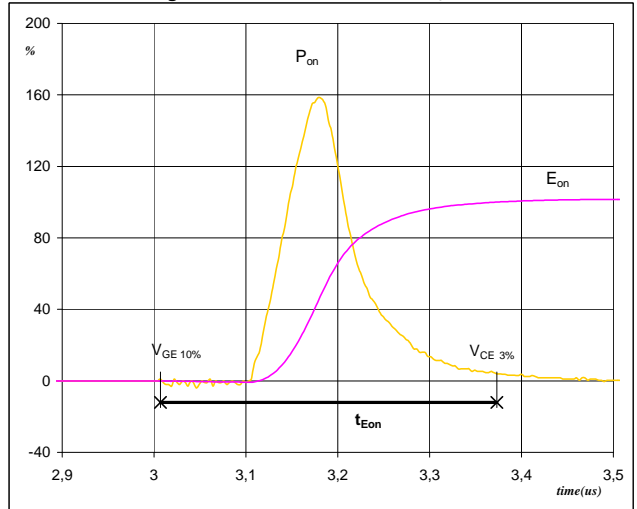Turn-on Switching Waveforms & definition of t_{Eon}


$P_{on} (100\%) = 30,14 \text{ kW}$
 $E_{on} (100\%) = 4,39 \text{ mJ}$
 $t_{Eon} = 0,37 \text{ }\mu\text{s}$

Figure 7 D1,D2,D3,D4,D5,D6,D7 FWD


Turn-off Switching Waveforms & definition of t_{rr}


$V_d (100\%) = 600 \text{ V}$
 $I_d (100\%) = 50 \text{ A}$
 $I_{RRM} (100\%) = -45 \text{ A}$
 $t_{rr} = 0,73 \text{ }\mu\text{s}$

Switching Definitions Output Inverter

Figure 8 D1,D2,D3,D4,D5,D6,D7 FWD


Turn-on Switching Waveforms & definition of t_{Qrr}
 (t_{Qrr} = integrating time for Q_{rr})

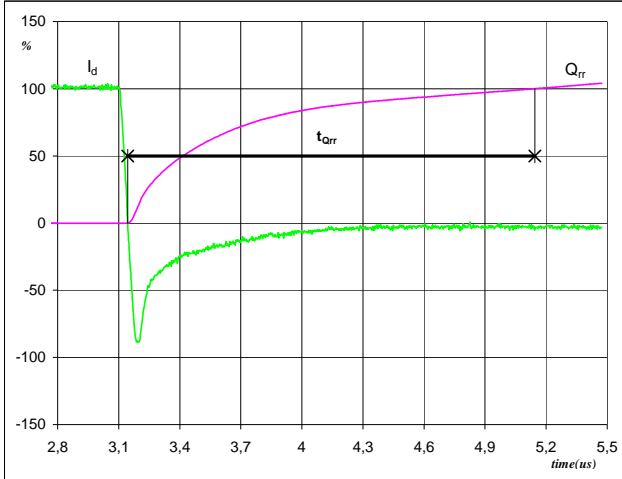

I_d (100%) =	50	A
Q_{rr} (100%) =	10,81	μC
t_{Qrr} =	2,00	μs

Figure 9 D1,D2,D3,D4,D5,D6,D7 FWD



Turn-on Switching Waveforms & definition of t_{Erec}
 (t_{Erec} = integrating time for E_{rec})

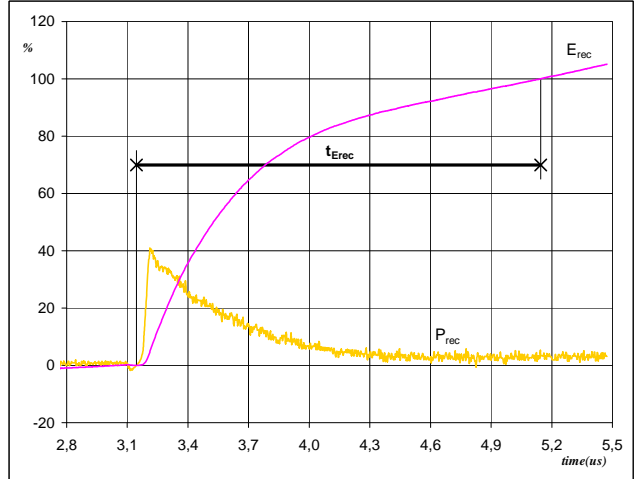

P_{rec} (100%) =	30,14	kW
E_{rec} (100%) =	5,14	mJ
t_{Erec} =	2,00	μs

Ordering Code and Marking - Outline - Pinout
Ordering Code & Marking

Version	Ordering Code	in DataMatrix as	in packaging barcode as
with std lid (black V23990-K32-T-PM)	V23990-K428-A60-/0A/-PM	K428A60	K428A60-/0A/
with std lid (black V23990-K32-T-PM) and P12	V23990-K428-A60-/1A/-PM	K428A60	K428A60-/1A/
with thin lid (white V23990-K33-T-PM)	V23990-K428-A60-/0B/-PM	K428A60	K428A60-/0B/
with thin lid (white V23990-K33-T-PM) and P12	V23990-K428-A60-/1B/-PM	K428A60	K428A60-/1B/

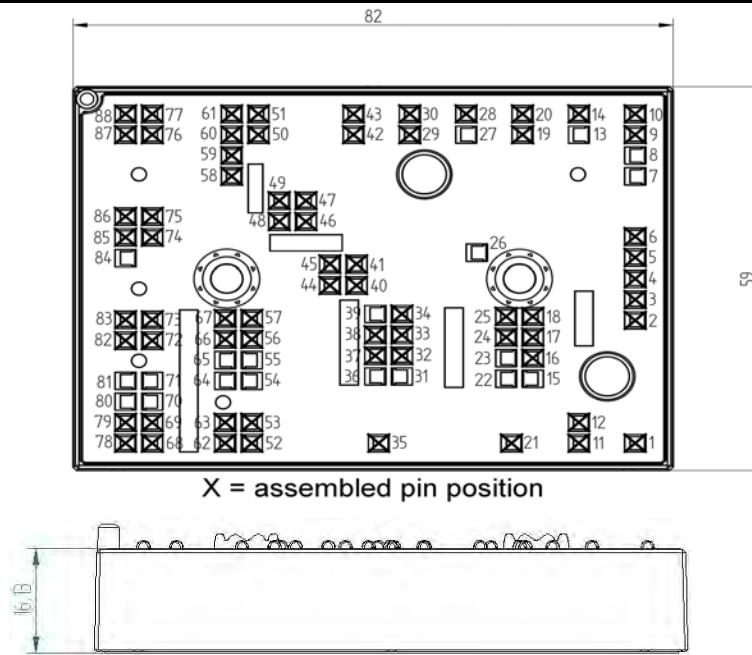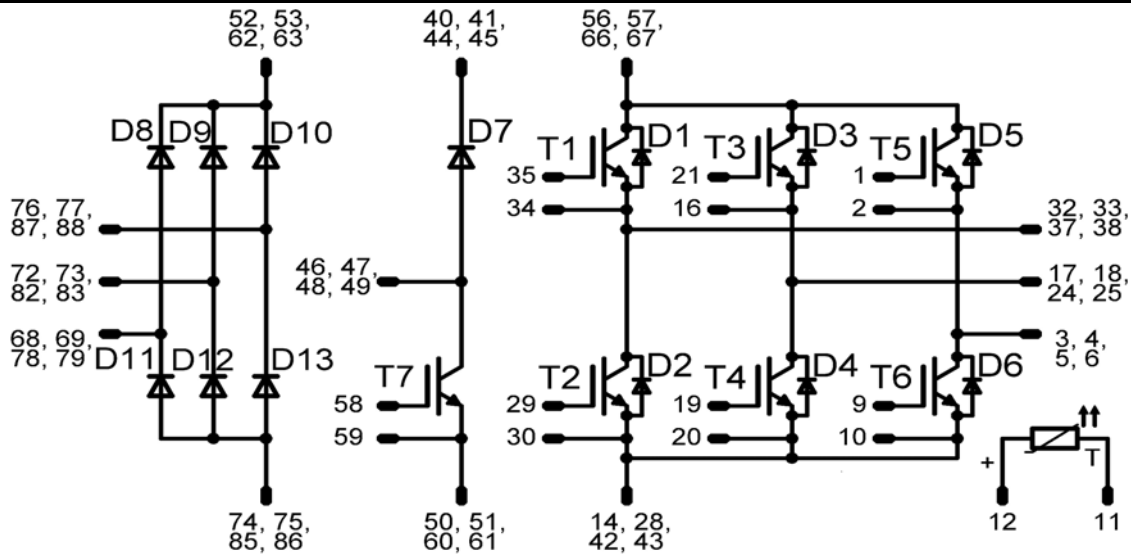Outline

Pinout


DISCLAIMER

The information given in this datasheet describes the type of component and does not represent assured characteristics. For tested values please contact Vincotech. Vincotech reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Vincotech does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.