
35 355195

RAST 2.5 connectors, pitch 2.5/5.0 mm

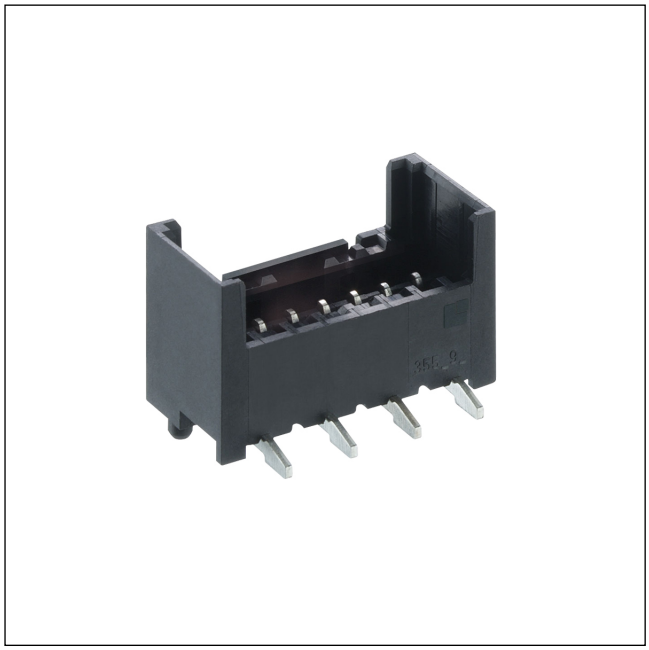



RAST 2.5 plus™ pin header, upright, in surface mount technology (SMT), with one or two positioning spigots, for interior locking, with double-sided keying
contact pitch 2.5 mm


State: New

Approvals:

35 355195

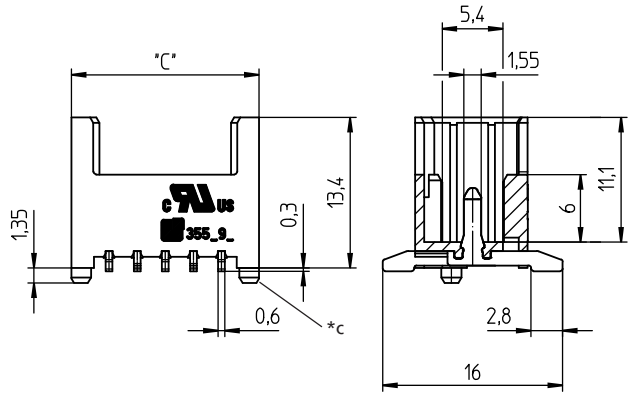

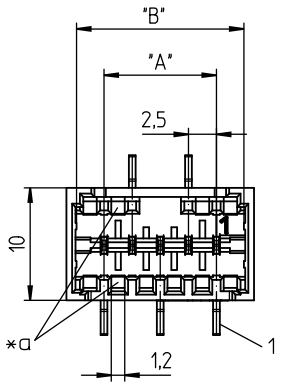

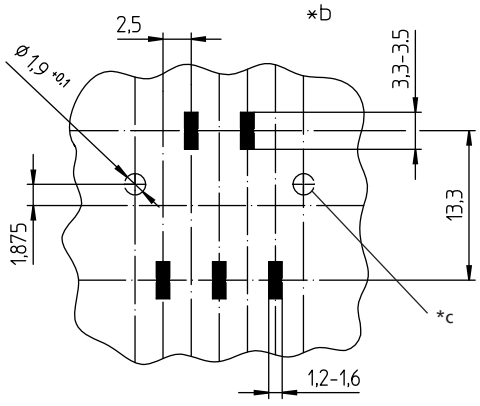

Electrical data (at T_{amb} 20 °C)

Rated current	4 A (T_{amb} 60 °C) 2 A (T_{amb} 100 °C)
Rated voltage	250 V AC

*a keying
*b printed circuit board layout, components side view
*c second positioning spigot at 355195 Z02

35 355195

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
355195 03	3	400	
355195 04	4	400	
355195 05	5	400	
355195 06	6	400	
355195 07	7	400	
355195 03 Z02	3	400	
355195 04 Z02	4	400	
355195 05 Z02	5	400	
355195 06 Z02	6	400	
355195 07 Z02	7	400	

Designation to be completed by further details (e.g. for keying, color or material options).

Packaging:
on reel – in bar stock carriers upon request