


357 Series

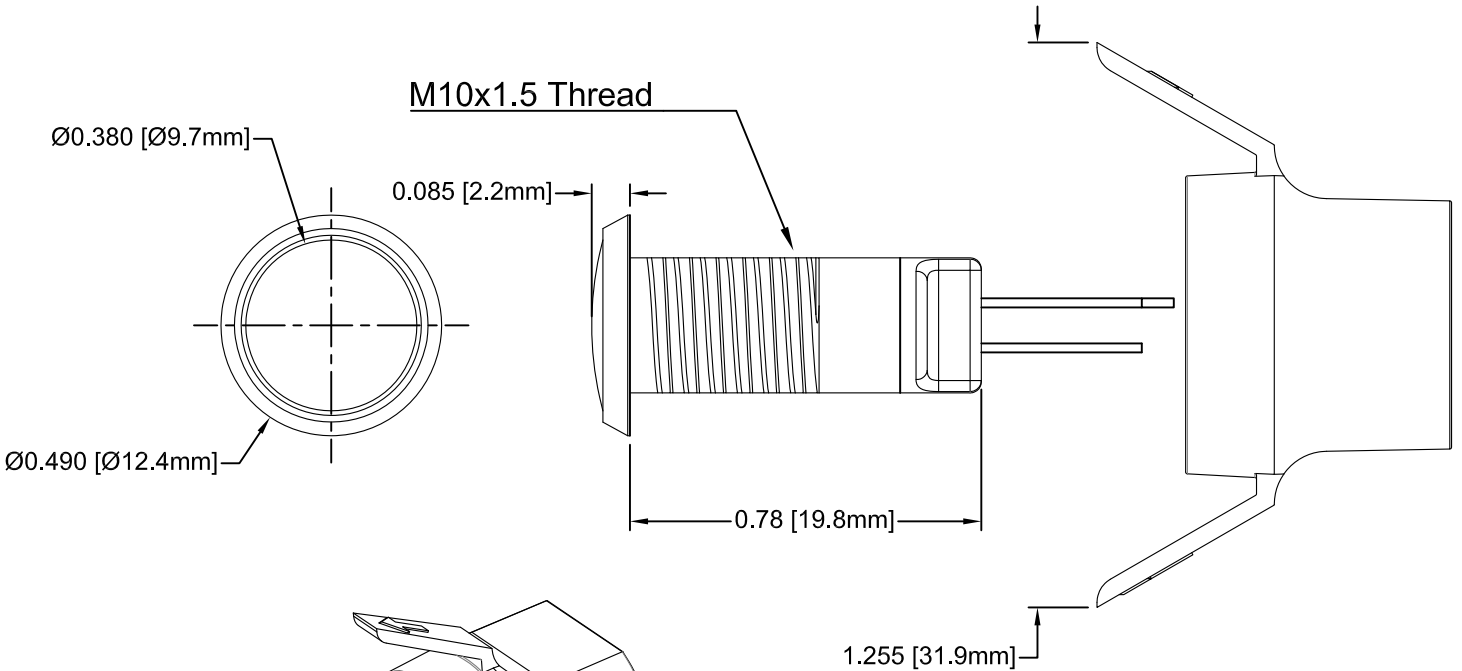

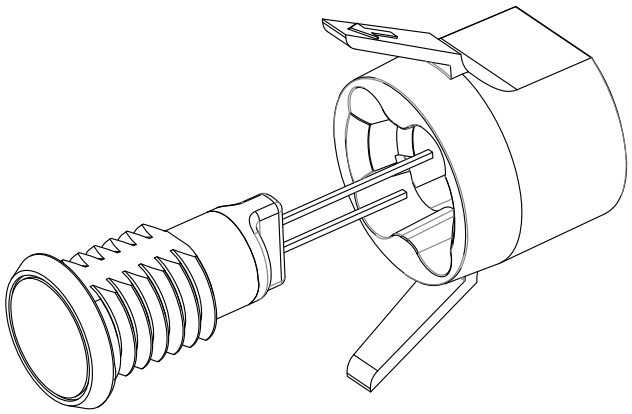

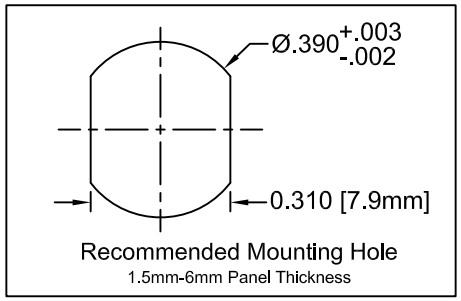

NOTES:
1. TO INSTALL, INSERT HOLDER THROUGH PANEL AND PRESS QUICK NUT ON TO HOLDER AS SHOWN. TABS WILL DEFORM FOR RETENTION
2. ROHS COMPLIANT
3. MOUNTING HARDWARE SHIPPED NON-ASSEMBLED
4. TO REMOVE, TWIST QUICK NUT 90° AND PULL

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)			
DECIMALS		ANGULAR	
.X	± .1	X°	± 1°
.XX	± .02		
.XXX	± .010		

MARL BUSINESS PARK, ULVERSTON, UK. LA12 9BN
Tel: +44 (0)1229 582 430. Web: www.leds.co.uk


TITLE: Quick-Mount Panel Mount Indicator

Provisional

PART NO: 357 Series

CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.

357 Series (Flying Leads version)

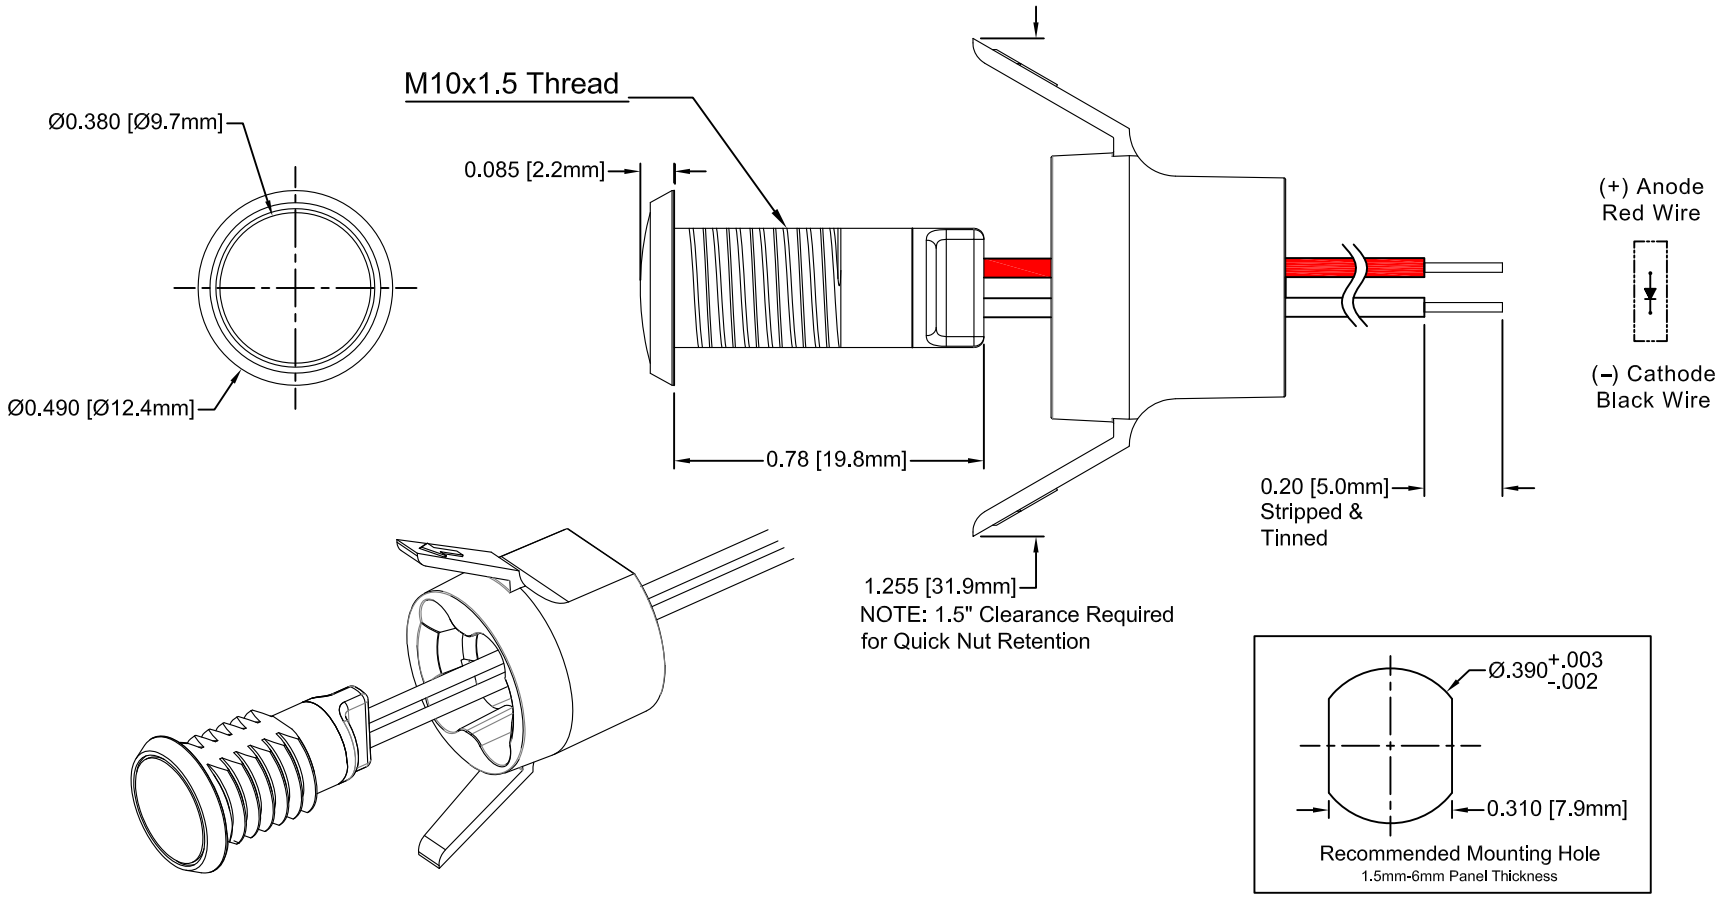

NOTES:
1. TO INSTALL, INSERT HOLDER THROUGH PANEL AND PRESS QUICK NUT ON TO HOLDER AS SHOWN. TABS WILL DEFORM FOR RETENTION
2. ROHS COMPLIANT
3. MOUNTING HARDWARE SHIPPED NON-ASSEMBLED
4. TO REMOVE, TWIST QUICK NUT 90° AND PULL

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)			
DECIMALS		ANGULAR	
.X	± .1	X°	± 1°
.XX	± .02		
.XXX	± .010		

MARL BUSINESS PARK, ULVERSTON, UK. LA12 9BN
Tel: +44 (0)1229 582 430. Web: www.leds.co.uk

TITLE: Quick-Mount Panel Mount Indicator

PART NO: 357 Series

Provisional

CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.

Marl Part No.	LED Part Number	Peak Wave Length λp(nm)	Emitted Colour	Lens Appearance	Electro-Optical Data @ 20mA		Viewing Angle	Termination
					Typ Vf (VDC)	LED Iv (mcd)		
					TYP	TYP		
357-508-04	508	605	AMBER	WHITE DIFFUSED	2.0	25	120	PINS
357-508-04-40								12IN FLYING LEADS
357-520-04	520	430	BLUE	WHITE DIFFUSED	4.0	200	120	PINS
357-520-04-40								12IN FLYING LEADS
357-514-04	514	568	GREEN	WHITE DIFFUSED	2.1	30	120	PINS
357-514-04-40								12IN FLYING LEADS
357-502-04	502	625	HE RED	WHITE DIFFUSED	2.0	25	120	PINS
357-502-04-40								12IN FLYING LEADS
357-505-04	505	645	RED	WHITE DIFFUSED	1.7	40	120	PINS
357-505-04-40								12IN FLYING LEADS
357-511-04	511	590	YELLOW	WHITE DIFFUSED	2.0	300	120	PINS
357-511-04-40								12IN FLYING LEADS

Marl Part No.	LED Part Number	Colour Temperature	Emitted Colour	Lens Appearance	Electro-Optical Data @ 20mA		Viewing Angle	Termination
					Typ Vf (VDC)	LED Iv (mcd)		
					TYP	TYP		
357-997-04	997	5000K	NEUTRAL WHITE	WHITE DIFFUSED	3.2	600	120	PINS
356-997-04-40								12IN FLYING LEADS

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

MAXIMUM REVERSE VOLTAGE _____ 5V
MAXIMUM POWER DISSIPATION _____ 150 mW
OPERATING TEMPERATURE RANGE _____ -30°C ~ 85°C
STORAGE TEMPERATURE _____ -40°C ~ 85°C

STANDARD TOLERANCE
(UNLESS OTHERWISE SPECIFIED)

DECIMALS		ANGULAR	
.X	± .1	X°	± 1°
.XX	± .02		
.XXX	± .010		

Provisional

MARL
MARL BUSINESS PARK, ULVERSTON, UK. LA12 9BN
Tel: +44 (0)1229 582 430. Web: www.leds.co.uk

TITLE:
Quick-Mount Panel Mount Indicator

PART NO:
357 Series

CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.