

# SN74ABTE16246

## 11-BIT INCIDENT-WAVE SWITCHING BUS TRANSCEIVER WITH 3-STATE AND OPEN-COLLECTOR OUTPUTS

SCBS227J – JULY 1993 – REVISED AUGUST 2003

- Member of the Texas Instruments Widebus™ Family
- Supports the VME64 ETL Specification
- Reduced TTL-Compatible Input Threshold Range
- High-Drive Outputs ( $I_{OH} = -60\text{ mA}$ ,  $I_{OL} = 90\text{ mA}$ ) Support Equivalent 25- $\Omega$  Incident-Wave Switching
- $V_{CCBIAS}$  Pin Minimizes Signal Distortion During Live Insertion
- Internal Pullup Resistor on  $\overline{OE}$  Keeps Outputs in High-Impedance State During Power Up or Power Down
- Distributed  $V_{CC}$  and GND Pins Minimize High-Speed Switching Noise
- Equivalent 25- $\Omega$  Series Damping Resistor on B Port
- Bus Hold on Data Inputs Eliminates the Need for External Pullup/Pulldown Resistors

### description/ordering information

The SN74ABTE16246 is an 11-bit noninverting transceiver designed for asynchronous two-way communication between buses. This device has open-collector and 3-state outputs. The device allows data transmission from the A bus to the B bus or from the B bus to the A bus, depending on the logic level at the direction-control (DIR) input. The output-enable ( $\overline{OE}$ ) input can be used to disable the device so that the buses are effectively isolated. When  $\overline{OE}$  is low, the device is active.

The B port has an equivalent 25- $\Omega$  series output resistor to reduce ringing. Active bus-hold inputs on the B port hold unused or floating inputs at a valid logic level.

The A port provides for the precharging of the outputs via  $V_{CCBIAS}$ , which establishes a voltage between 1.3 V and 1.7 V when  $V_{CC}$  is not connected.

Active bus-hold circuitry holds unused or undriven inputs at a valid logic state. Use of pullup or pulldown resistors with the bus-hold circuitry is not recommended.

### DGG OR DL PACKAGE (TOP VIEW)

|                    |    |    |                 |
|--------------------|----|----|-----------------|
| 11 $\overline{OE}$ | 1  | 48 | $V_{CCBIAS}$    |
| 11DIR              | 2  | 47 | 11A             |
| 11B                | 3  | 46 | 10DIR           |
| GND                | 4  | 45 | GND             |
| 10B                | 5  | 44 | 10A             |
| 9B                 | 6  | 43 | 9A              |
| $V_{CC}$           | 7  | 42 | $V_{CC}$        |
| 8BI                | 8  | 41 | 9DIR            |
| 8BO                | 9  | 40 | 8A              |
| GND                | 10 | 39 | GND             |
| 7BO                | 11 | 38 | 7A              |
| 6BI                | 12 | 37 | 7BI             |
| 6BO                | 13 | 36 | 6A              |
| 5BO                | 14 | 35 | 5A              |
| GND                | 15 | 34 | GND             |
| 4BO                | 16 | 33 | 5BI             |
| 4BI                | 17 | 32 | 4A              |
| $V_{CC}$           | 18 | 31 | $V_{CC}$        |
| 3BO                | 19 | 30 | 3A              |
| 2BI                | 20 | 29 | 3BI             |
| GND                | 21 | 28 | GND             |
| 2BO                | 22 | 27 | 2A              |
| 1BO                | 23 | 26 | 1A              |
| 1BI                | 24 | 25 | $\overline{OE}$ |

### ORDERING INFORMATION

| $T_A$         | PACKAGE†    |               | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|---------------|-------------|---------------|-----------------------|------------------|
| -40°C to 85°C | SSOP – DL   | Tube          | SN74ABTE16246DL       | ABTE16246        |
|               |             | Tape and reel | SN74ABTE16246DLR      |                  |
|               | TSSOP – DGG | Tape and reel | SN74ABTE16246DGGR     | ABTE16246        |

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Widebus is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2003, Texas Instruments Incorporated

# 11-BIT INCIDENT-WAVE SWITCHING BUS TRANSCEIVER WITH 3-STATE AND OPEN-COLLECTOR OUTPUTS

SCBS227J – JULY 1993 – REVISED AUGUST 2003

FUNCTION TABLE


| INPUTS          |      |       |       |                    | OPERATION                                                                  |
|-----------------|------|-------|-------|--------------------|----------------------------------------------------------------------------|
| $\overline{OE}$ | 9DIR | 10DIR | 11DIR | 11 $\overline{OE}$ |                                                                            |
| H               | X    | X     | X     | X                  | Isolation                                                                  |
| L               | X    | X     | X     | X                  | 1BI–8BI data to 1A–8A bus (OC <sup>†</sup> ),<br>1A–8A data to 1BO–8BO bus |
| L               | L    | X     | X     | X                  | 9A data to 9B bus                                                          |
| L               | H    | X     | X     | X                  | 9B data to 9A bus                                                          |
| L               | X    | L     | X     | X                  | 10A data to 10B bus                                                        |
| L               | X    | H     | X     | X                  | 10B data to 10A bus                                                        |
| L               | X    | X     | L     | L                  | 11A data to 11B bus                                                        |
| L               | X    | X     | L     | H                  | 11A, 11B isolation                                                         |
| L               | X    | X     | H     | X                  | 11B data to 11A bus                                                        |

<sup>†</sup> OC = Open-collector outputs

SN74ABTE16246  
**11-BIT INCIDENT-WAVE SWITCHING BUS TRANSCEIVER**  
**WITH 3-STATE AND OPEN-COLLECTOR OUTPUTS**

SCBS227J – JULY 1993 – REVISED AUGUST 2003

logic diagram (positive logic)

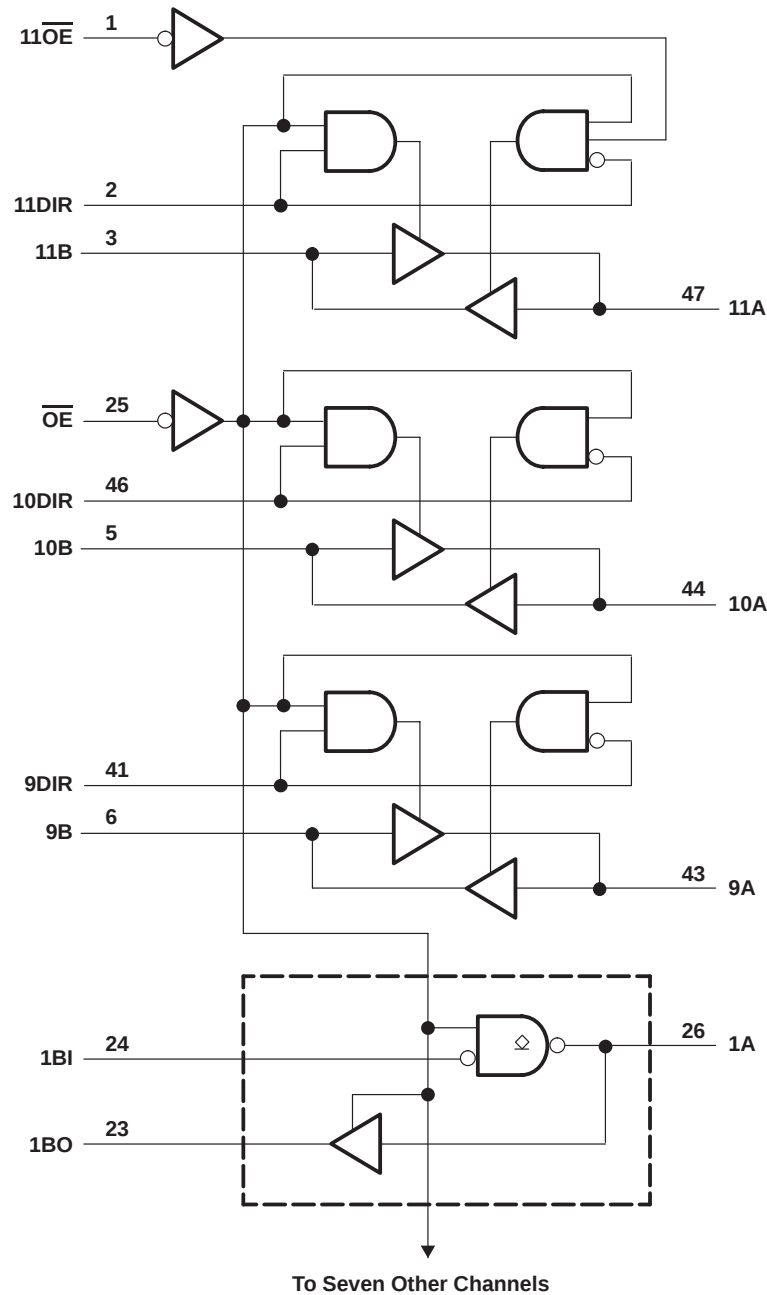

# 11-BIT INCIDENT-WAVE SWITCHING BUS TRANSCEIVER WITH 3-STATE AND OPEN-COLLECTOR OUTPUTS

SCBS227J – JULY 1993 – REVISED AUGUST 2003

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                                           |                 |
|---------------------------------------------------------------------------|-----------------|
| Supply voltage range, $V_{CC}$ and $V_{CCBIAS}$                           | –0.5 V to 7 V   |
| Input voltage range, $V_I$ (except I/O ports) (see Note 1)                | –0.5 V to 7 V   |
| Voltage range applied to any output in the high or power-off state, $V_O$ | –0.5 V to 5.5 V |
| Current into any output in the low state, $I_O$                           | 128 mA          |
| Input clamp current, $I_{IK}$ ( $V_I < 0$ )                               | –18 mA          |
| Output clamp current, $I_{OK}$ ( $V_O < 0$ )                              | –50 mA          |
| Package thermal impedance, $\theta_{JA}$ (see Note 2): DGG package        | 70°C/W          |
| DL package                                                                | 63°C/W          |
| Storage temperature range, $T_{stg}$                                      | –65°C to 150°C  |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.  
2. The package thermal impedance is calculated in accordance with JESD 51-7.

## recommended operating conditions (see Note 3)

|                            |                                    |                        | MIN | NOM | MAX      | UNIT |
|----------------------------|------------------------------------|------------------------|-----|-----|----------|------|
| $V_{CC}$ ,<br>$V_{CCBIAS}$ | Supply voltage                     |                        | 4.5 | 5   | 5.5      | V    |
| $V_{IH}$                   | High-level input voltage           | $\overline{OE}$        | 2   |     |          | V    |
|                            |                                    | Except $\overline{OE}$ | 1.6 |     |          |      |
| $V_{IL}$                   | Low-level input voltage            | $\overline{OE}$        |     |     | 0.8      | V    |
|                            |                                    | Except $\overline{OE}$ |     |     | 1.4      |      |
| $V_{OH}$                   | High-level output voltage          | 1A–8A                  | 0   |     | 5.5      | V    |
| $V_I$                      | Input voltage                      |                        | 0   |     | $V_{CC}$ | V    |
| $I_{OH}$                   | High-level output current          | B bus                  |     |     | –12      | mA   |
|                            |                                    | 9A–11A                 |     |     | –64      |      |
| $I_{OL}$                   | Low-level output current           | B bus                  |     |     | 12       | mA   |
|                            |                                    | A bus                  |     |     | 90       |      |
| $\Delta t/\Delta v$        | Input transition rise or fall rate | Outputs enabled        |     |     | 10       | ns/V |
| $T_A$                      | Operating free-air temperature     |                        | –40 |     | 85       | °C   |

NOTE 3: All unused control inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

**SN74ABTE16246**  
**11-BIT INCIDENT-WAVE SWITCHING BUS TRANSCEIVER**  
**WITH 3-STATE AND OPEN-COLLECTOR OUTPUTS**

SCBS227J – JULY 1993 – REVISED AUGUST 2003

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

| PARAMETER                     |                          | TEST CONDITIONS                                                                      |                                         | MIN                  | TYP† | MAX  | UNIT       |
|-------------------------------|--------------------------|--------------------------------------------------------------------------------------|-----------------------------------------|----------------------|------|------|------------|
| V <sub>IK</sub>               |                          | V <sub>CC</sub> = 4.5 V, I <sub>I</sub> = −18 mA                                     |                                         |                      |      | −1.2 | V          |
| V <sub>OH</sub>               | B port                   | V <sub>CC</sub> = 5.5 V,                                                             | I <sub>OH</sub> = −100 μA               | V <sub>CC</sub> −0.2 |      |      | V          |
|                               |                          | V <sub>CC</sub> = 4.5 V                                                              | I <sub>OH</sub> = −1 mA                 | 2.4                  |      |      |            |
|                               | I <sub>OH</sub> = −12 mA |                                                                                      | 2                                       |                      |      |      |            |
|                               | 9A–11A                   | V <sub>CC</sub> = 5.5 V,                                                             | I <sub>OH</sub> = −1 mA                 | 4.5                  |      |      |            |
|                               |                          | V <sub>CC</sub> = 4.5 V                                                              | I <sub>OH</sub> = −32 mA                | 2.4                  |      |      |            |
|                               |                          |                                                                                      | I <sub>OH</sub> = −64 mA                | 2                    |      |      |            |
| I <sub>OH</sub>               | 1A–8A                    | V <sub>CC</sub> = 4.5 V,                                                             | V <sub>OH</sub> = 5.5 V                 |                      | 20   | μA   |            |
| V <sub>OL</sub>               | B port                   | V <sub>CC</sub> = 4.5 V                                                              | I <sub>OL</sub> = 1 mA                  |                      | 0.4  | V    |            |
|                               |                          |                                                                                      | I <sub>OL</sub> = 12 mA                 |                      | 0.8  |      |            |
|                               | A port                   | V <sub>CC</sub> = 4.5 V                                                              | I <sub>OL</sub> = 64 mA                 |                      | 0.55 |      |            |
|                               |                          |                                                                                      | I <sub>OL</sub> = 90 mA                 |                      | 0.9  |      |            |
| V <sub>hys</sub>              |                          |                                                                                      |                                         |                      | 100  |      | mV         |
| I <sub>I</sub> (hold)         | B port                   | V <sub>CC</sub> = 4.5 V                                                              | V <sub>I</sub> = 0.8 V                  | 100                  |      |      | μA         |
|                               |                          |                                                                                      | V <sub>I</sub> = 2 V                    | −100                 |      |      |            |
|                               |                          | V <sub>CC</sub> = 5.5 V,                                                             | V <sub>I</sub> = 0 to 5.5 V             |                      | ±500 |      |            |
| I <sub>I</sub>                | Control inputs           | V <sub>CC</sub> = 5.5 V                                                              | V <sub>I</sub> = V <sub>CC</sub> or GND |                      |      | ±1   | μA         |
|                               | A or B ports             | V <sub>CC</sub> = 5.5 V, $\overline{OE}$ = V <sub>CC</sub>                           |                                         |                      |      | ±20  |            |
| I <sub>OZH</sub> <sup>‡</sup> | 9A–11A                   | V <sub>CC</sub> = 5.5 V,                                                             | V <sub>O</sub> = 2.7 V                  |                      |      | 10   | μA         |
| I <sub>OZL</sub> <sup>‡</sup> | 9A–11A                   | V <sub>CC</sub> = 5.5 V,                                                             | V <sub>O</sub> = 0.5 V                  |                      |      | −10  | μA         |
| I <sub>O</sub>                | A port                   | V <sub>CC</sub> = 5.5 V,                                                             | V <sub>O</sub> = 2.5 V                  | −50                  |      | −180 | mA         |
|                               | B port                   |                                                                                      |                                         | −25                  |      | −90  |            |
| I <sub>off</sub>              |                          | V <sub>CC</sub> = 0, V <sub>I</sub> or V <sub>O</sub> ≤ 4.5 V,                       | V <sub>CC</sub> BIAS = 0                |                      |      | ±100 | μA         |
| I <sub>CC</sub>               | A or B ports             | V <sub>CC</sub> = 5.5 V, I <sub>O</sub> = 0, V <sub>I</sub> = V <sub>CC</sub> or GND | Outputs high                            |                      | 28   | 36   | mA         |
|                               |                          |                                                                                      | Outputs low                             |                      | 38   | 48   |            |
|                               |                          |                                                                                      | Outputs disabled                        |                      | 20   | 32   |            |
| I <sub>CCD</sub>              | A or B ports             | V <sub>CC</sub> = 5 V, C <sub>L</sub> = 50 pF                                        | $\overline{OE}$ high                    |                      | 0.02 |      | mA/<br>MHz |
|                               |                          |                                                                                      | $\overline{OE}$ low                     |                      | 0.33 |      |            |
| C <sub>i</sub>                | Control inputs           | V <sub>I</sub> = 2.5 V or 0.5 V                                                      |                                         |                      | 2.5  | 4    | pF         |
| C <sub>iO</sub>               | I/O ports                | V <sub>O</sub> = 2.5 V or 0.5 V                                                      |                                         |                      | 4.5  | 8    | pF         |

<sup>†</sup> All typical values are at  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

<sup>‡</sup> The parameters  $I_{OZH}$  and  $I_{OZL}$  include the input leakage current.

# 11-BIT INCIDENT-WAVE SWITCHING BUS TRANSCEIVER WITH 3-STATE AND OPEN-COLLECTOR OUTPUTS

SCBS227J – JULY 1993 – REVISED AUGUST 2003

## live-insertion specifications over recommended operating free-air temperature range

| PARAMETER                 |        | TEST CONDITIONS                          |                                 |                 | MIN | TYP <sup>†</sup> | MAX  | UNIT    |
|---------------------------|--------|------------------------------------------|---------------------------------|-----------------|-----|------------------|------|---------|
| $I_{CC}$ ( $V_{CCBIAS}$ ) |        | $V_{CC} = 0$ to 4.5 V,                   | $V_{CCBIAS} = 4.5$ V to 5.5 V,  | $I_{O(DC)} = 0$ |     | 250              | 700  | $\mu A$ |
|                           |        | $V_{CC} = 4.5$ V to 5.5 V <sup>‡</sup> , | $V_{CCBIAS} = 4.5$ V to 5.5 V,  | $I_{O(DC)} = 0$ |     |                  | 20   |         |
| $V_O$                     | A port | $V_{CC} = 0$                             | $V_{CCBIAS} = 4.5$ V to 5.5 V   |                 | 1.1 | 1.5              | 1.9  | V       |
|                           |        |                                          | $V_{CCBIAS} = 4.75$ V to 5.25 V |                 | 1.3 | 1.5              | 1.7  |         |
| $I_O$                     | A port | $V_{CC} = 0$ ,                           | $V_{CCBIAS} = 4.5$ V            | $V_O = 0$       | -20 |                  | -100 | $\mu A$ |
|                           |        |                                          |                                 | $V_O = 3$ V     | 20  |                  | 100  |         |

<sup>†</sup> All typical values are at  $V_{CC} = 5$  V,  $T_A = 25^\circ C$ .<sup>‡</sup>  $V_{CC} - 0.5$  V <  $V_{CCBIAS}$ 

## switching characteristics over recommended ranges of supply voltage and operating free-air temperature, $C_L = 50$ pF (unless otherwise noted) (see Figure 2)

| PARAMETER      | FROM<br>(INPUT) | TO<br>(OUTPUT) | $V_{CC} = 5$ V,<br>$T_A = 25^\circ C$ |     |     | MIN | MAX  | UNIT |
|----------------|-----------------|----------------|---------------------------------------|-----|-----|-----|------|------|
|                |                 |                | MIN                                   | TYP | MAX |     |      |      |
| $t_{PLH}$      | A               | B              | 1.5                                   | 3.1 | 4.2 | 1.5 | 5.2  | ns   |
| $t_{PHL}$      |                 |                | 1.5                                   | 3.5 | 4.6 | 1.5 | 5.2  |      |
| $t_{PLH}$      | 9B–11B          | 9A–11A         | 1.5                                   | 3   | 3.8 | 1.5 | 4.5  | ns   |
| $t_{PHL}$      |                 |                | 1.5                                   | 3.2 | 4   | 1.5 | 4.5  |      |
| $t_{PLH}^{\S}$ | 1B–8B           | 1A–8A          | 1.5                                   | 3.2 | 4   | 1.5 | 4.5  | ns   |
| $t_{PLH}^{\P}$ |                 |                | 7.5                                   | 8.9 | 9.7 | 7.5 | 10.3 |      |
| $t_{PHL}$      |                 |                | 1.5                                   | 3.2 | 4   | 1.5 | 4.5  |      |
| $t_{PZH}$      | $\overline{OE}$ | 9A–11A         | 2                                     | 4.3 | 5.3 | 2   | 6.2  | ns   |
| $t_{PZL}$      |                 | 1A–11A         | 2                                     | 4.4 | 5.4 | 2   | 6.8  |      |
| $t_{PZH}$      | $\overline{OE}$ | B              | 2                                     | 4.3 | 6   | 2   | 7.1  | ns   |
| $t_{PZL}$      |                 |                | 2                                     | 4.5 | 6.4 | 2   | 7.3  |      |
| $t_{PHZ}$      | $\overline{OE}$ | 9A–11A         | 2                                     | 4.2 | 5.9 | 2   | 6.7  | ns   |
| $t_{PLZ}$      |                 | 1A–11A         | 2                                     | 3.5 | 4.6 | 2   | 5.1  |      |
| $t_{PHZ}$      | $\overline{OE}$ | B              | 2.5                                   | 4.3 | 6.2 | 2.5 | 7    | ns   |
| $t_{PLZ}$      |                 |                | 2                                     | 3.6 | 5   | 2   | 5.5  |      |

<sup>\S</sup> Measurement point is  $V_{OL} + 0.3$  V.<sup>\P</sup> Measurement point is  $V_{OL} + 1.5$  V.

**SN74ABTE16246**  
**11-BIT INCIDENT-WAVE SWITCHING BUS TRANSCEIVER**  
**WITH 3-STATE AND OPEN-COLLECTOR OUTPUTS**

SCBS227J – JULY 1993 – REVISED AUGUST 2003

**extended switching characteristics over recommended ranges of supply voltage and operating free-air temperature,  $C_L = 50$  pF (unless otherwise noted) (see Figure 2)**

| PARAMETER      | FROM<br>(INPUT) | TO<br>(OUTPUT) | LOAD                | $V_{CC} = 5$ V,<br>$T_A = 25^\circ\text{C}$ |     |     | MIN | MAX | UNIT |
|----------------|-----------------|----------------|---------------------|---------------------------------------------|-----|-----|-----|-----|------|
|                |                 |                |                     | MIN                                         | TYP | MAX |     |     |      |
| $t_{PLH}$      | 9B–11B          | 9A–11A         | $R_X = 13\ \Omega$  | 1.5                                         | 3.2 | 4   | 1.5 | 4.8 | ns   |
| $t_{PHL}$      |                 |                |                     | 1.5                                         | 3.8 | 4.7 | 1.5 | 5.6 |      |
| $t_{PHL}$      | 1B–8B           | 1A–8A          | $R_X = 13\ \Omega$  | 1.5                                         | 3.3 | 4.2 | 1.5 | 4.8 | ns   |
| $t_{PLH}$      | 9B–11B          | 9A–11A         | $R_X = 26\ \Omega$  | 1.5                                         | 3.1 | 4   | 1.5 | 4.6 | ns   |
| $t_{PHL}$      |                 |                |                     | 1.5                                         | 3.5 | 4.4 | 1.5 | 4.9 |      |
| $t_{PHL}$      | 1B–8B           | 1A–8A          | $R_X = 26\ \Omega$  | 1.5                                         | 3.1 | 4   | 1.5 | 4.4 | ns   |
| $t_{PLH}$      | 9B–11B          | 1A–8A          | $R_X = 56\ \Omega$  | 1.5                                         | 3   | 3.8 | 1.5 | 4.5 | ns   |
| $t_{PHL}$      |                 |                |                     | 1.5                                         | 3.3 | 4.2 | 1.5 | 4.7 |      |
| $t_{PHL}$      | 1B–8B           | 1A–8A          | $R_X = 56\ \Omega$  | 1.5                                         | 3   | 4   | 1.5 | 4.4 | ns   |
| $t_{sk(p)}$    | B               | A              | $R_X = \text{Open}$ |                                             | 0.1 | 0.6 |     | 2   | ns   |
|                | A               | B              | $R_X = \text{Open}$ |                                             | 0.4 | 0.8 |     | 2   |      |
|                | B               | A              | $R_X = 26\ \Omega$  |                                             | 0.3 | 0.8 |     | 2   |      |
| $t_{sk(o)}$    | B               | A              | $R_X = \text{Open}$ |                                             | 0.3 | 0.7 |     | 1.3 | ns   |
|                | A               | B              | $R_X = \text{Open}$ |                                             | 0.7 | 1.1 |     | 1.3 |      |
|                | B               | A              | $R_X = 26\ \Omega$  |                                             | 0.5 | 1   |     | 1.3 |      |
| $t_t^\dagger$  | B               | A              | $R_X = 26\ \Omega$  | 0.5                                         | 0.8 | 1.5 | 0.5 | 1.5 | ns   |
| $t_t^\ddagger$ | A               | B              | $R_X = \text{Open}$ | 3.5                                         | 5.5 | 7.3 | 3.5 | 7.9 | ns   |

$^\dagger t_t$  is measured between 1 V and 2 V of the output waveform.

$^\ddagger t_t$  is measured between 10% and 90% of the output waveform.


**extended output characteristics over recommended ranges of supply voltage and operating free-air temperature,  $C_L = 50$  pF (see Figures 1 and 2)**

| PARAMETER      | FROM<br>(INPUT) | TO<br>(OUTPUT) | TEST CONDITIONS                                                | LOAD                                   | MIN | MAX | UNIT |
|----------------|-----------------|----------------|----------------------------------------------------------------|----------------------------------------|-----|-----|------|
| $t_{sk(temp)}$ | A               | B              | $V_{CC} = \text{constant},$<br>$\Delta T_A = 20^\circ\text{C}$ |                                        |     | 2.5 | ns   |
|                | B               | A              |                                                                | $R_X = 56\ \Omega$                     |     | 4   |      |
| $t_{sk(load)}$ | B               | A              | $V_{CC} = \text{constant},$<br>Temperature = constant          | $R_X = 13, 26, \text{ or } 56\ \Omega$ |     | 4   | ns   |

**SN74ABTE16246**  
**11-BIT INCIDENT-WAVE SWITCHING BUS TRANSCEIVER**  
**WITH 3-STATE AND OPEN-COLLECTOR OUTPUTS**

SCBS227J – JULY 1993 – REVISED AUGUST 2003

**PARAMETER MEASUREMENT INFORMATION**

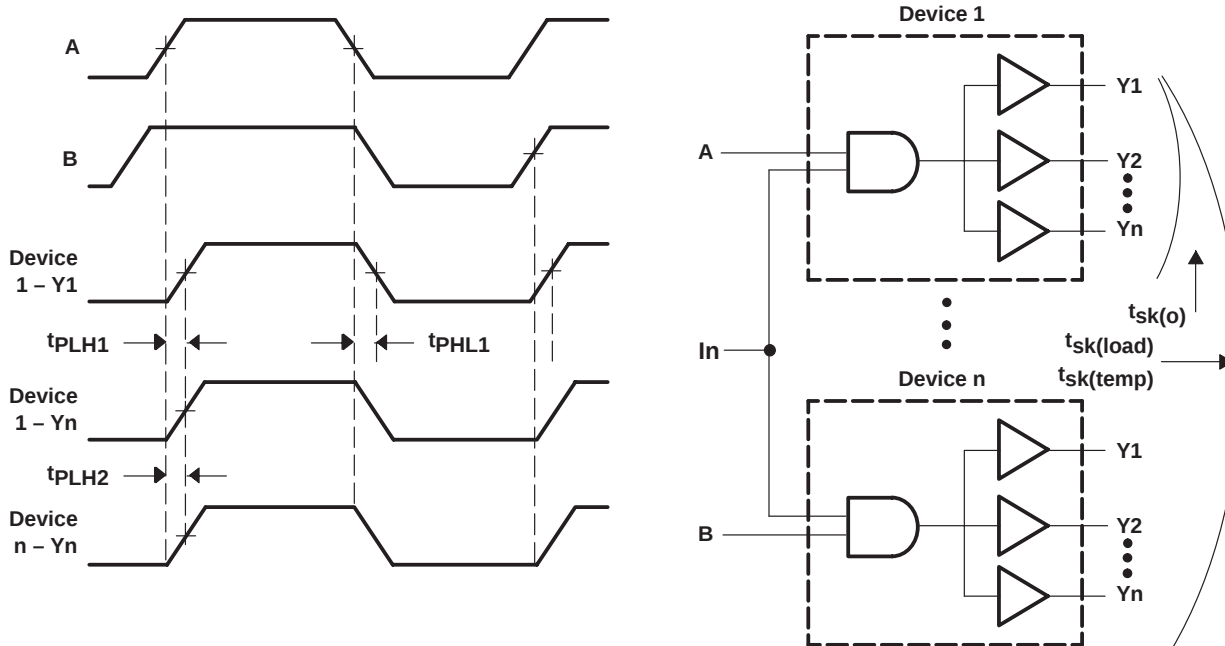

- NOTES: A. Pulse skew,  $t_{sk(p)}$ , is defined as the difference in propagation-delay times  $t_{PLH1}$  and  $t_{PHL1}$  on the same terminal at identical operating conditions.
- B. Output skew,  $t_{sk(o)}$ , is defined as the difference in propagation delay of any two outputs of the same device switching in the same direction (e.g.,  $|t_{PLH1} - t_{PLH2}|$ ).
- C. Temperature skew,  $t_{sk(temp)}$ , is the output skew of two devices, both having the same value of  $V_{CC} \pm 1\%$  and with package temperature differences of  $20^{\circ}\text{C}$ .
- D. Load skew,  $t_{sk(load)}$ , is measured with  $R_X$  in Figure 2 at  $13\ \Omega$  for one unit and  $56\ \Omega$  for the other unit.


**Figure 1. Voltage Waveforms for Extended Characteristics**

SN74ABTE16246

# 11-BIT INCIDENT-WAVE SWITCHING BUS TRANSCEIVER WITH 3-STATE AND OPEN-COLLECTOR OUTPUTS


SCBS227J – JULY 1993 – REVISED AUGUST 2003

## PARAMETER MEASUREMENT INFORMATION

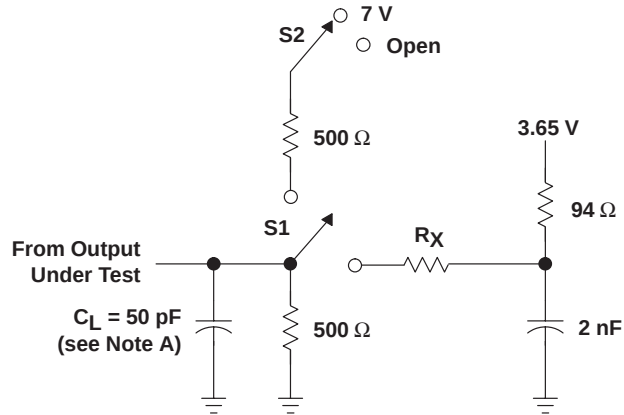

$R_X = 13, 26, \text{ or } 56 \, \Omega$


LOAD CIRCUIT

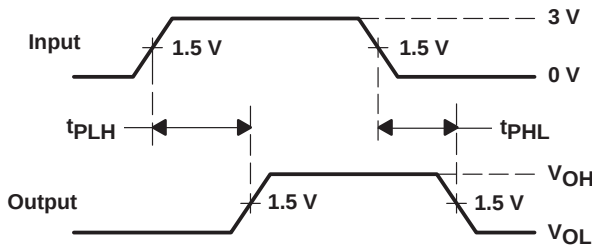

VOLTAGE WAVEFORMS  
PROPAGATION DELAY TIMES

| SWITCHING TABLE LOADS                 | S1 | S2   |
|---------------------------------------|----|------|
| $t_{PLH}/t_{PHL}$ (9A–11A and B port) | Up | Open |
| $t_{PLH}/t_{PHL}$ (1A–8A)             | Up | 7 V  |
| $t_{PLZ}/t_{PZL}$                     | Up | 7 V  |
| $t_{PHZ}/t_{PZH}$ (except 1A–8A)      | Up | Open |

| EXTENDED SWITCHING TABLE LOADS    | S1   | S2   |
|-----------------------------------|------|------|
| $t_{PLH}/t_{PHL}/t_{sk}$ (A port) | Down | X    |
| $t_{PLH}/t_{PHL}/t_{sk}$ (B port) | Up   | Open |
| $t_t$ (A port) (see Note E)       | Down | X    |
| $t_t$ (B port) (see Note F)       | Up   | Open |

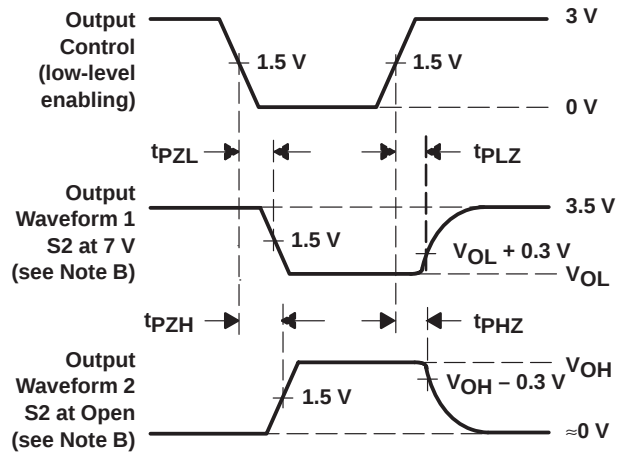

VOLTAGE WAVEFORMS  
ENABLE AND DISABLE TIMES

- NOTES: A.  $C_L$  includes probe and jig capacitance.  
 B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.  
 C. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10 \text{ MHz}$ ,  $Z_O = 50 \, \Omega$ ,  $t_r \leq 2.5 \text{ ns}$ ,  $t_f \leq 2.5 \text{ ns}$ .  
 D. The outputs are measured one at a time with one transition per measurement.  
 E.  $t_t$  is measured between 1 V and 2 V of the output waveform.  
 F.  $t_t$  is measured between 10% and 90% of the output waveform.

Figure 2. Load Circuit and Voltage Waveforms

## PACKAGING INFORMATION

| Orderable Device   | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|--------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| 74ABTE16246DGGRE4  | ACTIVE                | TSSOP        | DGG             | 48   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74ABTE16246DGGR  | ACTIVE                | TSSOP        | DGG             | 48   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74ABTE16246DL    | ACTIVE                | SSOP         | DL              | 48   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74ABTE16246DLG4  | ACTIVE                | SSOP         | DL              | 48   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74ABTE16246DLR   | ACTIVE                | SSOP         | DL              | 48   | 1000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74ABTE16246DLRG4 | ACTIVE                | SSOP         | DL              | 48   | 1000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## DL (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE PACKAGE

48 PINS SHOWN



- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).  
 D. Falls within JEDEC MO-118

## DGG (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE PACKAGE

48 PINS SHOWN



- NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold protrusion not to exceed 0,15.  
 D. Falls within JEDEC MO-153

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| <b>Products</b>    |                                                                    | <b>Applications</b> |                                                                          |
|--------------------|--------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------|
| Amplifiers         | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio               | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Data Converters    | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive          | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| DSP                | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Broadband           | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Interface          | <a href="http://interface.ti.com">interface.ti.com</a>             | Digital Control     | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Logic              | <a href="http://logic.ti.com">logic.ti.com</a>                     | Military            | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Power Mgmt         | <a href="http://power.ti.com">power.ti.com</a>                     | Optical Networking  | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Microcontrollers   | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security            | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
| Low Power Wireless | <a href="http://www.ti.com/lpw">www.ti.com/lpw</a>                 | Telephony           | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
|                    |                                                                    | Video & Imaging     | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
|                    |                                                                    | Wireless            | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2006, Texas Instruments Incorporated