

isc Silicon NPN Darlington Power Transistor

BDW23/A/B/C

DESCRIPTION



- Collector Current -I_C= 6A
- High DC Current Gain-h_{FE}= 750(Min)@ I_C= 2A
- Complement to Type BDW24/A/B/C

APPLICATIONS

- Designed for hammer drivers, audio amplifiers applications

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER		VALUE	UNIT
V _{CER}	Collector-Emitter Voltage	BDW23	45	V
		BDW23A	60	
		BDW23B	80	
		BDW23C	100	
V _{CEO}	Collector-Emitter Voltage	BDW23	45	V
		BDW23A	60	
		BDW23B	80	
		BDW23C	100	
V _{EBO}	Emitter-Base Voltage		5	V
I _C	Collector Current-Continuous		6	A
I _{CM}	Collector Current-Peak		8	A
I _B	Base Current-Continuous		0.2	A
P _C	Collector Power Dissipation @ T _C =25°C		50	W
T _J	Junction Temperature		150	°C
T _{stg}	Storage Temperature Range		-65~150	°C

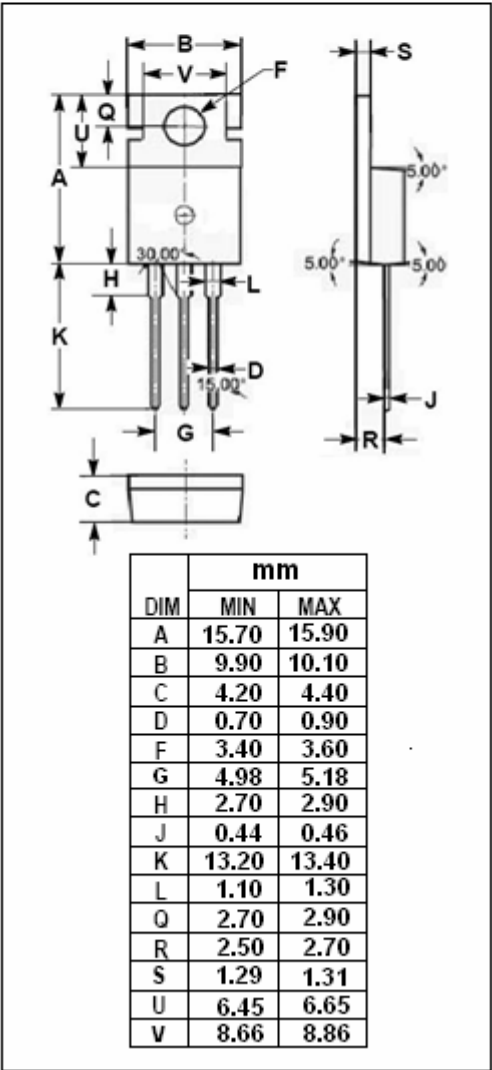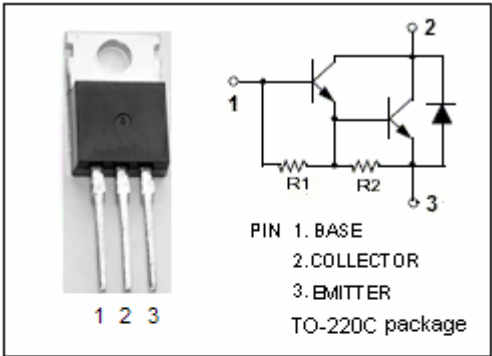

isc Silicon NPN Darlington Power Transistor

BDW23/A/B/C

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	BDW23	$I_C=100\text{mA}; I_B=0$	45			V
		BDW23A		60			
		BDW23B		80			
		BDW23C		100			
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage		$I_C=2\text{A}; I_B=8\text{mA}$			2	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage		$I_C=6\text{A}; I_B=60\text{mA}$			3	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage		$I_C=2\text{A}; I_B=8\text{mA}$			2.5	V
$V_{BE(on)-1}$	Base-Emitter On Voltage		$I_C=1\text{A}; V_{CE}=3\text{V}$			2.5	V
$V_{BE(on)-2}$	Base-Emitter On Voltage		$I_C=6\text{A}; V_{CE}=3\text{V}$			3	V
V_{ECF}	C-E Diode Forward Voltage		$I_F=2\text{A}$			1.8	V
I_{CEO}	Collector Cutoff Current	BDW23	$V_{CE}=22\text{V}; I_B=0$			0.5	mA
		BDW23A	$V_{CE}=30\text{V}; I_B=0$				
		BDW23B	$V_{CE}=40\text{V}; I_B=0$				
		BDW23C	$V_{CE}=50\text{V}; I_B=0$				
I_{CBO}	Collector Cutoff Current	BDW23	$V_{CB}=45\text{V}; I_E=0$			0.2	mA
		BDW23A	$V_{CB}=60\text{V}; I_E=0$				
		BDW23B	$V_{CB}=80\text{V}; I_E=0$				
		BDW23C	$V_{CB}=100\text{V}; I_E=0$				
I_{EBO}	Emitter Cutoff Current		$V_{EB}=5\text{V}; I_C=0$			2	mA
h_{FE-1}	DC Current Gain		$I_C=1\text{A}; V_{CE}=3\text{V}$	1000			
h_{FE-2}	DC Current Gain		$I_C=2\text{A}; V_{CE}=3\text{V}$	750		20000	
h_{FE-3}	DC Current Gain		$I_C=6\text{A}; V_{CE}=3\text{V}$	100			