

Circuit Breaker for Equipment thermal, 2 pole, Push button actuation, with auxiliary contact, with undervoltage



See below:

Approvals and Compliances

Description

- Thermal circuit breaker
- 1 or 2 pole thermal overload protection
- Positively trip-free release
- High configurability
- Snap-in or flange mounted
- Quick connect terminal 6.3 x 0.8 mm or screw clamp terminal M3.5 x 6 mm (lineside P1, P2)

Applications

- Power tools
- Industrial appliances
- Power supplies

Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Product News](#)

Technical Data

Rated Voltage AC	AC 240 VAC
Rated Voltage DC	60 VDC
Rated current range AC	0.05 - 20 A
Conditional short circuit capacity	IEC: Inc, PC1, AC 240 V: 1 kA
Degree of Protection	from front side IP40 acc. to IEC 60529
Dielectric Strength	4 kV
Insulation Resistance	500VDC > 100 MΩ
Lifetime	mechanical: 50'000 switching cycles
	AC: 1 x Ir: 50'000 switching cycles
	DC: 1 x Ir: 50'000 switching cycles

Overload	AC: min. 40trips @ 6 x Ir
	DC: min. 50trips @ 4 x Ir
Allowable Operation Temp.	-10°C to 55°C
Vibration Resistance	± 0.75 mm @ 5 - 60 Hz acc. to IEC 60068-2-6, test Fc 10 G @ 60 - 500 Hz acc. to IEC 60068-2-6, test Fc
Shock Resistance	30 G / 18ms acc. to IEC 60068-2-27, test Ea
Possible Tripping Types	Thermal Undervoltage release Remote trip Mechanical lock-out latch
Actuation Type	Pushbutton
Weight	45 - 60g

Approvals and Compliances




Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: TA45

Approval Logo	Certificates	Certification Body	Description
	VDE Approvals	VDE	VDE Certificate Number: 40019880
	UL Approvals	UL	UL File Number: E71572
	CCC Approvals	CCC	CCC Certificate Number: 2013010307660082

Product standards

Product standards that are referenced

Organization	Design	Standard	Description
	Designed according to	IEC 60934	Circuit-breakers for equipment (CBE)
	Designed according to	UL 1077	Standard for Supplementary Protectors for Use in Electrical Equipment
	Designed according to	CSA C22.2 No. 235	Supplementary Protectors
	Designed according to	GB 17701	Circuit-breaker for equipment





Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment.


Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/836
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimension [mm]


Snap-in type and quick connect terminal with auxiliary contact
 Undervoltage release, remote trip release

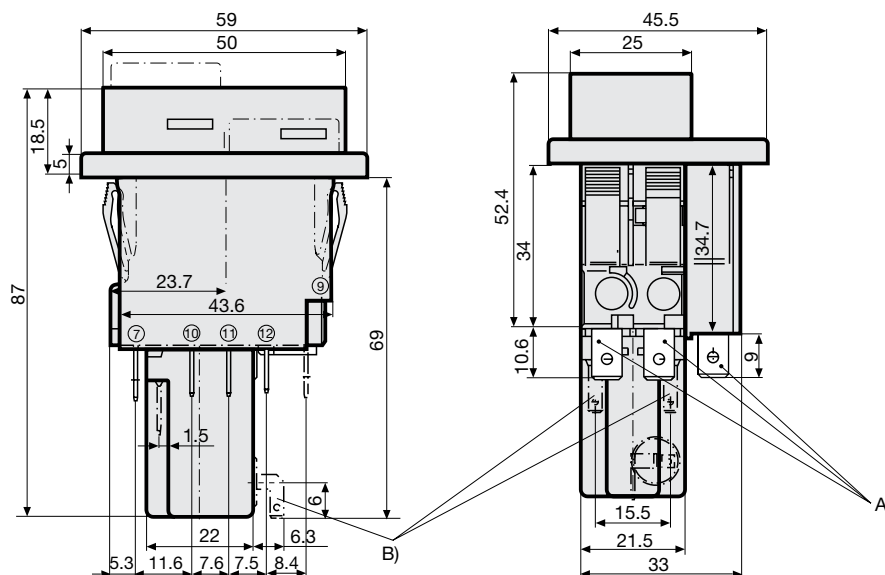

A) Quick connect terminal, IEC 61210, A6.3-0.8 mm

B) Quick connect terminal, IEC 61210, A2.8-0.8 mm

Flange type and quick connect terminal with auxiliary contact
 Mechanical lock-out latch

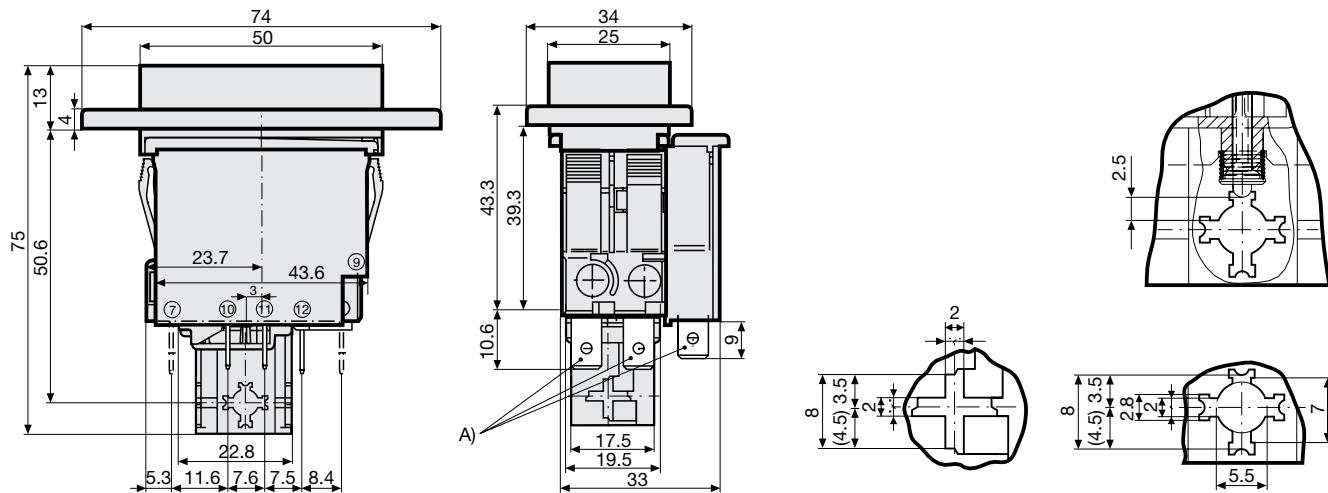


A) Quick connect terminal, IEC 61210, A6.3-0.8 mm

*) max. switching stroke


Cut-out and pin-out

Cut-out snap-in type

Cut-out flange type / Installation from rear

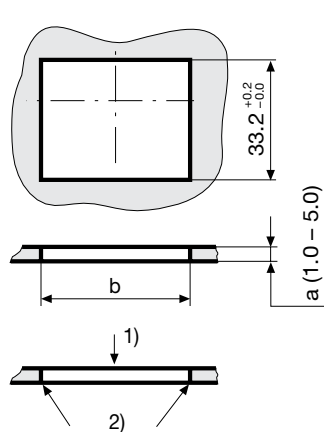



a	b
1.0	44,5...45,0
1.5	44,5...45,0
2.0	44,7...45,2
2.5	44,7...45,2
3.0	44,8...45,3
4.0	44,9...45,4
5.0	45,0...45,5

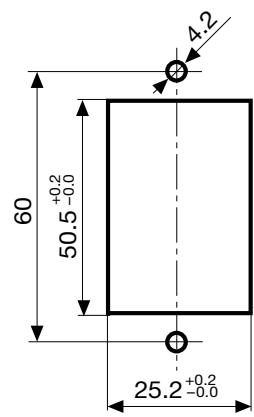

- 1) Assemble
- 2) edge must be sharp

Cut-out flange type/ Installation from rear with AZZ05 cover


Pin-out

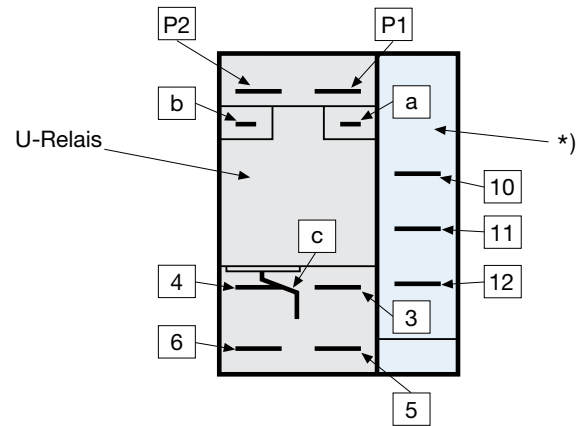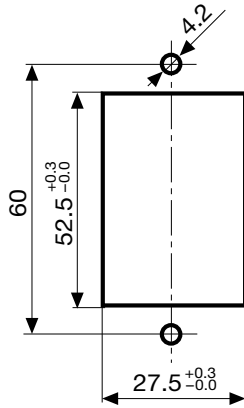


*) Auxiliary contact

Diagrams


1pole thermal overload protection, Auxiliary contact




1pole thermal overload protection, Auxiliary contact, Shunt terminal




2pole thermal overload protection, Auxiliary contact




2pole thermal overload protection, Auxiliary contact, Shunt terminal




Undervoltage release




Undervoltage release with additional contact




Undervoltage release with 2 additional contacts




Remote trip release



Mechanical lock-out latch




Time-Current-Curves

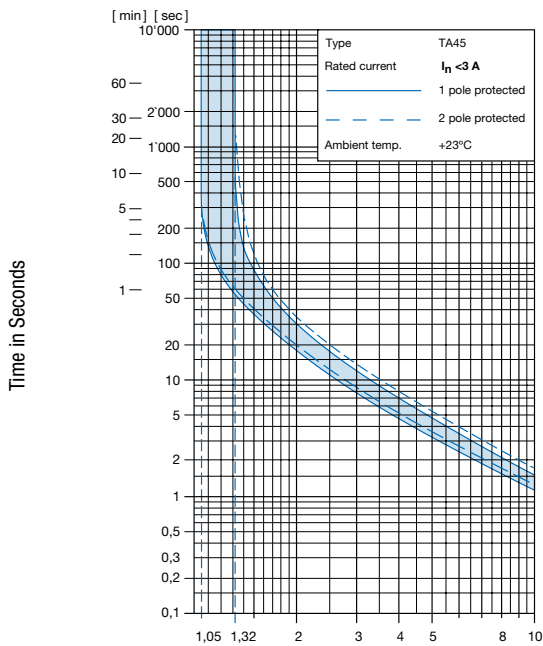


Multiple of Rated Current I_n

Reference Temperature +23°

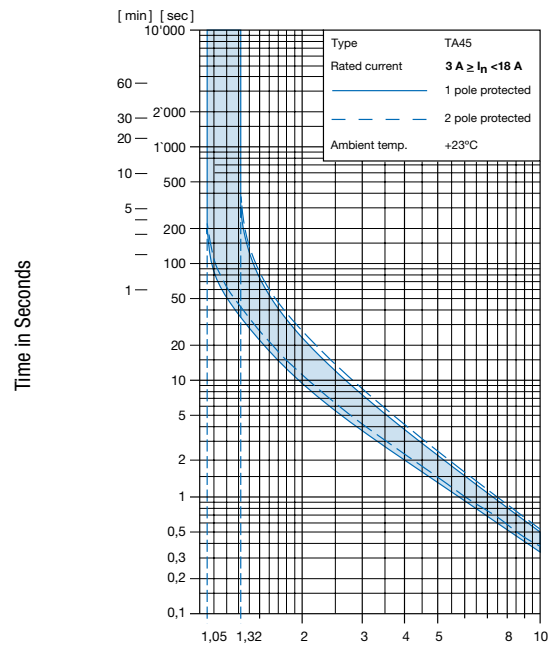

Multiple of Rated Current I_n

Reference Temperature +23°

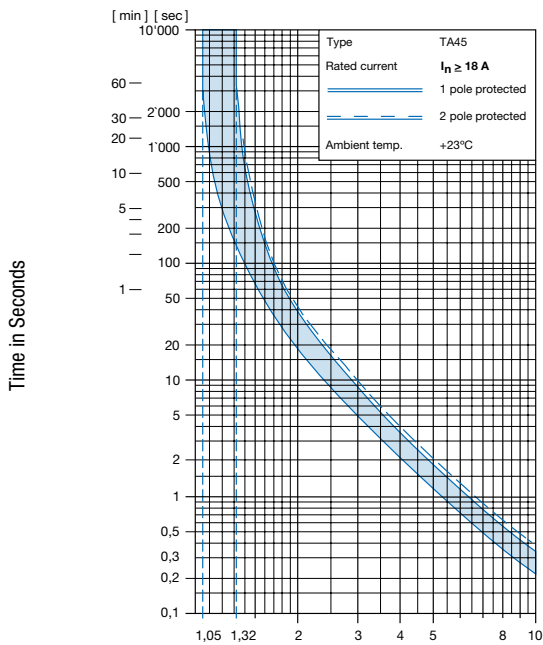

Multiple of Rated Current I_n

Reference Temperature +23°

Effect of ambient temperature

The units are calibrated for an ambient temperature of +23°C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

Ambient Temperature [°C]	Correction factor
-10	0.89
-5	0.91
0	0.92
+23	1.00
+30	1.03
+40	1.08
+55	1.16

Example: Rated current = 5 A, Environmental temperature = 40 °C, --> Correction factor = 1.08, Resulting current = 5.5 A --> Fount to next higher rated current: 6 A

Auxiliary contact (changeover)

Rated Voltage	28 VDC	60 VDC	240 VAC
Rated current	max. 10 A resistive load	max. 2 A resistive load	max. 2 A cos φ 0.7

Undervoltage release

Max. operating voltage								1.1 Ue
Rated operating voltage Ue	5 V	12 V	24 V	48 V	120 V	240 V	400 V ¹⁾	
Current consumption (± 10%)	10.5 mA	16.5 mA	17.0 mA	3.2 mA	3.7 mA	3.1 mA	2.65 mA	
Highest reset level								0.85 Ue
Lowest trip level								0.20 Ue
Trip delay								20 ms - 50 ms
Impulse withstand voltage (1.2 / 50 µs)								≥4 kV
1) only for 3pole								

Remote trip

Permissible impuls duration of the make contact (no)	Between terminal C and P1	unlimited
Electrical load of the make contact (no)	Current max. 12 mA / power max. 1.1 W	

Config. Code

TA45 - AK2 W F 120 A2 - AZM11

The characters are placeholders for the correspondingly keys of selections from the key tables.

TA45 - **AK2** W F 120 A2 - AZM11 = Basic function


Basic function	Configuration key	Basic function	Configuration key
2-pole, push button, 1pole overload protection, auxiliary contact, quick connect terminal, flange type, push button gasket IP40	ALL	2-pole, push button, 1p overload protection, auxiliary contact and shunt terminal, screw connection, flange type, push button gasket IP40	APM
2-pole, push button, 1p overload protection, auxiliary contact and shunt terminal, quick connect terminal, flange type, push button gasket IP40	ALM	2-pole, push button, 2p overload protection, auxiliary contact, screw connection, flange type, push button gasket IP40	APN
2-pole, push button, 2p overload protection, auxiliary contact, quick connect terminal, flange type, push button gasket IP40	ALN	2-pole, push button, 2p overload protection, auxiliary contact and shunt terminal, screw connection, flange type, push button gasket IP40	APP
2-pole, push button, 2p overload protection, auxiliary contact and shunt terminal, quick connect terminal, flange type, push button gasket IP40	ALP	2-pole, push button, 1pole overload protection, auxiliary contact, screw connection, flange type, push button gasket IP65	APU
2-pole, push button, 1pole overload protection, auxiliary contact, quick connect terminal, flange type, push button gasket IP65	ALU	2-pole, push button, 1p overload protection, auxiliary contact and shunt terminal, screw connection, flange type, push button gasket IP65	APV
2-pole, push button, 1p overload protection, auxiliary contact and shunt terminal, quick connect terminal, flange type, push button gasket IP65	ALV	2-pole, push button, 2p overload protection, auxiliary contact, screw connection, flange type, push button gasket IP65	APW
2-pole, push button, 2p overload protection, auxiliary contact, quick connect terminal, flange type, push button gasket IP65	ALW	2-pole, push button, 2p overload protection, auxiliary contact and shunt terminal, screw connection, flange type, push button gasket IP65	APX
2-pole, push button, 2p overload protection, auxiliary contact and shunt terminal, quick connect terminal, flange type, push button gasket IP65	ALX	2-pole, push button, 1pole overload protection, auxiliary contact, quick connect terminal, snap-in type, push button gasket IP40	AUL
2-pole, push button, 1pole overload protection, auxiliary contact, screw connection, flange type, push button gasket IP40	APL	2-pole, push button, 1p overload protection, auxiliary contact and shunt terminal, quick connect terminal, snap-in type, push button gasket IP40	AUM
		2-pole, push button, 2p overload protection, auxiliary contact, quick connect terminal, snap-in type, push button gasket IP40	AUN

Basic function	Configuration key
2-pole, push button, 2p overload protection, auxiliary contact and shunt terminal, quick connect terminal, snap-in type, push button gasket IP40	AUP
2-pole, push button, 1pole overload protection, auxiliary contact, quick connect terminal, snap-in type, push button gasket IP65	AUU
2-pole, push button, 1p overload protection, auxiliary contact and shunt terminal, quick connect terminal, snap-in type, push button gasket IP65	AUV
2-pole, push button, 2p overload protection, auxiliary contact, quick connect terminal, snap-in type, push button gasket IP65	AUW
2-pole, push button, 2p overload protection, auxiliary contact and shunt terminal, quick connect terminal, snap-in type, push button gasket IP65	AUX
2-pole, push button, 1pole overload protection, auxiliary contact, screw connection, snap-in type, push button gasket IP40	AXL
2-pole, push button, 1p overload protection, auxiliary contact and shunt terminal, screw connection, snap-in type, push button gasket IP40	AXM
2-pole, push button, 2p overload protection, auxiliary contact, screw connection, snap-in type, push button gasket IP40	AXN
2-pole, push button, 2p overload protection, auxiliary contact and shunt terminal, screw connection, snap-in type, push button gasket IP40	AXP
2-pole, push button, 1pole overload protection, auxiliary contact, screw connection, snap-in type, push button gasket IP65	AXU
2-pole, push button, 1p overload protection, auxiliary contact and shunt terminal, screw connection, snap-in type, push button gasket IP65	AXV
2-pole, push button, 2p overload protection, auxiliary contact, screw connection, snap-in type, push button gasket IP65	AXW
2-pole, push button, 2pole overload protection, auxiliary contact, screw connection, snap-in type, push button gasket IP65	AXX

TA45 - AK2 **W** F 120 A2 - AZM11 = Actuator colour

Actuator colour	Configuration key
Front Black: Green/Red	T
Front Yellow: Green/Red	U
Front Grey: Green/Red	V

TA45 - AK2 **W** F 120 A2 - AZM11 = Legend

Legend	Configuration key
embossed 	F
white printed 	H
black printed 	K
white printed 	L
black printed 	M
white printed 	P
black printed 	R
white printed 	S
black printed 	T

TA45 - AK2 **W** F 120 A2 - AZM11 = Rated current

Rated current	Configuration key
0.05 A	Z05
0.1 A	J01
0.2 A	J02
0.3 A	J03
0.4 A	J04
0.5 A	J05
0.6 A	J06
0.7 A	J07
0.8 A	J08
0.9 A	J09
1.0 A	J10
1.1 A	J11
1.2 A	J12
1.3 A	J13
1.4 A	J14
1.5 A	J15
1.6 A	J16
1.7 A	J17
1.8 A	J18
1.9 A	J19
2.0 A	J20
2.1 A	J21
2.2 A	J22
2.3 A	J23
2.5 A	J25
2.8 A	J28
3.0 A	030
3.5 A	035
4.0 A	040
4.5 A	045
5.0 A	050
6.0 A	060
6.5 A	065
7.0 A	070
7.5 A	075
8.0 A	080
9.0 A	090
10.0 A	100
11.0 A	110
12.0 A	120
13.0 A	130
14.0 A	140
15.0 A	150
16.0 A	160
17.0 A	170
18.0 A	180
19.0 A	190
20.0 A	200

Other rated currents on request

TA45 - AK2 **W** F 120 **A2** - AZM11 = Release / lock-out latch

Release / lock-out latch	Configuration key
Remote trip release, rated voltage 240 V AC	A2
Remote trip release, rated voltage 230 V AC	A3
Remote trip release, rated voltage 120 V AC	A4
Remote trip release, rated voltage 48 V AC / DC	A6
Remote trip release, rated voltage 24 V AC / DC	A7
Remote trip release, rated voltage 12 V AC / DC	A8
without release / lock-out latch	C0
Undervoltage release with additional contact, rated voltage 240 V AC	E2
Undervoltage release with additional contact, rated voltage 230 V AC	E3
Undervoltage release with additional contact, rated voltage 120 V AC	E4
Undervoltage release with additional contact, rated voltage 48 V AC / DC	E6
Undervoltage release with additional contact, rated voltage 24 V AC / DC	E7
Undervoltage release with additional contact, rated voltage 12 V AC / DC	E8
Undervoltage release with additional contact, rated voltage 5 V AC / DC	E9
Mechanical lock-out latch	S0
Undervoltage release, rated voltage 240 V AC	U2
Undervoltage release, rated voltage 230 V AC	U3
Undervoltage release, rated voltage 120 V AC	U4
Undervoltage release, rated voltage 48 V AC / DC	U6

Release / lock-out latch	Configuration key
Undervoltage release, rated voltage 24 V AC / DC	U7
Undervoltage release, rated voltage 12 V AC / DC	U8
Undervoltage release, rated voltage 5 V AC / DC	U9
Undervoltage release with 2 additional contacts, rated voltage 240 V AC	Z2
Undervoltage release with 2 additional contacts, rated voltage 230 V AC	Z3
Undervoltage release with 2 additional contacts, rated voltage 120 V AC	Z4
Undervoltage release with 2 additional contacts, rated voltage 48 V AC / DC	Z6
Undervoltage release with 2 additional contacts, rated voltage 24 V AC / DC	Z7
Undervoltage release with 2 additional contacts, rated voltage 12 V AC / DC	Z8
Undervoltage release with 2 additional contacts, rated voltage 5 V AC / DC	Z9

TA45 - AK2 W F 120 A2 - **AZM11** = Accessories

Factory mounted accessories	Configuration key
Without cover	

For subsequent fitting accessories see:

https://www.schurter.com/pdf/english/typ_TA45-ACC.pdf

Packaging Unit 1 Pcs

Accessories

Description



TA45-ACC
 Accessories to TA45