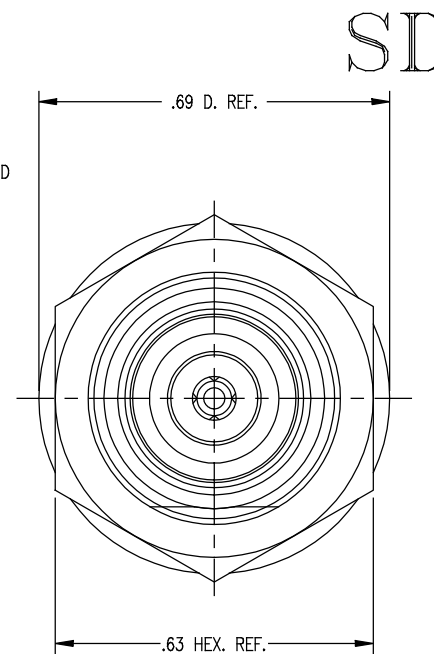
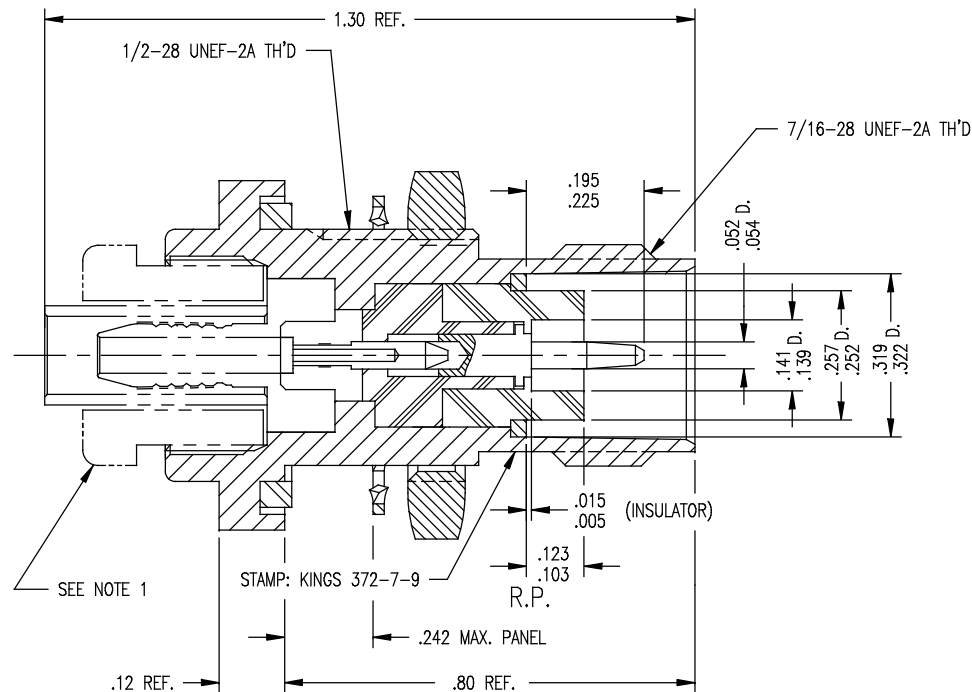


MOUNTING HOLE

NOTES:

- CONNECTOR USES WITH CABLE TERMINATION KIT 3208-1-9 SUPPLIED SEPARATELY.
- FOR CABLING INSTRUCTIONS SEE 3-673.
- INTERFACE PER MIL-STD-348, FIG. 313-1 (AS APPLICABLE).
- MATERIALS:
INSULATORS: TEFLON, ASTM-D-4894
GASKET: SILICONE RUBBER, ZZ-R-765
CENTER CONTACT: BER. COPPER, ASTM-B-196
LOCKWASHER: PHOSPHOR BRONZE, ASTM-B-103
ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISHES:
CENTER CONTACTS: HARD GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS NICKEL FINISH PER QQ-N-290
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHM
WORKING VOLTAGE: 500 VOLTS RMS
VSWR: 1.60 MAX. DC TO 2.4GHz.
- MARK PACKAGE: KINGS 372-7-9
YRWK (DATE CODE)

SD

372-7-9

REVISIONS

ISSUE	CHANGES
0	ER 37906 HVN 09/23/99

372-7-9

SCALE	4:1
APPROX SURFACE AREA	
WAS:	372-6-9
USED ON	
REF:	INTERMEC 058905-002 REV. C

JK, BKHD, POL, TNC

DRAWN	HVN	DATE	07/09/99
DESIGN	HVN	DATE	07/09/99
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

372-7-9

SD