



PRODUCT DATASHEET

Florentina series

last update 23/1/2018


DETAILS

Product Number	FC15353_FLORENTINA-4X1-O
Family	Florentina
Type	Pack
Color	black
Diameter	175,57x55,57 mm
Height	17,72 mm
Style	rectang
Optic Material	PC
Holder Material	
Fastening	pin, screw
Status	production ready
ROHS Compliant	Yes
Date Updated	23/01/2018



OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Effi- ciency	cd/lm	Connector
XP-G2	41+17 deg	Oval	71 %	2.900	-
NVSxx19B/NVSxx19C	44+16 deg	Oval	79 %	2.900	-
Oslon Square Gen3	44+15 deg	Oval	74 %	3.000	-

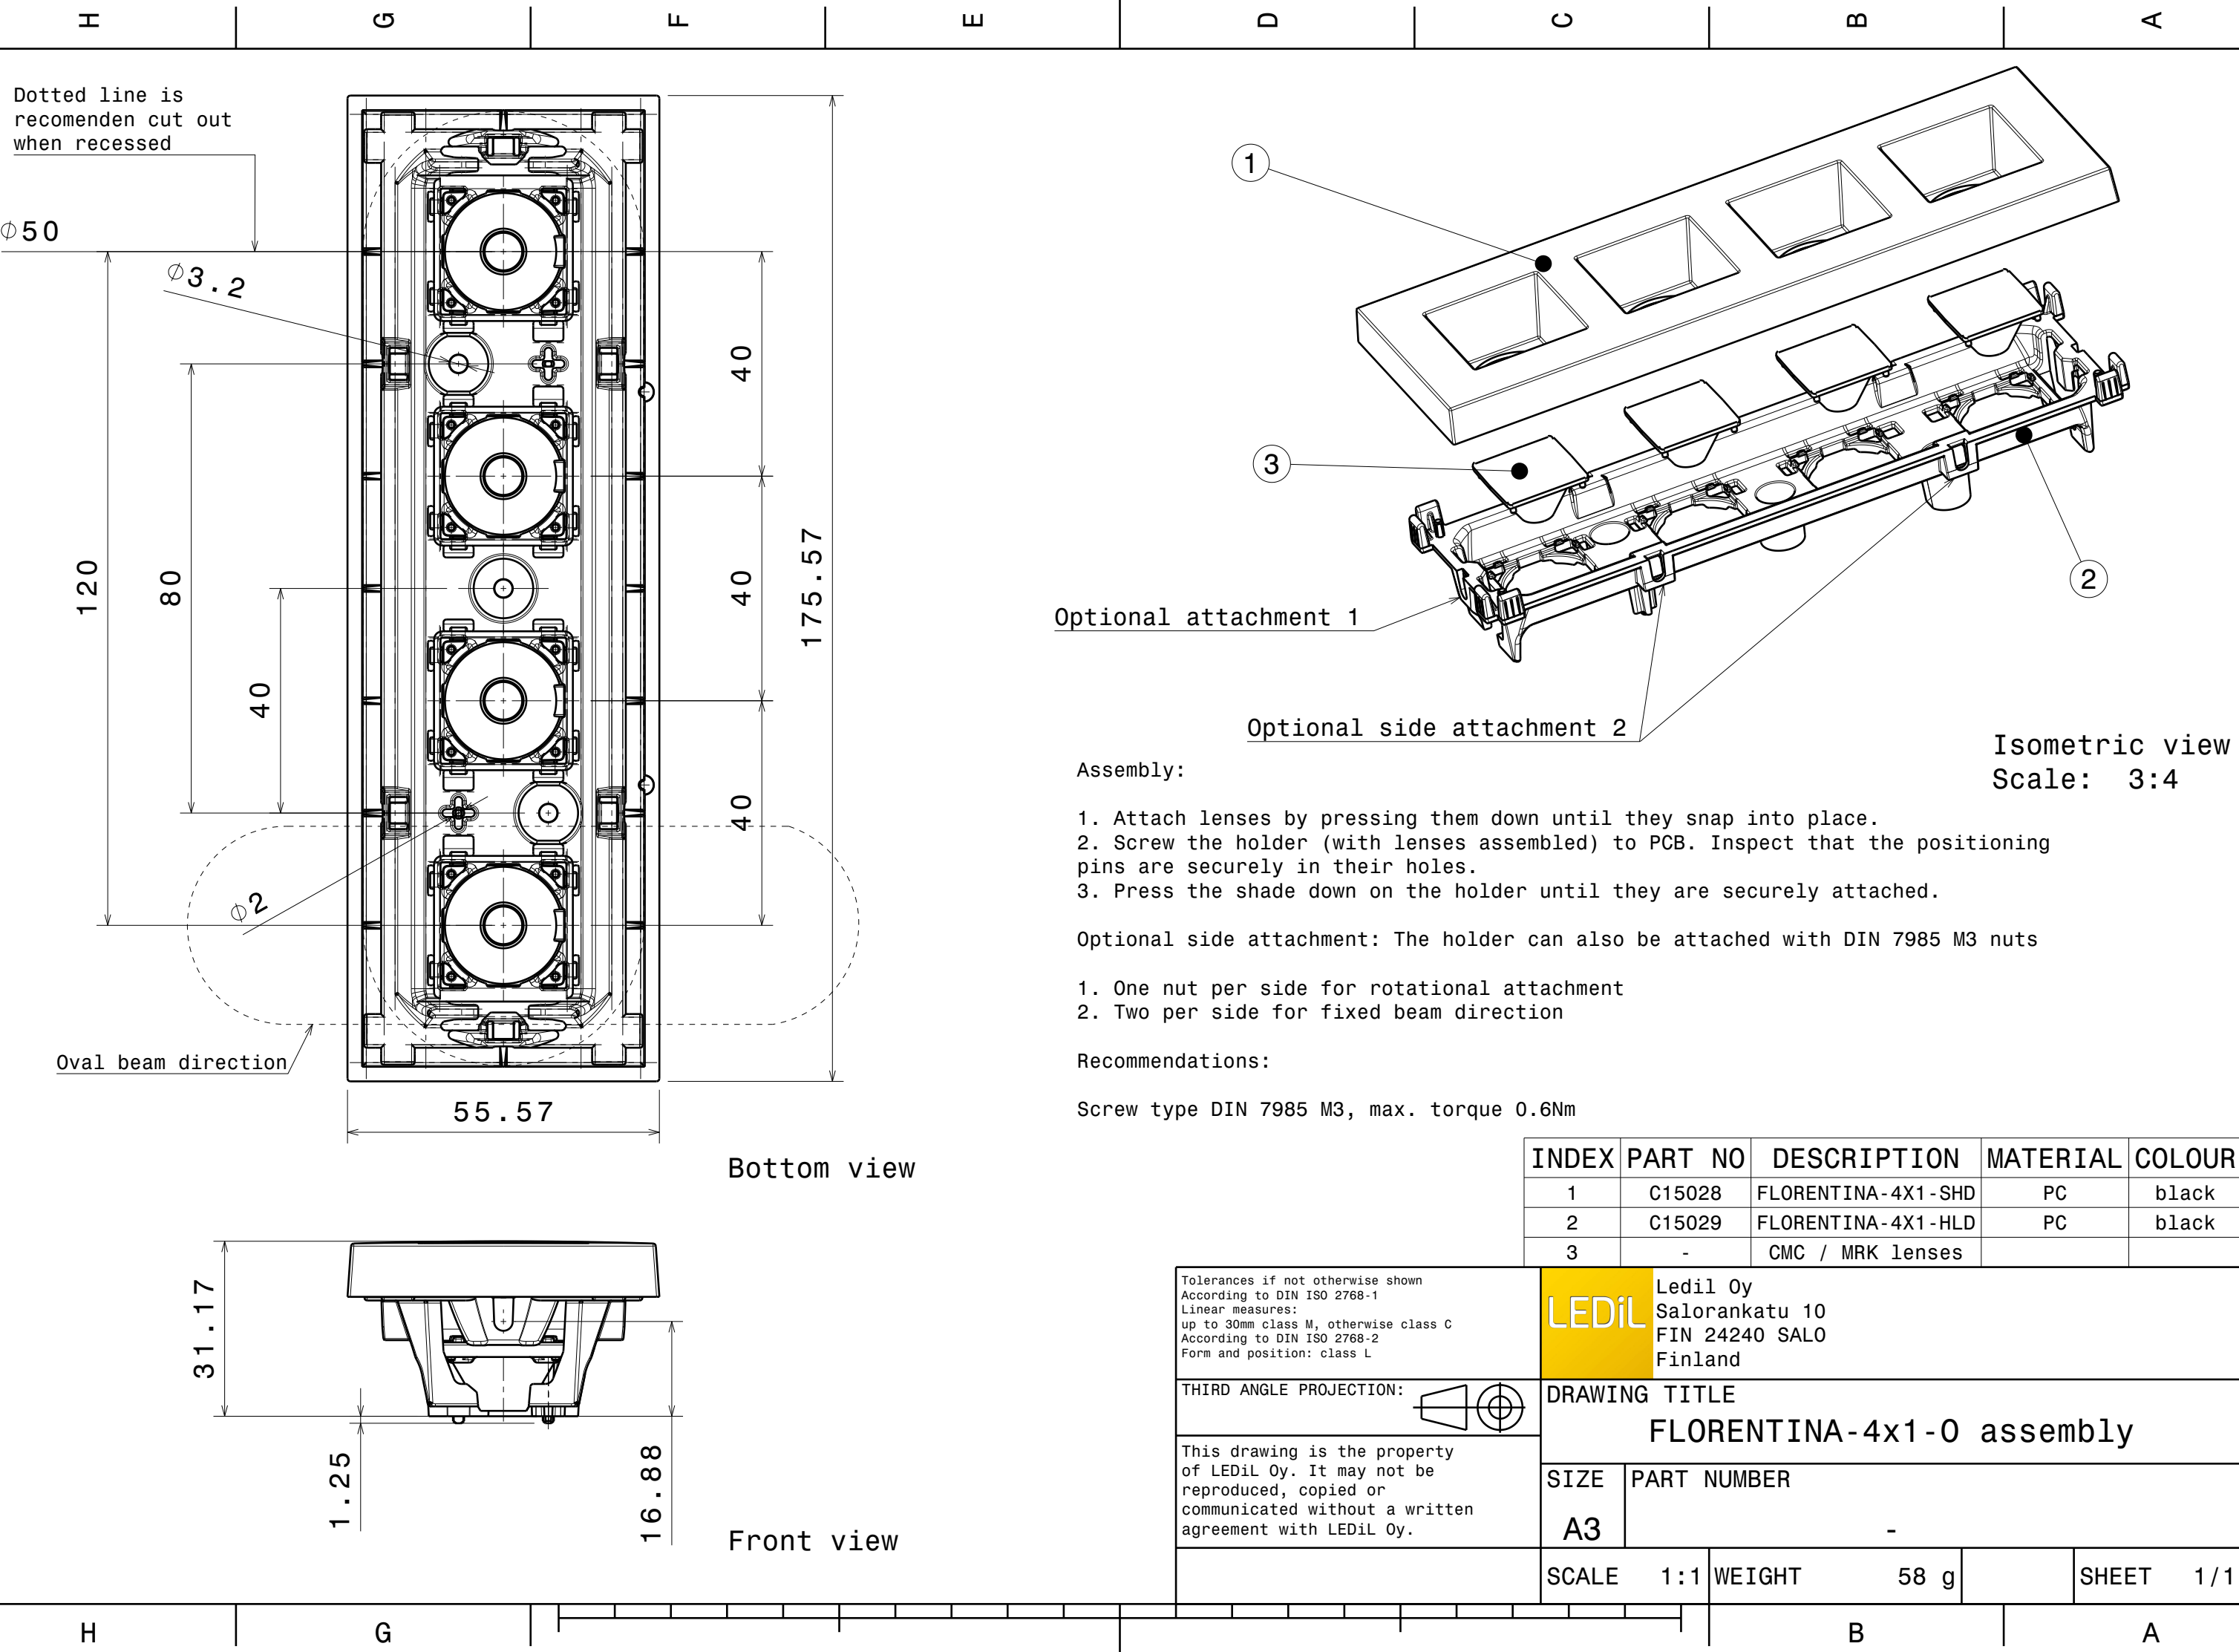

Optional attachment 1

Optional side attachment 2

Isometric view
Scale: 3:4

Assembly:

1. Attach lenses by pressing them down until they snap into place.
2. Screw the holder (with lenses assembled) to PCB. Inspect that the positioning pins are securely in their holes.
3. Press the shade down on the holder until they are securely attached.

Optional side attachment: The holder can also be attached with DIN 7985 M3 nuts

1. One nut per side for rotational attachment
2. Two per side for fixed beam direction

Recommendations:

Screw type DIN 7985 M3, max. torque 0.6Nm

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C15028	FLORENTINA-4X1-SHD	PC	black
2	C15029	FLORENTINA-4X1-HLD	PC	black
3	-	CMC / MRK lenses		

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
up to 30mm class M, otherwise class C
According to DIN ISO 2768-2
Form and position: class L

LEDiL

Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

THIRD ANGLE PROJECTION:


DRAWING TITLE
FLORENTINA-4x1-0 assembly

This drawing is the property
of LEDiL Oy. It may not be
reproduced, copied or
communicated without a written
agreement with LEDiL Oy.


SIZE	PART NUMBER
A3	-

SCALE	1:1	WEIGHT	58 g	SHEET	1/1
-------	-----	--------	------	-------	-----

Luminaire: Ledil FC15353_FLORENTINA-4X1-O_(XP-G2)
Lamps: 1 x Cree_XP-G2_1x4_(XPGBWT-H1-7A2-Q4-0-01)_335.917lm@250mA_P=2.9045W_I=0.25A

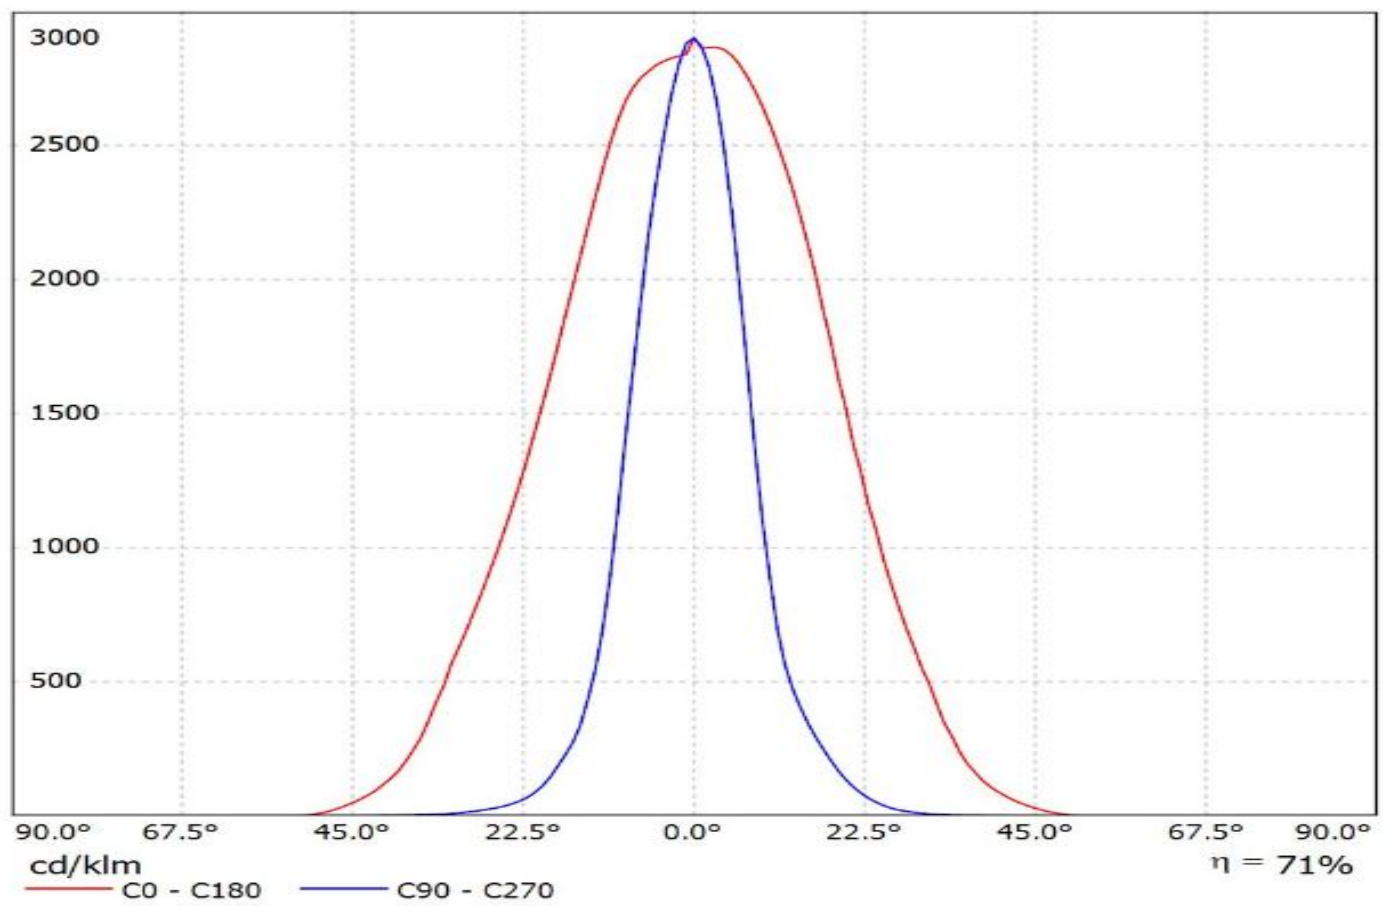


Luminaire: LEDiL Oy FC15353_FLORENTINA-4X1-O_(NVSL219BE)
Lamps: 1 x Nichia_NVSL219BE_4x1_320.463lm@250mA_P=2.77977W_I=0.25A

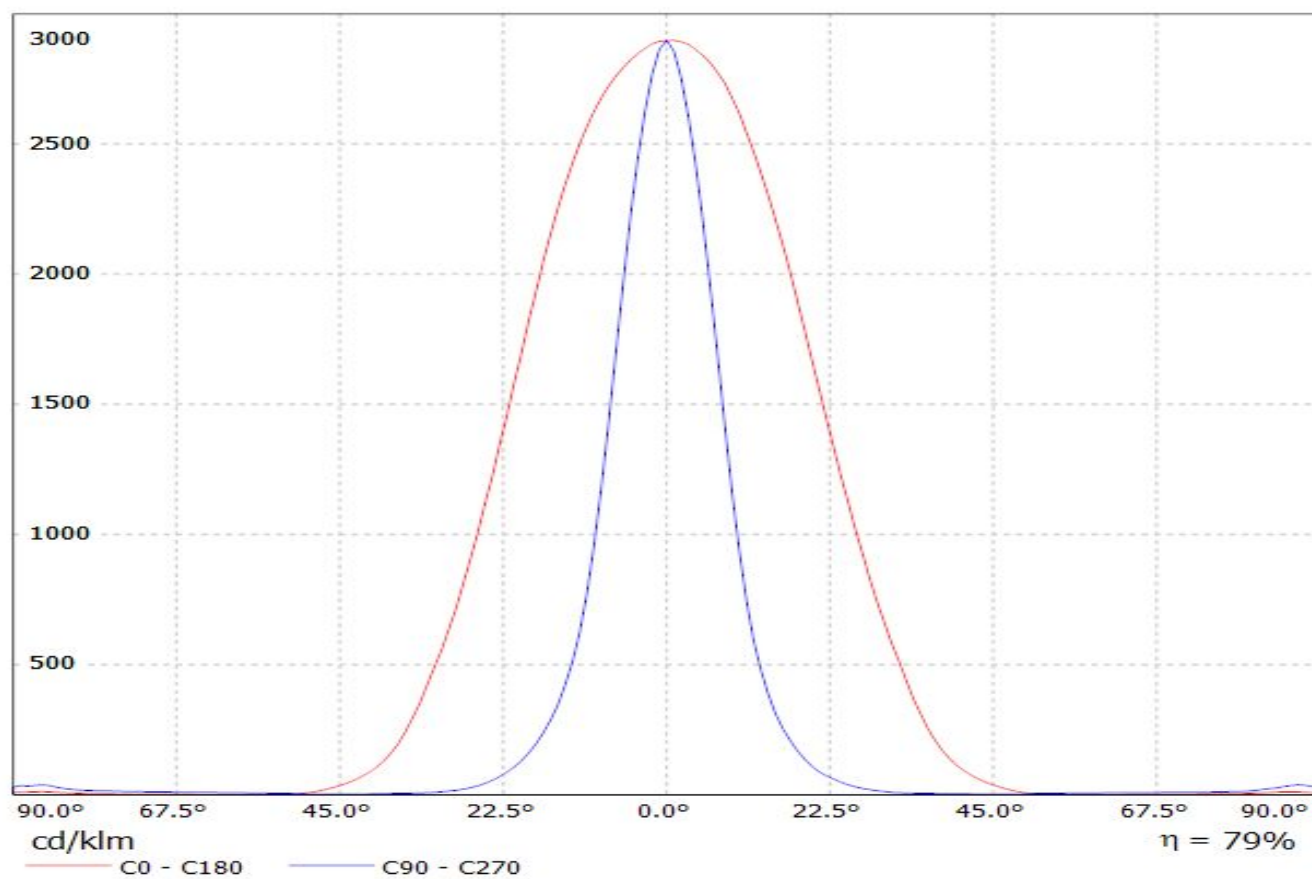


Luminaire: Ledil FC15353_FLORENTINA-4X1-O_(SQ_Gen3)

Lamps: 1 x Osram_Square_Gen3_4x1_(GW_CSSRM2.PM-MUNQ-A737-1)_455.587lm@250mA_P=2.78475W_I=0.25A

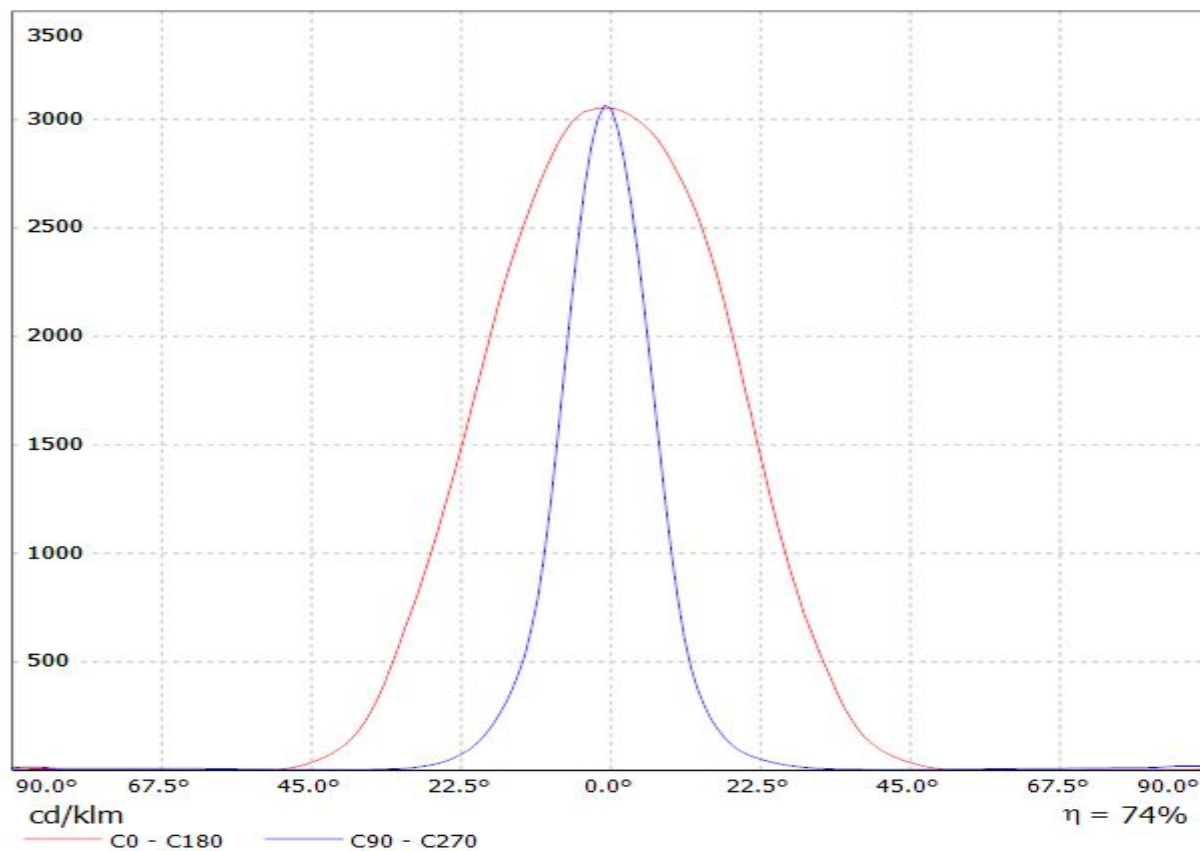

Luminaire: Ledil FC15353_FLORENTINA-4X1-O_(XP-G2)

Lamps: 1 x Cree_XP-G2_1x4_(XPGBWT-H1-7A2-Q4-0-01)_335.917lm@250mA_P=2.9045W_I=0.25A

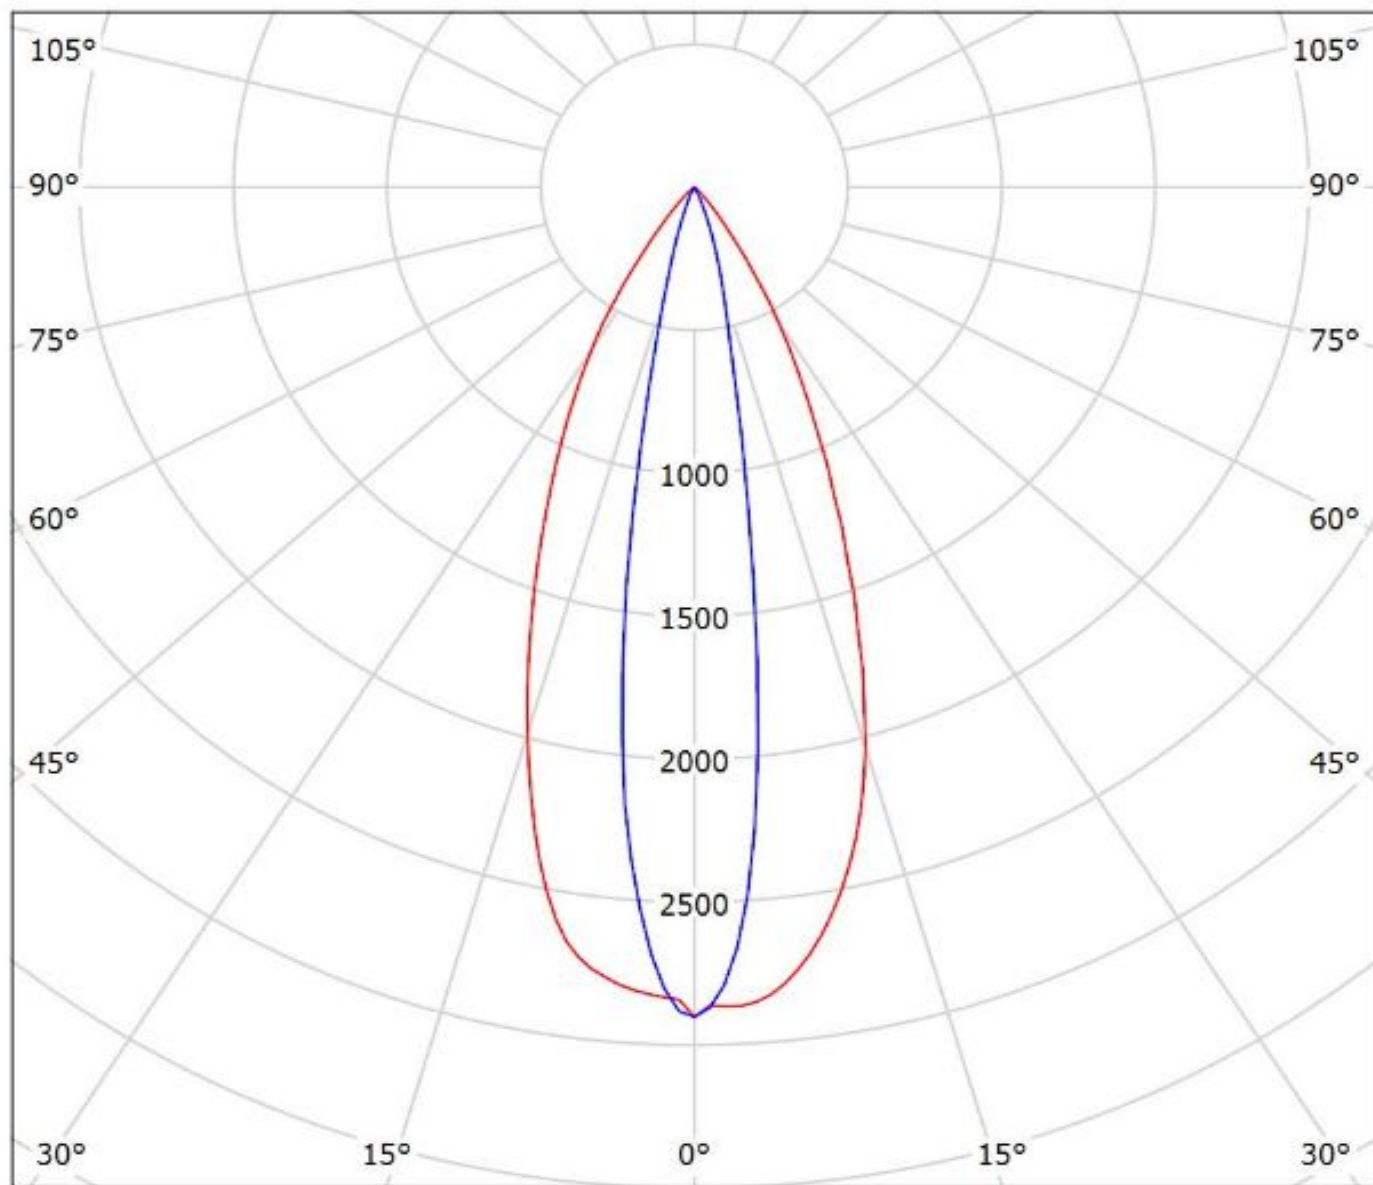

cd/klm


— C0 - C180

— C90 - C270

$\eta = 71\%$

Luminaire: LEDiL Oy FC15353_FLORENTINA-4X1-O_(NVSL219BE)

Lamps: 1 x Nichia_NVSL219BE_4x1_320.463lm@250mA_P=2.77977W_I=0.25A

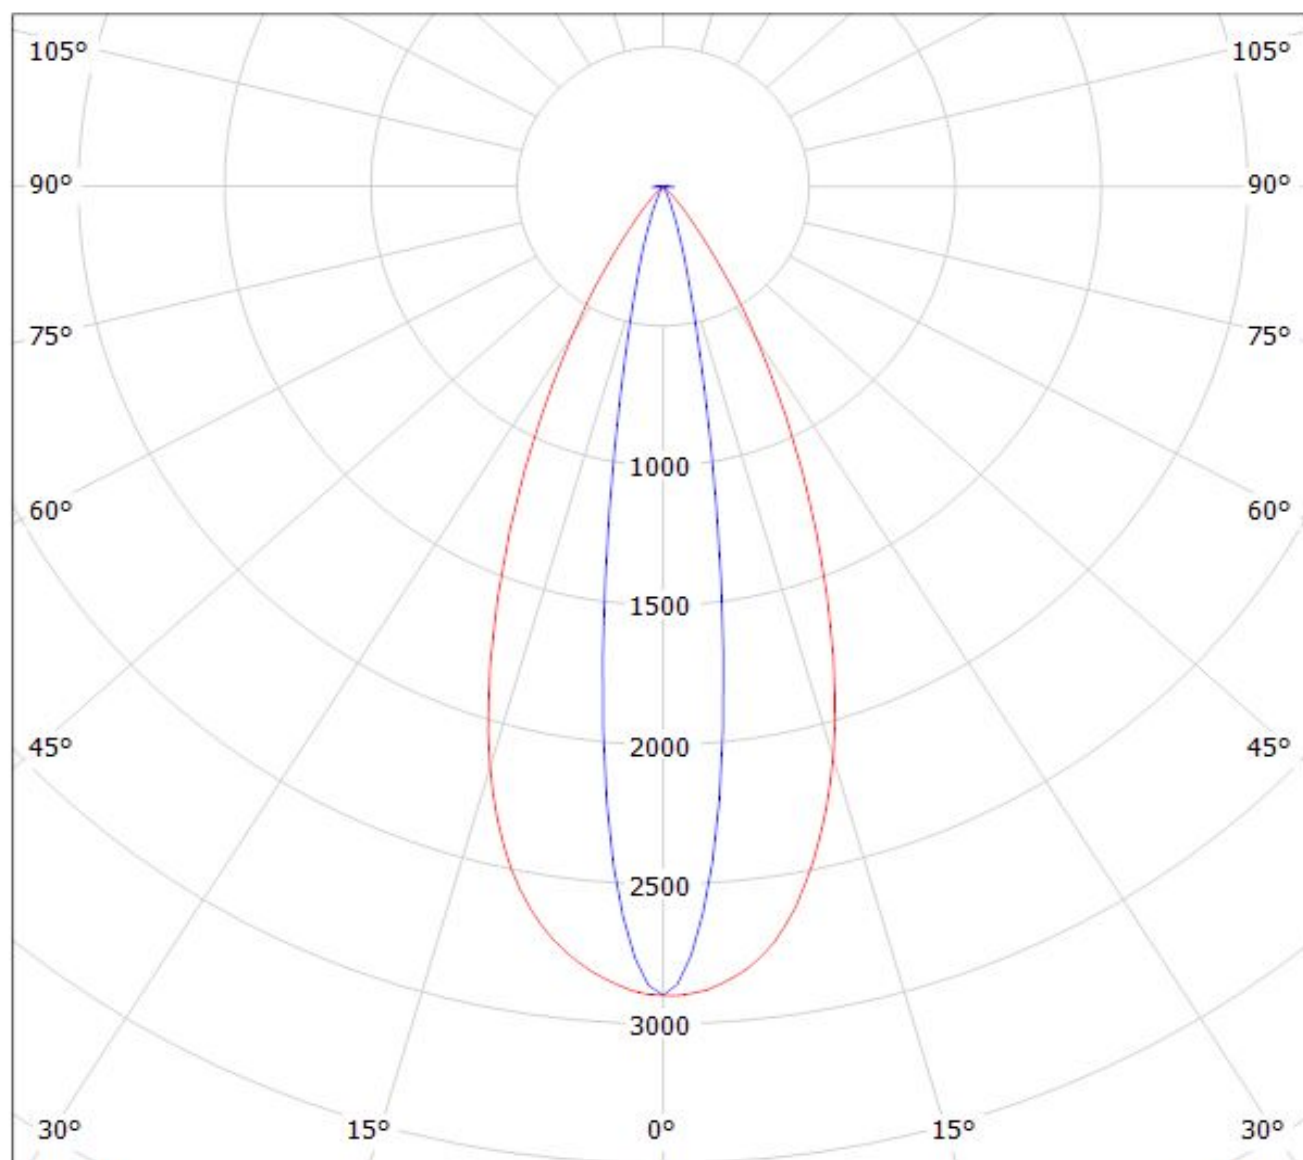

cd/klm


— C0 - C180

— C90 - C270

$\eta = 79\%$

Luminaire: Ledil FC15353_FLORENTINA-4X1-O_(SQ_Gen3)

Lamps: 1 x Osram_Square_Gen3_4x1_(GW_CSSRM2.PM-MUNQ-A737-1)_455.587lm@250mA_P=2.78475W_I=0.25A

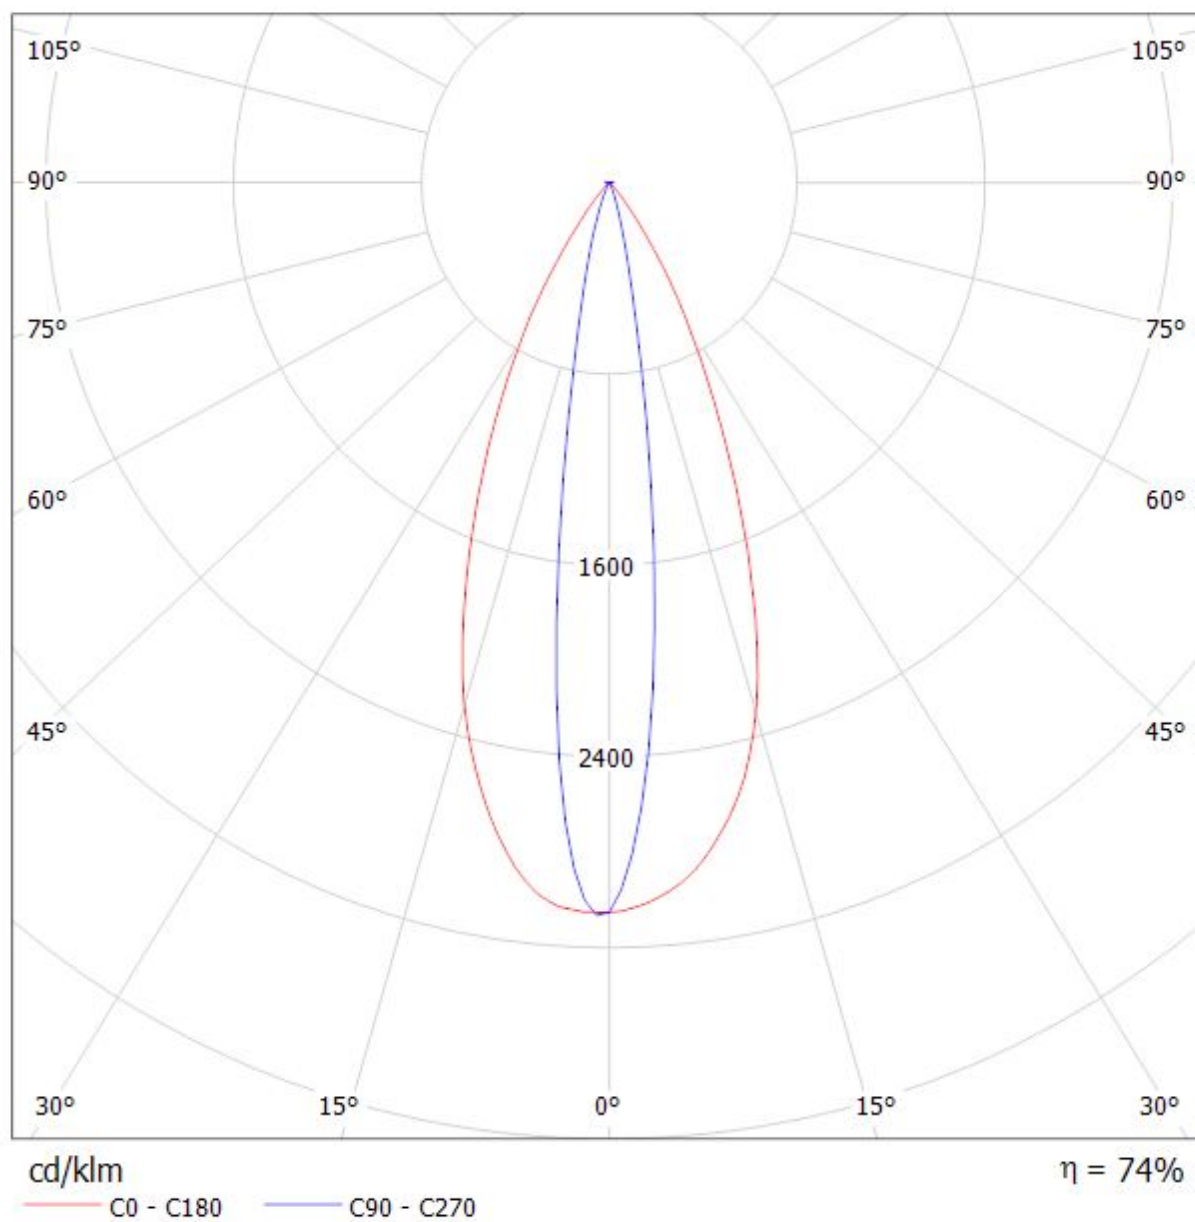

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.